


TUNGTHREAD


www.tungaloy.com

Tungaloy Report No. 375-G


Expansion with **8 mm and 10 mm shank holders**,
11ER inserts, and **full-profile inserts** for TetraMini-Cut

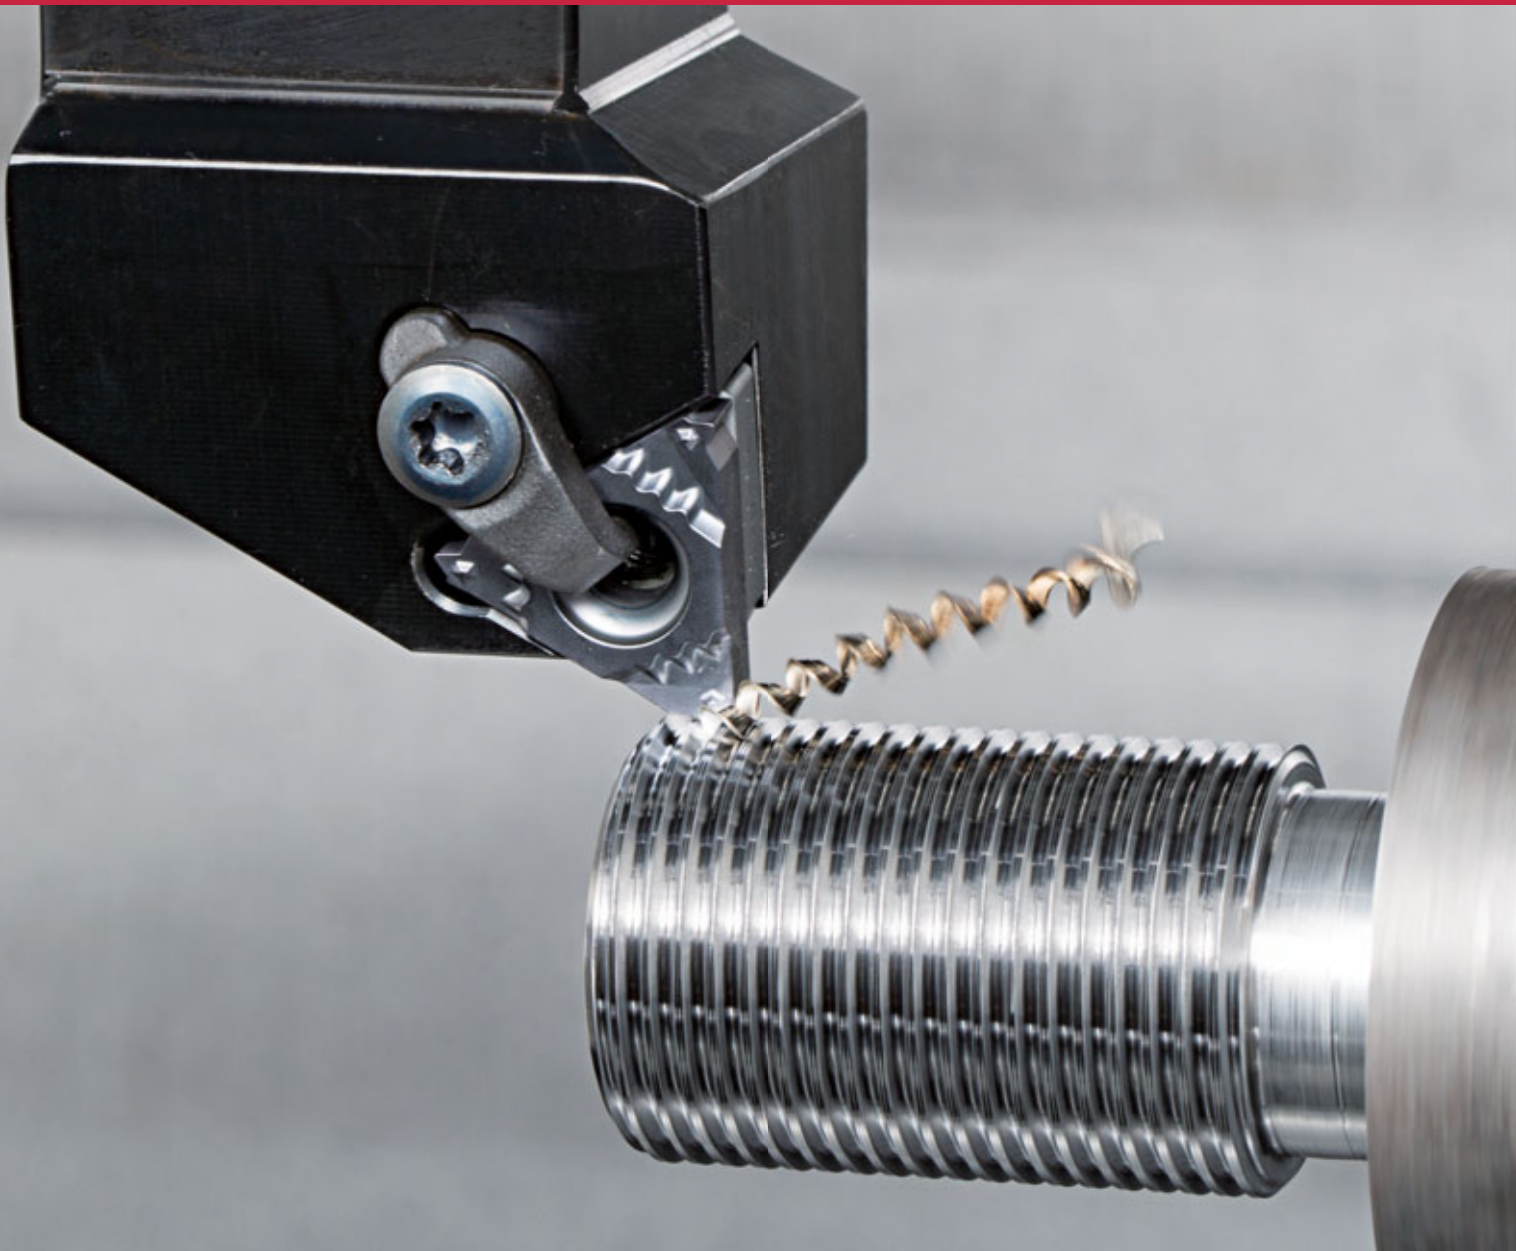

INDUSTRY 4.0
FEED the SPEED!

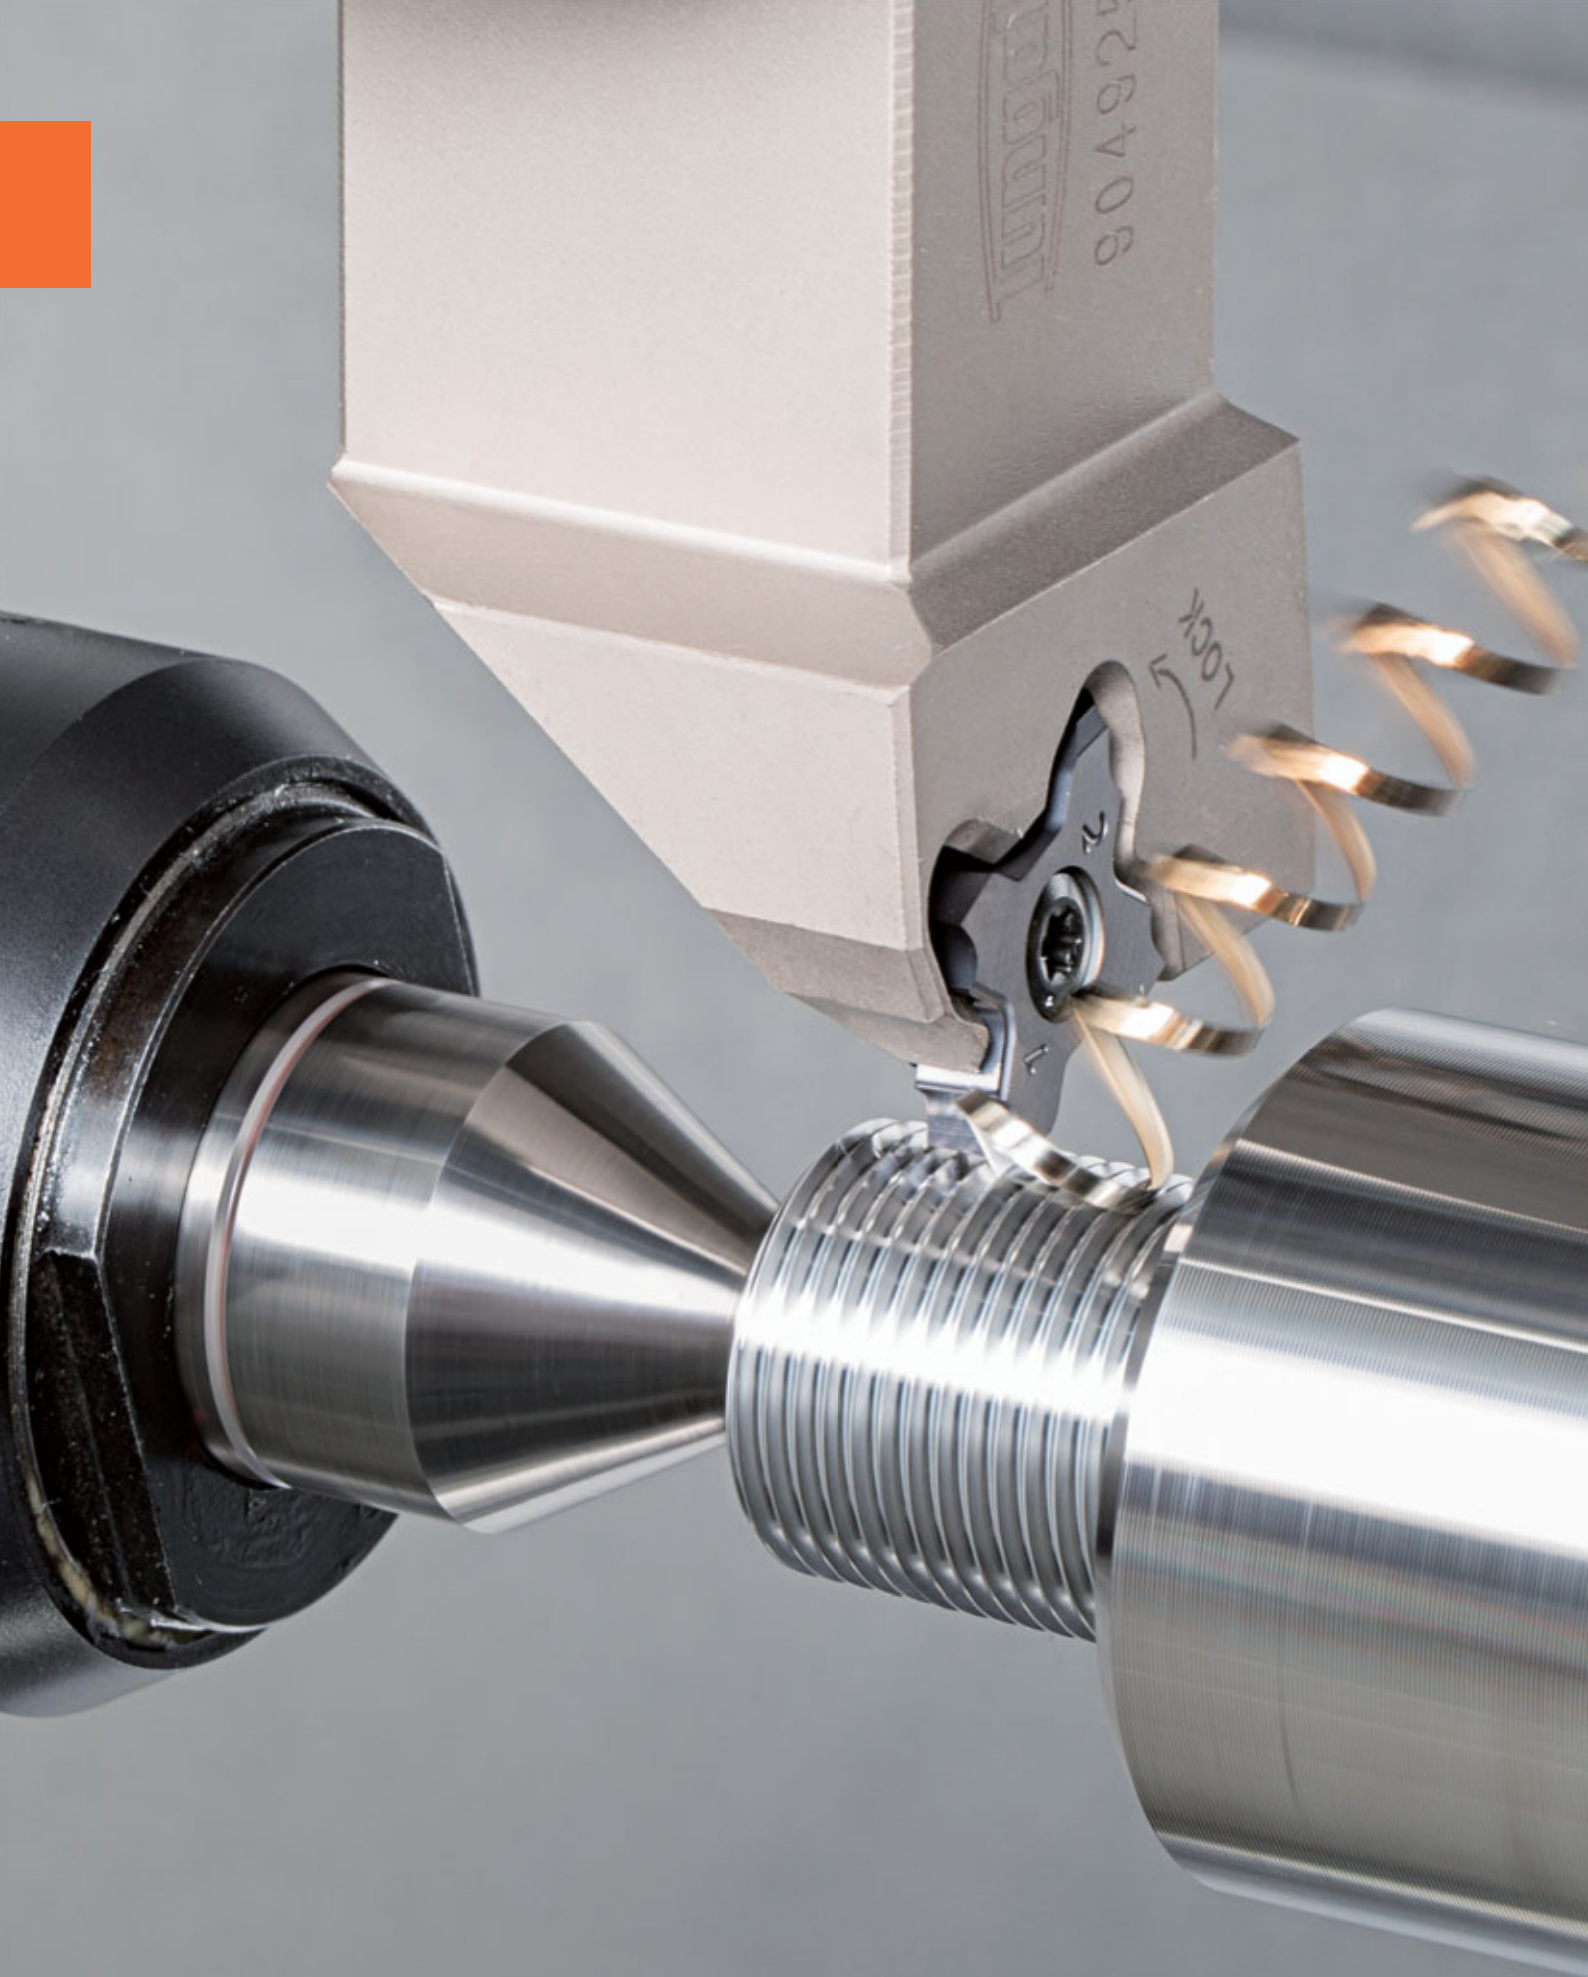

ACCELERATED MACHINING

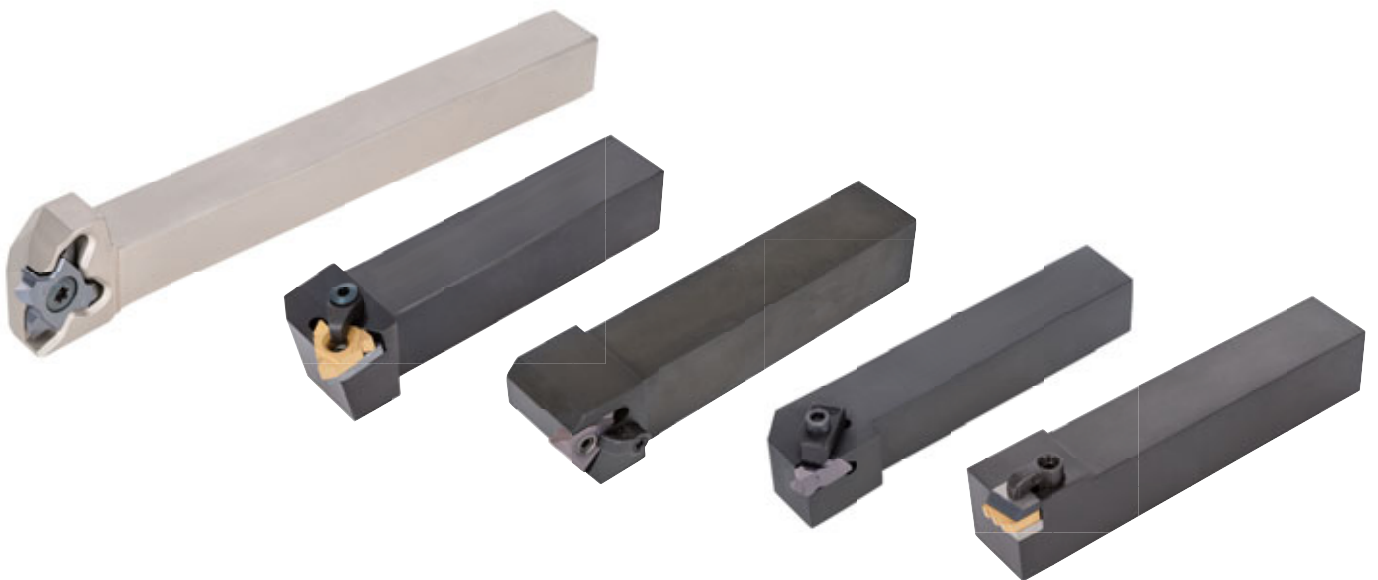

Effective threading tools for CNC lathes,
Swiss-type lathes, and multitasking machines

Lay-down inserts



Offers various types of threading inserts

[p.5](#)

Double clamping method ensures secure insert positioning for threading standard API threads.



TETRAMCUT

[p.50](#)

First-choice threading tool for use in Swiss-type machines, featuring 4 fully edged threading insert. Also suited for threading small diameter parts in standard CNC lathes without interference with the lathe center.



DUOJUST

[p.56](#)

Offers various tools for all threading operations in Swiss-type lathes.



J-SERIES

[p.62](#)

Complementary tool series for threading operations in Swiss-type machines. The insert features 3 cutting edges. Also suited for the use in cam-driven automatic lathes.



TINYMTURN

[p.64](#)

Internal threading tool for diameters as small as $\varnothing 4$ mm. Internal coolant supply with optimized coolant hole position.



TUNG-CLAMP

[p.71](#)

Features highly secure insert clamping mechanism with insert securely locked in position by a clamp. Grooving insert or threading insert fits the same holder.



Tangential inserts

[p.75](#)

Ensures a wider thread pitch application range with less tool investment for ACME and STUB ACME threads. The full profile insert helps attain close thread dimension and eliminates burrs.



Chaser

[p.82](#)

Multiple pointed inserts for efficient threading of API Round and Buttress threads.

Laydown inserts



Expansion **AH8015 grade** for Universal threading

Wide lineup of economical M-class inserts for

B style chipbreaker - first choice for general threading



AH725

PVD-coated grade

16ER***-B
16IR***-B
22ER***-B
22IR***-B

	without chipbreaker	with chipbreaker	
	16ER15ISO	16ER15ISO-B	16ER15ISO-M
Radial infeed			
Flank infeed			

Material : S45C
Screw Size : M24 X 1.5 (external threading)
Cutting speed : Vc = 180 m/min

M style chipbreaker - for better surface finish and fracture resistance




16ER***-M
16IR***-M

NS9530

Provides excellent surface finish quality with advantage in cost per insert

Coating surface smoothness is significantly improved to reduce build-up edge for better surface finish quality and wear resistance

Conventional



NS9530

AH725

PVD-coated grade

Superior fracture resistance with optimized cutting edge preparation

AH8000

PVD-coated grade

PREMIUMTEC

TUNGALOY

Special surface technology

Nano-multi-layered AlTiN coating with high Al content


- Increases hardness by 20%
- Prevents micro cracks from developing


→ Long tool life & stable machining

Improved adhesion strength

→ Prevents notch wear that tends to occur in machining heat-resistant alloys


Newly developed substrates

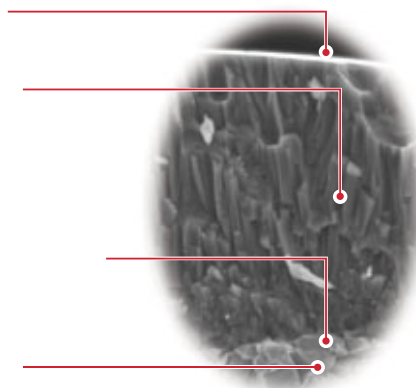

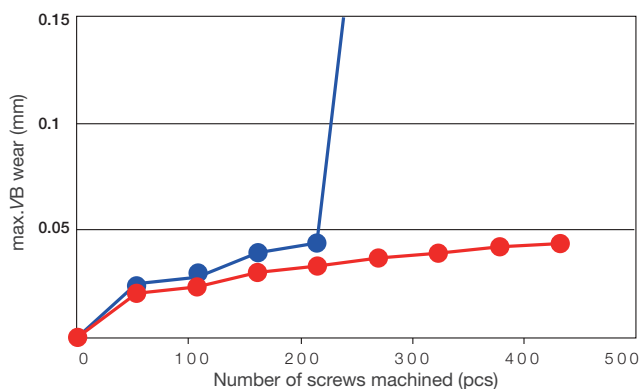
AH8015 / Threading**M**

Insert : 16ER15ISO
 Workpiece material : SUS304
 Cutting speed : $V_c = 100$ m/min
 pitch : 1.5mm
 Machining : External threading
 Infeed method : Radial infeed
 Coolant : Wet

After 432 thread

**AH8015**

After 216 thread




Conventional

ISO	Workpiece materials	Hardness	Cutting speed V_c (m/min)				
			AH725	AH8015	T313V	NS9530	TH10
P	Carbon steel	< 200 HB	80 - 180	80 - 180	100 - 200	150 - 200	-
		> 200 HB	60 - 160	60 - 160	100 - 150	100 - 170	-
M	Stainless steel	-	50 - 130	50 - 130	70 - 130	-	-
K	Cast iron	-	-	-	70 - 150	-	70 - 90
N	Aluminium	-	-	-	-	-	100 - 500
S	Heat-resistance alloys	-	-	-	-	-	10 - 40
H	High hardened steel	50 - 60 HRC	-	-	-	-	10 - 30

INSERT

60° thread angle

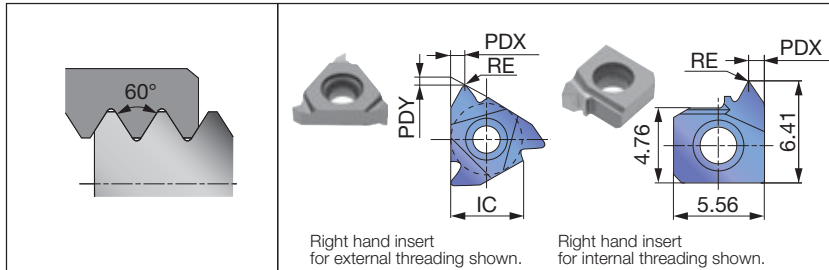

Applicable toolholders

Insert size	External	Internal
6		SNR/L000*K06SC... SNR/L000*H06...
11	SER**11	SNR/L**11...
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...
27	CER/L**27...	CNR/L**27...

Partial-profile inserts

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE
					Coating		Un-coated						Coating		Un-coated				
					AH725	T313V							TH10	AH725					
6	0.5~1.5	48~16	R									6IRA60	●		●	-	0.9	-	0.04
11	0.5~1.5	48~16	R	11ERA60	●			6.35	0.9	0.8	0.06	11IRA60	●	●	●	6.35	0.9	0.7	0.04
11	0.5~1.5	48~16	L									11ILA60	●	●	●	6.35	0.9	0.7	0.04
16	0.5~1.5	48~16	R	16ERA60	●	●	●	9.525	0.9	0.7	0.06	16IRA60	●	●	●	9.525	0.9	0.7	0.04
16	0.5~1.5	48~16	L	16ELA60	●	●	●	9.525	0.9	0.7	0.06	16ILA60	●	●	●	9.525	0.9	0.7	0.04
16	0.5~3	48~8	R	16ERAG60	●	●		9.525	1.6	1.2	0.06	16IRAG60	●	●		9.525	1.6	1.2	0.04
16	1.75~3	14~8	R	16ERG60	●	●	●	9.525	1.6	1.2	0.22	16IRG60	●	●	●	9.525	1.6	1.2	0.12
16	1.75~3	14~8	L	16ELG60	●	●		9.525	1.6	1.2	0.22	16ILG60	●	●	●	9.525	1.6	1.2	0.12
22	3.5~5	7~5	R	22ERN60	●	●	●	12.7	2.5	1.7	0.44	22IRN60	●	●	●	12.7	2.5	1.7	0.25
22	3.5~5	7~5	L	22ELN60	●	●		12.7	2.5	1.7	0.44	22ILN60	●	●		12.7	2.5	1.7	0.25
27	4~6	6~4	R	27ERZ60	●	●		15.875	3.2	2.2	0.5	27IRZ60	●	●		15.875	3.2	2.2	0.28


Partial-profile inserts with chipbreaker

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert								
				Designation	Grades		IC	PDX	PDY	RE	Designation	Grades		IC	PDX	PDY	RE			
					Coating	Cermet						Coating	Cermet							
					AH725	NS9530						AH725	NS9530							
11	0.5~1.5	48~16	R									11IRA60-B	●			6.35	0.9	0.7	0.04	
11	0.5~1.5	48~16	R									11IRA60-M		●			6.35	0.9	0.7	0.04
16	0.5~1.5	48~16	R	16ERA60-B	●*			9.525	0.9	0.8	0.05	16IRA60-B	●*			9.525	0.9	0.8	0.05	
16	0.5~1.5	48~16	R	16ERA60-M		●		9.525	0.9	0.7	0.06	16IRA60-M		●		9.525	0.9	0.7	0.04	
16	0.5~3	48~8	R	16ERAG60-B	●*			9.525	1.7	1.2	0.06	16IRAG60-B	●*			9.525	1.7	1.2	0.05	
16	0.5~3	48~8	R	16ERAG60-M	●	●		9.525	1.6	1.2	0.06	16IRAG60-M	●	●		9.525	1.6	1.2	0.04	
16	1.75~3	14~8	R	16ERG60-B	●*			9.525	1.7	1.2	0.17	16IRG60-B	●*			9.525	1.7	1.2	0.1	
16	1.75~3	14~8	R	16ERG60-M		●		9.525	1.6	1.2	0.22	16IRG60-M		●		9.525	1.6	1.2	0.14	
22	3.5~5	7~5	R	22ERN60-B	●*			12.7	2.5	1.7	0.32	22IRN60-B	●*			12.7	2.5	1.7	0.19	

Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table on Page 21 before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.

may require an alternative shim.


AH725 may require an alternative shim. Please check your insert specification on Page 21.

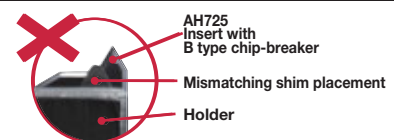

Incorrect insert and shim setting

● : New item
● : Line-up / Packing Quantity = 5 pcs.

55° thread angle

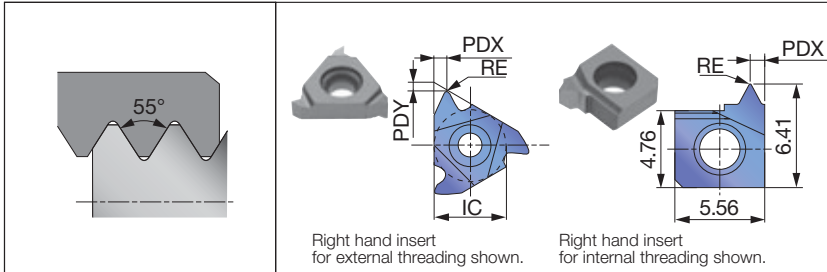

Applicable toolholders

Insert size	External	Internal
6		SNR/L000*K06SC... SNR/L000*H06...
11	SER**11	SNR/L**11...
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...

Partial-profile inserts

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE
					Coating		Un-coated						Coating		Un-coated				
					AH725	T313V	TH10						AH725	T313V	TH10				
6	0.5~1.5	48~16	R									6IRA55	●		●	-	0.9	-	0.07
11	0.5~1.5	48~16	R	11ERA55	●			6.35	0.9	0.8	0.05	11IRA55	●	●	●	6.35	0.9	0.7	0.07
16	0.5~1.5	48~16	R	16ERA55	●	●	●	9.525	0.9	0.7	0.07	16IRA55	●	●	●	9.525	0.9	0.7	0.07
16	0.5~3	48~8	R	16ERAG55	●			9.525	1.7	1.2	0.07	16IRAG55	●			9.525	1.7	1.2	0.07
16	1.75~3	14~8	R	16ERG55	●	●	●	9.525	1.6	1.2	0.25	16IRG55	●	●	●	9.525	1.7	1.2	0.25
22	3.5~5	7~5	R	22ERN55	●	●	●	12.7	2.5	1.7	0.5	22IRN55	●	●	●	12.7	2.5	1.7	0.5


Partial-profile inserts with chipbreaker

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades	IC	PDX	PDY	RE	Designation	Grades	IC	PDX	PDY	RE				
					Coating						Coating								
					AH725						AH725								
16	0.5~3	48~16	R	16ERAG55-B	●*	9.525	1.7	1.2	0.07	16IRAG55-B	●*	9.525	1.7	1.2	0.05				
16	1.75~3	14~8	R	16ERG55-B	●*	9.525	1.7	1.2	0.23	16IRG55-B	●*	9.525	1.7	1.2	0.2				

Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table on Page 21 before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.

may require an alternative shim.


AH725 may require an alternative shim. Please check your insert specification on Page 21.

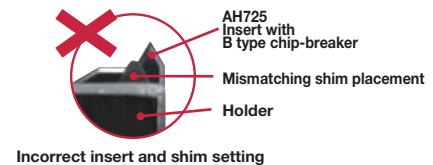

● : New item

● : Line-up / Packing Quantity = 5 pcs.

ISO metric

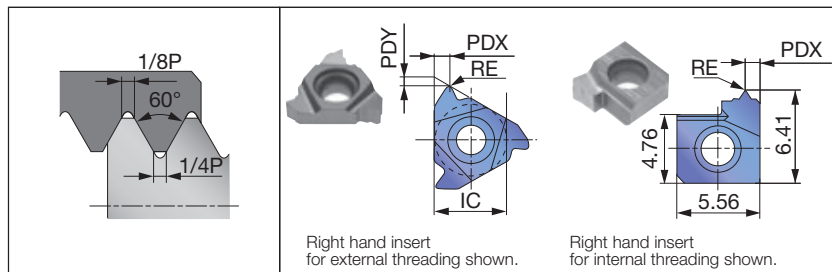

Applicable toolholders

Insert size	External	Internal
6		SNR/L000*K06SC... SNR/L000*H06...
11	SER**11	SNR/L**11...
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...
27	CER/L**27...	CNR/L**27...

Full-profile inserts

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert									
				Designation	Grades				IC	PDX	PDY	RE	Designation	Grades				IC	PDX	PDY	RE
					Coating			Un-coated						Coating			Un-coated				
					AH725	AH8015	T313V							TH10	AH725	AH8015					
6	0.75		R									6IR075ISO	●		●	-	0.5	-	0.05		
6	1		R									6IR10ISO	●		●	-	0.9	-	0.07		
6	1.25		R									6IR125ISO	●		●	-	0.9	-	0.09		
6	1.5		R									6IR15ISO	●		●	-	0.9	-	0.11		
6	1.75		R									6IR175ISO	●		●	-	0.9	-	0.12		
6	2		R									6IR20ISO	●		●	-	0.9	-	0.14		
New	11	0.35	R	11ER035ISO	●				6.35	0.4	0.6	0.04									
New	11	0.5	R	11ER05ISO	●				6.35	0.6	0.6	0.06	11IR05ISO	●		●	6.35	0.5	1.2	0.04	
New	11	0.7	R	11ER07ISO	●				6.35	0.6	0.6	0.11									
New	11	0.75	R	11ER075ISO	●				6.35	0.6	0.6	0.11	11IR075ISO	●			6.35	0.5	1.2	0.05	
New	11	0.8		11ER080ISO	●				6.35	0.6	0.6	0.12									
New	11	1	R	11ER10ISO	●				6.35	0.7	0.7	0.13	11IR10ISO	●		●	6.35	0.9	0.7	0.07	
	11	1	L									11IL10ISO	●			6.35	0.9	0.7	0.07		
New	11	1.25	R	11ER125ISO	●				6.35	0.9	0.8	0.16	11IR125ISO	●			6.35	0.9	0.7	0.09	
	11	1.25	L									11IL125ISO	●			6.35	0.9	0.7	0.09		
New	11	1.5	R	11ER15ISO	●				6.35	0.8	1	0.19	11IR15ISO	●		●	6.35	0.9	0.7	0.11	
	11	1.5	L									11IL15ISO	●			6.35	0.9	0.7	0.11		
	11	1.75	R									11IR175ISO	●		●	6.35	0.9	0.7	0.12		
	11	1.75	L									11IL175ISO	●			6.35	0.9	0.7	0.12		
	11	2	R									11IR20ISO	●		●	6.35	0.9	0.7	0.14		
	11	2	L									11IL20ISO	●			6.35	0.9	0.7	0.14		
	16	0.5	R	16ER05ISO	●			●	9.525	0.5	1.2	0.06	16IR05ISO	●			9.525	0.5	1.2	0.04	
	16	0.75	R	16ER075ISO	●		●	●	9.525	0.5	1.2	0.09	16IR075ISO	●			9.525	0.5	1.2	0.05	
	16	1	R	16ER10ISO	●		●	●	9.525	0.9	0.7	0.13	16IR10ISO	●		●	9.525	0.9	0.7	0.07	
	16	1	L	16EL10ISO					9.525	0.9	0.7	0.13	16IL10ISO	●			9.525	0.9	0.7	0.07	
	16	1.25	R	16ER125ISO	●		●		9.525	0.9	0.7	0.16	16IR125ISO	●			9.525	0.9	0.7	0.09	
	16	1.25	L	16EL125ISO					9.525	0.9	0.7	0.16	16IL125ISO	●			9.525	0.9	0.7	0.09	
	16	1.5	R	16ER15ISO	●		●	●	9.525	0.9	0.7	0.19	16IR15ISO	●		●	9.525	0.9	0.7	0.11	
	16	1.5	L	16EL15ISO					9.525	0.9	0.7	0.19	16IL15ISO	●			9.525	0.9	0.7	0.11	
	16	1.75	R	16ER175ISO	●		●		9.525	1.6	1.2	0.22	16IR175ISO	●		●	9.525	1.6	1.2	0.12	
	16	2	R	16ER20ISO	●	●	●	●	9.525	1.6	1.2	0.25	16IR20ISO	●		●	9.525	1.6	1.2	0.14	

● : New item

● : Line-up / Packing Quantity = 5 pcs.

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE
					Coating		Uncoated						Coating		Uncoated				
					AH725	T313V							TH10	AH725					
16	2	L	16EL20ISO	●			9.525	1.6	1.2	0.25	16IL20ISO	●			9.525	1.6	1.2	0.14	
16	2.5	R	16ER25ISO	●	●	●	9.525	1.6	1.2	0.31	16IR25ISO	●	●	●	9.525	1.6	1.2	0.18	
16	3	R	16ER30ISO	●	●	●	9.525	1.6	1.2	0.38	16IR30ISO	●	●	●	9.525	1.6	1.2	0.21	
16	3	L	16EL30ISO				9.525	1.6	1.2	0.38	16IL30ISO	●			9.525	1.6	1.2	0.21	
22	3.5	R	22ER35ISO	●	●		12.7	2.5	1.7	0.44	22IR35ISO	●	●		12.7	2.5	1.7	0.25	
22	4	R	22ER40ISO	●	●		12.7	2.5	1.7	0.5	22IR40ISO	●	●		12.7	2.5	1.7	0.28	
22	4.5	R	22ER45ISO	●			12.7	2.5	1.7	0.56	22IR45ISO	●			12.7	2.5	1.7	0.32	
22	5	R	22ER50ISO	●	●		12.7	2.5	1.7	0.63	22IR50ISO	●	●		12.7	2.5	1.7	0.35	
27	6	R	27ER60ISO	●	●		15.875	3.2	2.2	0.75	27IR60ISO	●	●		15.875	3.2	2.2	0.42	

Full-profile inserts with chipbreaker

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE
					Coating		Cermet						Coating		Cermet				
					AH725	AH8015							NS9530	AH725					
11	0.5		R									11IR05ISO-B	●			6.35	0.5	1.2	0.04
11	0.5		R									11IR05ISO-M		●		6.35	0.5	1.2	0.04
11	0.75		R									11IR075ISO-B	●			6.35	0.5	1.2	0.05
11	0.75		R									11IR075ISO-M		●		6.35	0.5	1.2	0.05
11	1		R									11IR10ISO-B	●			6.35	0.9	0.7	0.08
11	1		R									11IR10ISO-M		●		6.35	0.9	0.7	0.08
11	1.25		R									11IR125ISO-B	●			6.35	0.9	0.7	0.1
11	1.25		R									11IR125ISO-M		●		6.35	0.9	0.7	0.1
11	1.5		R									11IR15ISO-B	●			6.35	0.9	0.7	0.12
11	1.5		R									11IR15ISO-M		●		6.35	0.9	0.7	0.12
11	1.75		R									11IR175ISO-B	●			6.35	0.9	0.7	0.12
11	1.75		R									11IR175ISO-M		●		6.35	0.9	0.7	0.12
11	2		R									11IR20ISO-B	●			6.35	0.9	0.7	0.14
11	2		R									11IR20ISO-M		●		6.35	0.9	0.7	0.14
16	0.5		R	16ER05ISO-M			●	9.525	0.5	1.2	0.06								
16	0.75		R	16ER075ISO-B	●*			9.525	0.6	0.6	0.08								
16	0.75		R	16ER075ISO-M			●	9.525	0.5	1.2	0.09								
16	1		R	16ER10ISO-B	●*			9.525	0.7	0.7	0.11	16IR10ISO-B	●*			9.525	0.7	0.6	0.05
16	1		R	16ER10ISO-M	●		●	9.525	0.9	0.7	0.13	16IR10ISO-M		●	●	9.525	0.9	0.7	0.08
16	1.25		R	16ER125ISO-B	●*			9.525	0.9	0.8	0.14	16IR125ISO-B	●*			9.525	0.9	0.8	0.07
16	1.25		R	16ER125ISO-M		●	●	9.525	0.9	0.7	0.16	16IR125ISO-M		●		9.525	0.9	0.7	0.1
16	1.5		R	16ER15ISO-B	●*			9.525	1	0.8	0.19	16IR15ISO-B	●*			9.525	1	0.8	0.08
16	1.5		R	16ER15ISO-M	●	●	●	9.525	0.9	0.7	0.19	16IR15ISO-M	●	●	●	9.525	0.9	0.7	0.12
16	1.75		R	16ER175ISO-B	●*			9.525	1.2	0.9	0.2	16IR175ISO-B	●*			9.525	1.2	0.9	0.10
16	1.75		R	16ER175ISO-M			●	9.525	1.6	1.2	0.22	16IR175ISO-M			●	9.525	1.6	1.2	0.14
16	2		R	16ER20ISO-B	●*			9.525	1.3	1	0.24	16IR20ISO-B	●*			9.525	1.3	1	0.11
16	2		R	16ER20ISO-M	●		●	9.525	1.6	1.2	0.25	16IR20ISO-M			●	9.525	1.6	1.2	0.14
16	2.5		R	16ER25ISO-B	●*			9.525	1.5	1.1	0.3	16IR25ISO-B	●*			9.525	1.5	1.1	0.14
16	2.5		R	16ER25ISO-M			●	9.525	1.6	1.2	0.31	16IR25ISO-M			●	9.525	1.6	1.2	0.18
16	3		R	16ER30ISO-B	●*			9.525	1.6	1.2	0.38	16IR30ISO-B	●*			9.525	1.5	1.1	0.18
16	3		R	16ER30ISO-M			●	9.525	1.6	1.2	0.38	16IR30ISO-M			●	9.525	1.6	1.2	0.21
22	3.5		R	22ER35ISO-B	●*			12.7	2.3	1.6	0.48								
22	4		R	22ER40ISO-B	●*			12.7	2.3	1.6	0.52								


Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table on Page 21 before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.

may require an alternative shim.

AH725 may require an alternative shim. Please check your insert specification on Page 21.

● : Line-up / Packing Quantity = 5 pcs.

Unified

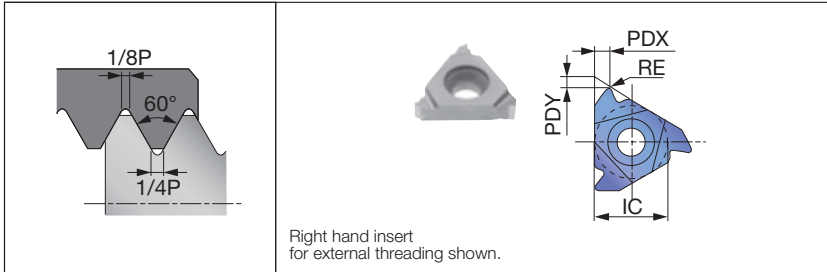

Applicable toolholders

Insert size	External	Internal
11		SNR/L**11...
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert							Internal insert						
				Designation	Grades		IC	PDX	PDY	RE	Designation	Grades		IC	PDX	PDY	RE
					Coating							Coating					
					AH725	T313V						AH725	T313V				
11 (0.794)	32	R								11IR32UN	●	6.35	0.5	1.2	0.06		
11 (0.907)	28	R								11IR28UN	●	6.35	0.5	1.2	0.06		
11 (1.058)	24	R								11IR24UN	●	6.35	0.9	0.7	0.07		
11 (1.27)	20	R								11IR20UN	●	6.35	0.9	0.7	0.09		
11 (1.411)	18	R								11IR18UN	●	6.35	0.9	0.7	0.1		
11 (1.588)	16	R								11IR16UN	●	6.35	0.9	0.7	0.11		
11 (1.814)	14	R								11IR14UN	●	6.35	0.9	0.7	0.13		
16 (0.794)	32	R	16ER32UN	●	9.525	0.5	1.2	0.1	16IR32UN	●	9.525	0.5	1.2	0.06			
16 (0.907)	28	R	16ER28UN	●	9.525	0.5	1.2	0.11	16IR28UN	●	9.525	0.5	1.2	0.06			
16 (1.058)	24	R	16ER24UN	●	9.525	0.9	0.7	0.13	16IR24UN	●	9.525	0.9	0.7	0.07			
16 (1.27)	20	R	16ER20UN	●	9.525	0.9	0.7	0.16	16IR20UN	●	9.525	0.9	0.7	0.09			
16 (1.411)	18	R	16ER18UN	●	9.525	0.9	0.7	0.18	16IR18UN	●	9.525	0.9	0.7	0.1			
16 (1.588)	16	R	16ER16UN	●	●	9.525	0.9	0.7	0.2	16IR16UN	●	●	9.525	0.9	0.7	0.11	
16 (1.814)	14	R	16ER14UN	●	●	9.525	1.6	1.2	0.23	16IR14UN	●	●	9.525	1.6	1.2	0.13	
16 (1.954)	13	R	16ER13UN	●	9.525	1.6	1.2	0.24	16IR13UN	●	9.525	1.6	1.2	0.14			
16 (2.117)	12	R	16ER12UN	●	●	9.525	1.6	1.2	0.27	16IR12UN	●	●	9.525	1.6	1.2	0.15	
16 (2.309)	11	R	16ER11UN	●	9.525	1.6	1.2	0.29	16IR11UN	●	9.525	1.6	1.2	0.16			
16 (2.54)	10	R	16ER10UN	●	9.525	1.6	1.2	0.32	16IR10UN	●	9.525	1.6	1.2	0.18			
16 (2.822)	9	R	16ER9UN	●	9.525	1.6	1.2	0.35	16IR9UN	●	9.525	1.6	1.2	0.2			
16 (3.175)	8	R	16ER8UN	●	●	9.525	1.6	1.2	0.4	16IR8UN	●	●	9.525	1.6	1.2	0.22	
22 (3.629)	7	R	22ER7UN	●	12.7	2.5	1.7	0.45	22IR7UN	●	12.7	2.5	1.7	0.25			
22 (4.233)	6	R	22ER6UN	●	12.7	2.5	1.7	0.53	22IR6UN	●	12.7	2.5	1.7	0.3			
22 (5.08)	5	R	22ER5UN	●	12.7	2.5	1.7	0.64	22IR5UN	●	12.7	2.5	1.7	0.36			

● : Line-up / Packing Quantity = 5 pcs.


Full-profile inserts with chipbreaker

Insert size	Pitch	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades		IC	PDX	PDY	RE		Designation	Grades		IC	PDX	PDY	RE	
					Coating	Cermet							Coating	Cermet					
					AH725	NS9530							AH725	NS9530					
16 (1.058)	24	R		16ER24UN-B	●*		9.525	0.8	0.7	0.11									
16 (1.058)	24	R		16ER24UN-M		●	9.525	0.9	0.7	0.13									
16 (1.27)	20	R		16ER20UN-B	●*		9.525	0.9	0.8	0.14		16IR20UN-B	●*		9.525	0.9	0.8	0.06	
16 (1.27)	20	R		16ER20UN-M		●	9.525	0.9	0.7	0.16		16IR20UN-M		●	9.525	0.9	0.7	0.09	
16 (1.411)	18	R		16ER18UN-B	●*		9.525	1	0.8	0.15		16IR18UN-B	●*		9.525	1	0.8	0.08	
16 (1.411)	18	R		16ER18UN-M		●	9.525	0.9	0.7	0.18		16IR18UN-M		●	9.525	0.9	0.7	0.1	
16 (1.588)	16	R		16ER16UN-B	●*		9.525	1.1	0.9	0.19		16IR16UN-B	●*		9.525	1.1	0.9	0.09	
16 (1.588)	16	R		16ER16UN-M		●	9.525	0.9	0.7	0.2		16IR16UN-M		●	9.525	0.9	0.7	0.11	
16 (1.814)	14	R		16ER14UN-B	●*		9.525	1.2	1	0.22		16IR14UN-B	●*		9.525	1.2	0.9	0.11	
16 (1.814)	14	R		16ER14UN-M		●	9.525	1.6	1.2	0.23		16IR14UN-M		●	9.525	1.6	1.2	0.13	
16 (1.954)	13	R		16ER13UN-B	●*		9.525	1.3	1	0.24									
16 (2.117)	12	R		16ER12UN-B	●*		9.525	1.4	1.1	0.25		16IR12UN-B	●*		9.525	1.4	1.1	0.12	
16 (2.117)	12	R		16ER12UN-M		●	9.525	1.6	1.2	0.27		16IR12UN-M		●	9.525	1.6	1.2	0.15	
16 (3.175)	8	R		16ER8UN-B	●*		9.525	1.6	1.2	0.41		16IR8UN-B	●*		9.525	1.5	1.1	0.19	
16 (3.175)	8	R		16ER8UN-M		●	9.525	1.6	1.2	0.4		16IR8UN-M		●	9.525	1.6	1.2	0.22	

Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table on Page 21 before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.


may require an alternative shim.

AH725 may require an alternative shim. Please check your insert specification on Page 21.



Incorrect insert and shim setting

Whitworth

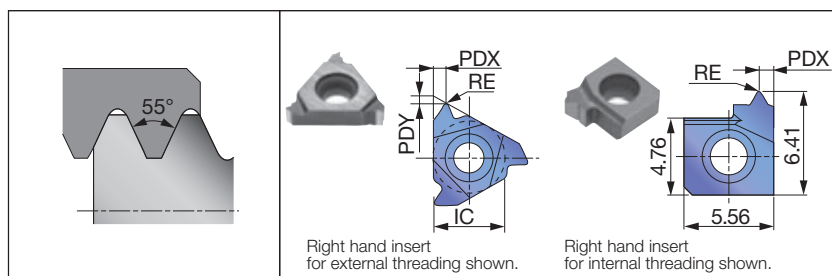

Applicable toolholders

Insert size	External	Internal
6		SNR/L000*K06SC... SNR/L000*H06...
11		SNR/L**11...
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE
					Coating		Un-coated						Coating		Un-coated				
					AH725	T313V							TH10	AH725					
6	(1.337)	19	R									61R19W	●		●	-	0.9	-	0.17
11	(1.337)	19	R									111R19W	●	●	●	6.35	0.9	0.7	0.17
11	(1.814)	14	R									111R14W	●	●	●	6.35	0.9	0.7	0.23
16	(0.907)	28	R	16ER28W	●	●		9.525	0.9	0.7	0.11	161R28W	●			9.525	0.9	0.7	0.11
16	(0.97)	26	R	16ER26W	●			9.525	0.9	0.7	0.12	161R26W	●			9.525	0.9	0.7	0.12
16	(1.27)	20	R	16ER20W	●			9.525	0.9	0.7	0.16	161R20W	●			9.525	0.9	0.7	0.16
16	(1.337)	19	R	16ER19W	●	●		9.525	0.9	0.7	0.17	161R19W	●			9.525	0.9	0.7	0.17
16	(1.411)	18	R	16ER18W	●			9.525	0.9	0.7	0.18	161R18W	●			9.525	0.9	0.7	0.18
16	(1.588)	16	R	16ER16W	●	●		9.525	0.9	0.7	0.2	161R16W	●	●		9.525	0.9	0.7	0.2
16	(1.814)	14	R	16ER14W	●	●	●	9.525	1.6	1.2	0.23	161R14W	●	●	●	9.525	1.6	1.2	0.23
16	(1.814)	14	L	16EL14W	●			9.525	1.6	1.2	0.23								
16	(2.117)	12	R	16ER12W	●	●		9.525	1.6	1.2	0.27	161R12W	●	●		9.525	1.6	1.2	0.27
16	(2.309)	11	R	16ER11W	●	●	●	9.525	1.6	1.2	0.29	161R11W	●	●	●	9.525	1.6	1.2	0.29
16	(2.54)	10	R	16ER10W	●	●		9.525	1.6	1.2	0.32	161R10W	●	●		9.525	1.6	1.2	0.32
16	(2.822)	9	R	16ER9W	●			9.525	1.6	1.2	0.35	161R9W	●			9.525	1.6	1.2	0.35
16	(3.175)	8	R	16ER8W	●	●		9.525	1.6	1.2	0.4	161R8W	●	●		9.525	1.6	1.2	0.4
22	(3.629)	7	R	22ER7W	●			12.7	2.5	1.7	0.45	221R7W	●			12.7	2.5	1.7	0.45
22	(4.233)	6	R	22ER6W	●			12.7	2.5	1.7	0.53	221R6W	●			12.7	2.5	1.7	0.53
22	(5.08)	5	R	22ER5W	●			12.7	2.5	1.7	0.64	221R5W	●			12.7	2.5	1.7	0.64

Full-profile inserts with chipbreaker

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE
					Coating		Cermet						Coating		Cermet				
					AH725	AH8015	NS9530						AH725	AH8015	NS9530				
16 (1.337)	19	R	16ER19W-B	●*			9.525	1	0.8	0.16									
16 (1.337)	19	R	16ER19W-M		●		9.525	0.9	0.7	0.17	16IR19W-M		●		9.525	0.9	0.7	0.17	
16 (1.588)	16	R	16ER16W-B	●*			9.525	1.1	0.9	0.2	16IR16W-B	●*			9.525	1.1	0.9	0.18	
16 (1.814)	14	R	16ER14W-B	●*			9.525	1.2	1	0.24	16IR14W-B	●*			9.525	1.2	1	0.21	
16 (1.814)	14	R	16ER14W-M		●		9.525	1.6	1.2	0.23	16IR14W-M		●	●	9.525	1.6	1.2	0.23	
16 (2.309)	11	R	16ER11W-B	●*			9.525	1.5	1.1	0.27	16IR11W-B	●*			9.525	1.5	1.1	0.27	
16 (2.309)	11	R	16ER11W-M		●		9.525	1.6	1.2	0.29	16IR11W-M		●		9.525	1.6	1.2	0.29	


Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table on Page 21 before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.

may require an alternative shim.

AH725 may require an alternative shim. Please check your insert specification on Page 21.

● : Line-up / Packing Quantity = 5 pcs.

Taper pipe (BSPT)

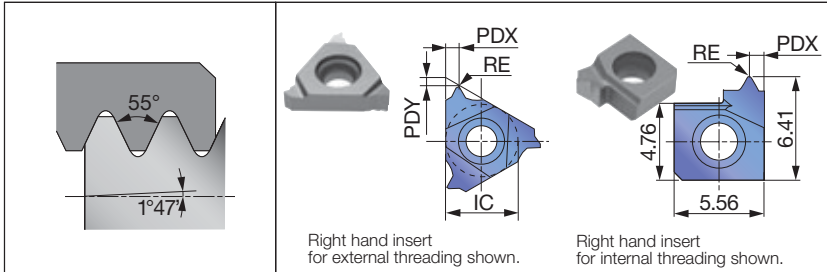

Applicable toolholders

Insert size	External	Internal
6		SNR/L000*K06SC... SNR/L000*H06...
11		SNR/L**11...
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert								Internal insert								
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE	
					Coating		Un-coated						Coating		Un-coated					
					AH725	T313V							TH10	AH725						T313V
6	(1.337)	19	R									6IR19PT	●		●	-	0.9	-	0.14	
11	(1.337)	19	R									11IR19PT	●		●	6.35	0.9	0.7	0.14	
11	(1.814)	14	R									11IR14PT	●		●	6.35	0.9	0.7	0.16	
16	(0.907)	28	R	16ER28PT	●		●		9.525	0.9	0.7	0.09								
16	(1.337)	19	R	16ER19PT	●		●		9.525	0.9	0.7	0.14	16IR19PT	●			9.525	0.9	0.7	0.14
16	(1.814)	14	R	16ER14PT	●		●		9.525	1.6	1.2	0.16	16IR14PT	●		●	9.525	1.6	1.2	0.16
16	(2.309)	11	R	16ER11PT	●		●		9.525	1.6	1.2	0.26	16IR11PT	●		●	9.525	1.6	1.2	0.26


Full-profile inserts with chipbreaker

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades		IC	PDX	PDY	RE	Designation	Grades		IC	PDX	PDY	RE		
					Coating	Cermet						Coating	Cermet						
					AH725	NS9530						AH725	NS9530						
16 (1.337)	19	R	16ER19PT-M		●	9.525	0.9	0.7	0.18	16IR19PT-M		●	9.525	0.9	0.7	0.18			
16 (1.814)	14	R	16ER14PT-B		●*	9.525	1.2	1	0.21	16IR14PT-B		●*	9.525	1	1.2	0.21			
16 (1.814)	14	R	16ER14PT-M		●	9.525	1.6	1.2	0.25	16IR14PT-M		●	9.525	1.6	1.2	0.25			
16 (2.309)	11	R	16ER11PT-B		●*	9.525	1.5	1.1	0.28	16IR11PT-B		●*	9.525	1.5	1.1	0.28			
16 (2.309)	11	R	16ER11PT-M		●	9.525	1.6	1.2	0.32	16IR11PT-M		●	9.525	1.6	1.2	0.32			

Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table on Page 21 before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.


may require an alternative shim.

AH725 may require an alternative shim. Please check your insert specification on Page 21.

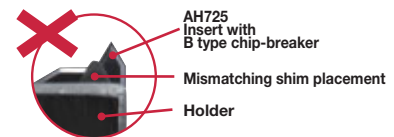

Incorrect insert and shim setting

NPT

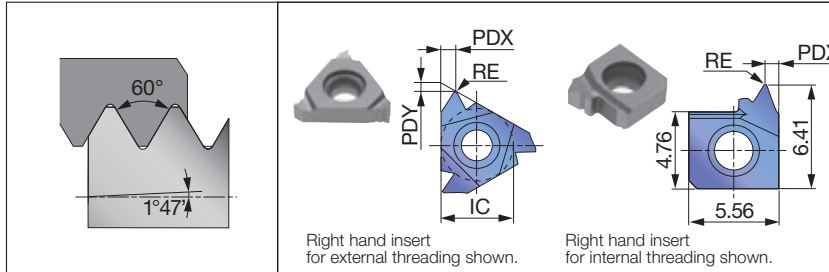

Applicable toolholders

Insert size	External	Internal
6		SNR/L000*K06SC... SNR/L000*H06...
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades			IC	PDX	PDY	RE	Designation	Grades			IC	PDX	PDY	RE
					Coating		Un-coated						Coating		Un-coated				
					AH725	T313V							TH10	AH725					
6	(1.411)	18	R									6IR18NPT	●		●	-	0.9	-	0.03
16	(0.941)	27	R	16ER27NPT	●			9.525	0.5	1.2	0.02	16IR27NPT	●			9.525	0.5	1.2	0.02
16	(1.411)	18	R	16ER18NPT	●	●		9.525	0.9	0.7	0.03	16IR18NPT	●			9.525	0.9	0.7	0.03
16	(1.814)	14	R	16ER14NPT	●			9.525	1.6	1.2	0.04	16IR14NPT	●		●	9.525	1.6	1.2	0.04
16	(2.209)	11.5	R	16ER115NPT	●			9.525	1.6	1.2	0.05	16IR115NPT	●		●	9.525	1.6	1.2	0.05
16	(3.175)	8	R	16ER8NPT	●			9.525	1.6	1.2	0.07	16IR8NPT	●		●	9.525	1.6	1.2	0.07


Full-profile inserts with chipbreaker

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert								Internal insert							
				Designation	Grades		IC	PDX	PDY	RE	Designation	Grades		IC	PDX	PDY	RE		
					Coating	Cermet						Coating	Cermet						
					AH725	NS9530						AH725	NS9530						
16 (1.411)	18	R	16ER18NPT-B	●*		9.525	1	0.8	0.05										
16 (1.411)	18	R	16ER18NPT-M		●	9.525	0.9	0.7	0.07	16IR18NPT-M		●	9.525	0.9	0.7	0.07			
16 (1.814)	14	R	16ER14NPT-B	●*		9.525	1.2	0.9	0.05	16IR14NPT-B	●*		9.525	1.2	0.9	0.05			
16 (1.814)	14	R	16ER14NPT-M		●	9.525	1.6	1.2	0.08	16IR14NPT-M		●	9.525	1.6	1.2	0.08			
16 (2.209)	11.5	R	16ER115NPT-B	●*		9.525	1.5	1.1	0.09	16IR115NPT-B	●*		9.525	1.5	1.1	0.09			
16 (2.209)	11.5	R	16ER115NPT-M		●	9.525	1.6	1.2	0.09	16IR115NPT-M		●	9.525	1.6	1.2	0.09			
16 (3.175)	8	R	16ER8NPT-B	●*		9.525	1.8	1.3	0.12	16IR8NPT-B	●*		9.525	1.8	1.3	0.12			


Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table on Page 21 before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.

may require an alternative shim.

AH725 may require an alternative shim. Please check your insert specification on Page 21.

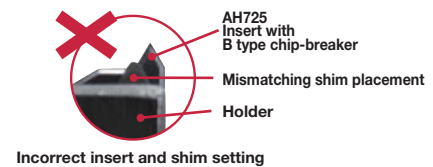

NPTF

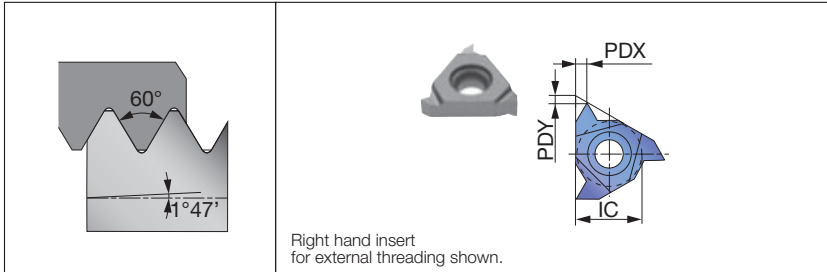


Applicable toolholders

Insert size	External	Internal
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert							Internal insert						
				Designation	Grades	IC	PDX	PDY	RE	Designation	Grades	IC	PDX	PDY	RE		
					Coating						Coating						
					AH725						AH725						
16 (0.941)	27	R		16ER27NPTF	●	9.525	0.5	1.2	-								
16 (1.411)	18	R		16ER18NPTF	●	9.525	0.9	0.7	-								
16 (1.814)	14	R		16ER14NPTF	●	9.525	1.6	1.2	-	16IR14NPTF	●	9.525	1.6	1.2	-		
16 (2.209)	11.5	R		16ER115NPTF	●	9.525	1.6	1.2	-	16IR115NPTF	●	9.525	1.6	1.2	-		
16 (3.175)	8	R		16ER8NPTF	●	9.525	1.6	1.2	-	16IR8NPTF	●	9.525	1.6	1.2	-		

MJ

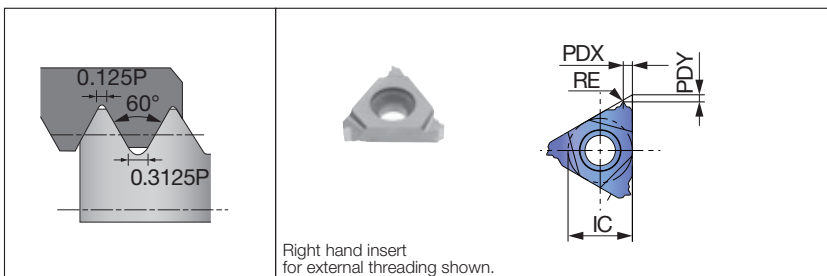


Applicable toolholders

Insert size	External	Internal
11		SNR**11...

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert					
				Designation	Grades	IC	PDX	PDY	RE
					Coating				
					AH8015				
11	1	R	11IR10MJ	●	6.35	0.9	0.7	0.05	

30° Trapezoidal (DIN103)

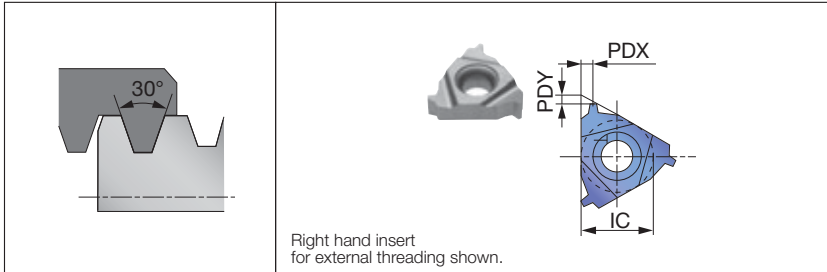


Applicable toolholders

Insert size	External	Internal
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...
27	CER/L**27...	CNR/L**27...

Insert size	Pitch	TPI	Hand of cut	External insert					Internal insert						
				Designation	Grades		IC	PDX	PDY	Designation	Grades		IC	PDX	PDY
					Coating						Coating				
					AH725	T313V					AH725	T313V			
16	1.5	R	16ER15TR	●		9.525	0.9	0.7	16IR15TR	●		9.525	0.9	0.7	
16	2	R	16ER20TR	●	●	9.525	1.6	1.3	16IR20TR	●	●	9.525	1.6	1.3	
16	3	R	16ER30TR	●	●	9.525	1.6	1.3	16IR30TR	●	●	9.525	1.6	1.3	
22	4	R	22ER40TR	●	●	12.7	2.5	2	22IR40TR	●	●	12.7	2.5	2	
22	5	R	22ER50TR	●	●	12.7	2.5	2	22IR50TR	●	●	12.7	2.5	2	
27	6	R	27ER60TR	●	●	15.875	3.2	2.5							

29° Trapezoidal (ACME)

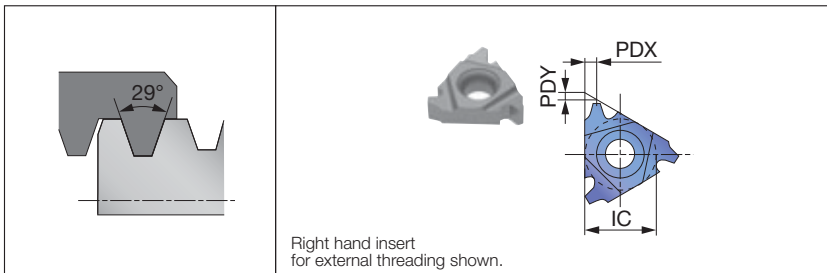


Applicable toolholders

Insert size	External	Internal
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert					Internal insert						
				Designation	Grades		IC	PDX	PDY	Designation	Grades		IC	PDX	PDY
					Coating						Coating				
					AH725	T313V					AH725	T313V			
16 (2.117)	12	R	16ER12ACME	●		9.525	1.6	1.3	16IR12ACME	●		9.525	1.6	1.3	
16 (2.540)	10	R	16ER10ACME	●		9.525	1.6	1.3	16IR10ACME	●		9.525	1.6	1.3	
16 (3.175)	8	R	16ER8ACME	●	●	9.525	1.6	1.3	16IR8ACME	●	●	9.525	1.6	1.3	
22 (4.233)	6	R	22ER6ACME	●	●	12.7	2.5	2	22IR6ACME	●	●	12.7	2.5	2	
22 (5.080)	5	R	22ER5ACME	●	●	12.7	2.5	2	22IR5ACME	●	●	12.7	2.5	2	

API Round

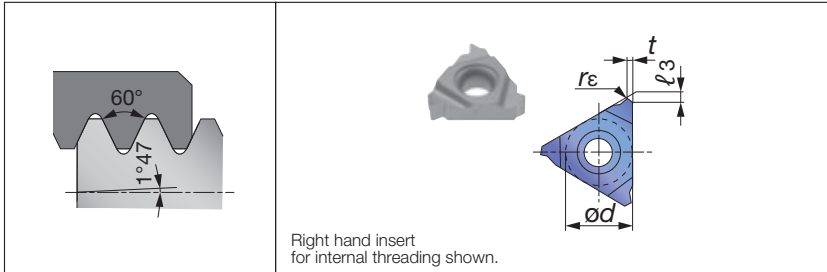

Applicable toolholders

Insert size	External	Internal
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...


Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert							Internal insert						
				Designation	Grades		IC	PDX	PDY	RE	Designation	Grades		IC	PDX	PDY	RE
					Coating							Coating					
					AH725	T313V						AH725	T313V				
16 (2.54)	10	R	16ER10RAPI	●		9.525	1.6	1.2	0.36	16IR10RAPI	●	●	9.525	1.6	1.2	0.36	
16 (3.175)	8	R	16ER8RAPI	●		9.525	1.6	1.2	0.43	16IR8RAPI	●	●	9.525	1.6	1.2	0.43	
22 (3.175)	8	R								22IR8RAPI-2T	●		12.7	4.5	3	0.43	

Full-profile inserts with chipbreaker

Insert size	Pitch (Reference)	Number of threads	Hand of cut	External insert							Internal insert						
				Designation	Grades	IC	PDX	PDY	RE	Designation	Grades	IC	PDX	PDY	RE		
					Coating						Coating						
					AH725						AH725						
16	(2.54)	10	R	16ER10RD-CB	●	9.525	1.2	1.5	0.36	16IR10RD-CB	●	9.525	1.2	1.5	0.36		
16	(3.175)	8	R	16ER8RD-CB	●	9.525	1.3	1.5	0.43	16IR8RD-CB	●	9.525	1.3	1.5	0.43		

API Buttress

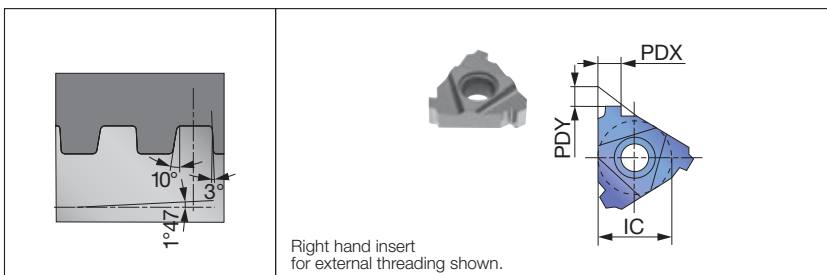


Applicable toolholders

Insert size	External	Internal
22	CER/L**22...	TSNR/L**22 SNR/L**22... TCNR/L**22... CNR/L**22...

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert						Internal insert					
				Designation	Grades	IC	PDX	PDY	Designation	Grades	IC	PDX	PDY		
					Coating					Coating					
					AH725					AH725					
22	(5.08)	5	R	22ER5BAPI	●	12.7	3.72	2.2	22IR5BAPI	●	12.7	3.45	2.2		

Round (DIN405)

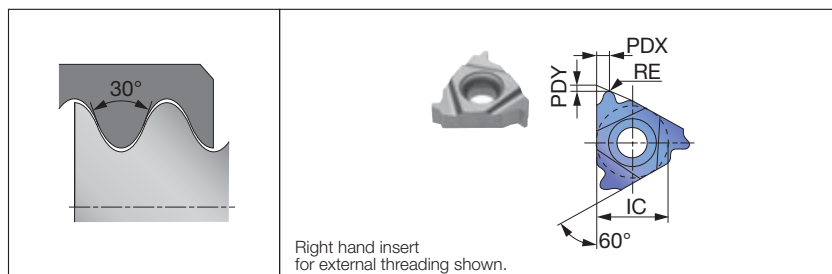


Applicable toolholders

Insert size	External	Internal
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16	TSNR/L**16 SNR/L**16... TCNR/L**16... CNR/L**16...

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert							Internal insert						
				Designation	Grades	IC	PDX	PDY	RE	Designation	Grades	IC	PDX	PDY	RE		
					Coating						Coating						
					AH725						AH725						
16	8	R	16ER8RD-B	●	9.525	1.3	1.4	-									
16	6	R	16ER6RD-B	●	9.525	1.7	1.5	-	16IR6RD-B	●	9.525	1.5	1.4	-			

UNJ (Aerospace)

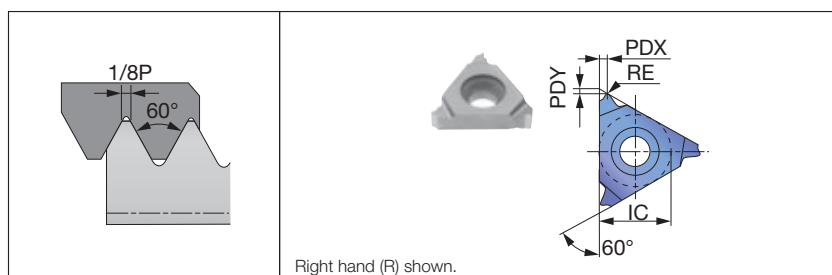

Applicable toolholders


Insert size	External
16	CER/L**16... B-SER/L**16 B-CER/L**16 BC-SER/L**16

Full-profile inserts

Insert size	Pitch (Reference)	TPI	Hand of cut	External insert				
				Designation	Grades	IC	PDX	PDY
					Coating			
					AH725			
16	32	R		16ER32UNJ	●	9.525	0.5	1.2
16	28	R		16ER28UNJ	●	9.525	0.5	1.2
16	24	R		16ER24UNJ	●	9.525	0.9	0.7
16	20	R		16ER20UNJ	●	9.525	0.9	0.7
16	18	R		16ER18UNJ	●	9.525	0.9	0.7
16	16	R		16ER16UNJ	●	9.525	0.9	0.7
16	14	R		16ER14UNJ	●	9.525	1.6	1.2
16	12	R		16ER12UNJ	●	9.525	1.6	1.2
16	10	R		16ER10UNJ	●	9.525	1.6	1.2
16	8	R		16ER8UNJ	●	9.525	1.6	1.2

IMPORTANT NOTICE - Replacement of shim sheet

Note: ●* There are two different types of shims for AH725 inserts dependent on the chipbreaker used. Always choose the correct shim from the table below before use. If a mismatched shim is used for an AH725 insert, proper insert support is not provided, resulting in unsuccessful tool performance and short tool life.

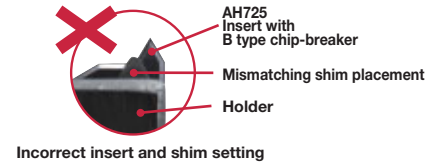

List of interchangeable Shims (Size 16 · Insert).

Holder type	Lead Angle	External designation		Internal designation	
		① Conventional	① Standard (New)	② Conventional	② Standard (New)
Dual clamping methods of screw-on and clamp-on	4°	GXE16-4DT	AE16-4DT	GXN16-4DT	AN16-4DT
	3°	GXE16-3DT	AE16-3DT	GXN16-3DT	AN16-3DT
	2°	GXE16-2DT	AE16-2DT	GXN16-2DT	AN16-2DT
	1° (Standard)	GX16-1DT	A16-1DT	GX16-1DT	A16-1DT
	0°	GXE16-0DT	AE16-0DT	GXN16-0DT	AN16-0DT
	-1°	GXE16-99DT	AE16-99DT	GXN16-99DT	AN16-99DT
Clamp-on	-2°	GXE16-98DT	AE16-98DT	GXN16-98DT	AN16-98DT
	4°	GXE16-4	AE16-4	GXN16-4	AN16-4
	3°	GXE16-3	AE16-3	GXN16-3	AN16-3
	2°	GXE16-2	AE16-2	GXN16-2	AN16-2
	1° (Standard)	GXE16-1	A16-1	GXN16-1	A16-1
	0°	GXE16-0	AE16-0	GXN16-0	AN16-0
	-1°	GXE16-99	AE16-99	GXN16-99	AN16-99
	-2°	GXE16-98	AE16-98	GXN16-98	AN16-98

Target items for the replacement of shims (Size 16 · Insert).

Thread type	External			Internal		
	Designation	Grades	Replacement	Designation	Grades	Replacement
ISO			① Conventional  ① Standard (New)	16IR15ISO-B	AH725	② Conventional  ② Standard (New)
				16IR17ISO-B	AH725	
				16IR20ISO-B	AH725	
55°	16ERAG55-B	AH725		16IRAG55-B	AH725	
				16IRG55-B	AH725	
				16IRAG60-B	AH725	
60°	16ERA60-B	AH725		16IRA60-B	AH725	
				16IRG60-B	AH725	
				16IR18UN-B	AH725	
UN				16IR16UN-B	AH725	
				16IR14UN-B	AH725	
W				16IR16W-B	AH725	
				16IR14W-B	AH725	
PT				16IR14PT-B	AH725	
NPT	16ER8NPT-B	AH725		16IR14NPT-B	AH725	
				16IR115NPT-B	AH725	


TOOLHOLDERS

TUNGTHREAD

SER

Screw-on external threading toolholder

New

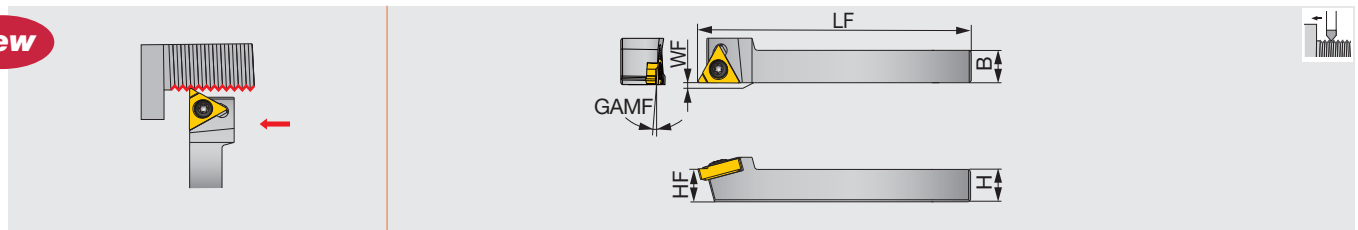

Designation	H	B	LF	HF	WF	GAMF	Insert
SER0808H11	8	8	100	8	0	1.5°	11ER...
SER1010H11	10	10	100	10	0	1.5°	11ER...


SPARE PARTS

Designation	Clamping screw	Wrench
SER**H11	SR M2.6-L6.7-S11	T-8/5

TUNGTHREAD

JSE2R16-CHP

External threading.High-pressure coolant capability, including DirectTungJet system

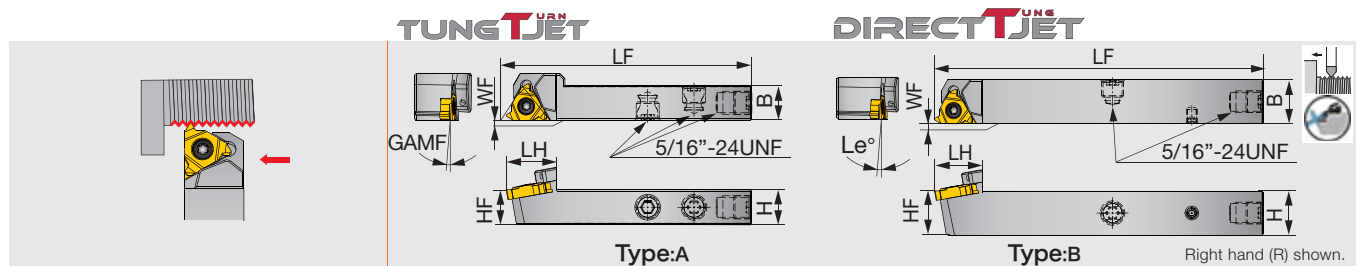

Designation	H	B	LF	LH	HF	WF	GAMF	Type	Insert
JSE2R1212F16-CHP	12	12	85	19	12	0	1°	A	16ER...
JSE2R1212X16-CHP	12	12	120	19	12	0	1°	B	16ER...
JSE2R1616X16-CHP	16	16	120	19	16	0	1°	B	16ER...

SPARE PARTS

Designation	Clamping screw	Wrench
JSE2R**16-CHP	CSTB-3.5	T-15F


* External coolant tube connection type

DIRECTTUNGJET system


Tube-free design streamlines tool setup.Through-coolant supply enables high productivity.

■ Coolant is supplied from the tool post directly to the tools

Optional connection with external coolant tube

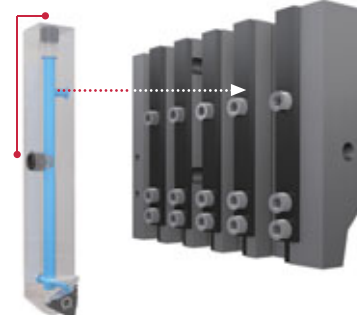


Detailed view of the coolant flow after connection



TUNGTHREAD

CER/L

Clamp-on toolholders for external threading (screw-on type available as option for -DT type holders)

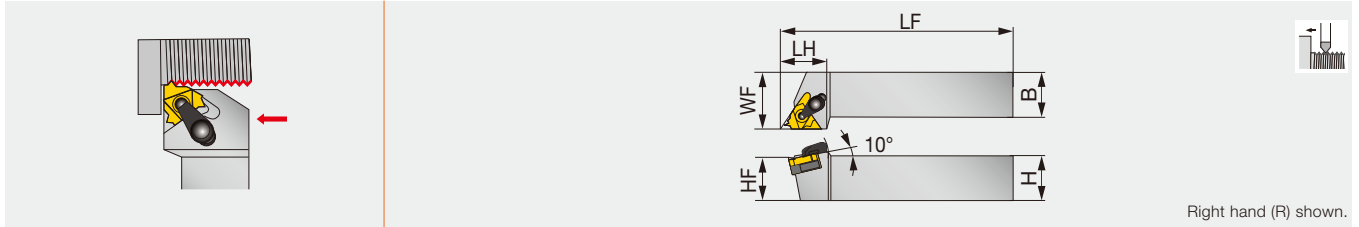

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	Insert
CER/L1212H16DT	12	12	100	24	12	16	16ER/L...
CER/L1616H16DT	16	16	100	24	16	20	16ER/L...
CER/L2020K16DT	20	20	125	24	20	25	16ER/L...
CER/L2525M16DT	25	25	150	28	25	32	16ER/L...
CER/L2525M22DT	25	25	150	31.3	25	32	22ER/L...
CER3232P16T	32	32	170	32	32	40	16ER...
CER3232P22T	32	32	170	32	32	40	22ER...
CER2525M27T	25	25	150	34	25	32	27ER...
CER3232P27T	32	32	170	34	32	40	27ER...

Note: A clamp set for CER/L type consists of a clamp and a clamping screw. A shim set for CER/L type consists of a shim and a shim screw. Standard shims for CER/L type can be used for both left hand and right hand toolholders. Use either of the sides depending on the hand.


SPARE PARTS

Designation	Clamp set	Clamping screw	Screw	Shim	Shim set	Wrench	Wrench 1	Wrench 2
CER/L**16DT	CSP16	CSTB-3.5ST	DTS5-3.5	A16-1DT	-	P-3.5	T-15F	-
CER/L2525M22DT	CSP22	CSTB-4ST	DTS6-4	GX22-1DT	-	P-4	T-15F	T-20F
CER3232P16T	CSP16	-	-	-	A16-1	-	T-15F	-
CER3232P22T	CSP22	-	-	-	NXE22-1	-	T-20F	-
CER**27T	CSP27	-	-	-	NXE27-1	P-4	-	-

TUNGCAP

C-CER/L

TungThread external threading toolholders, alternative clamping of screw-on or clamp-on

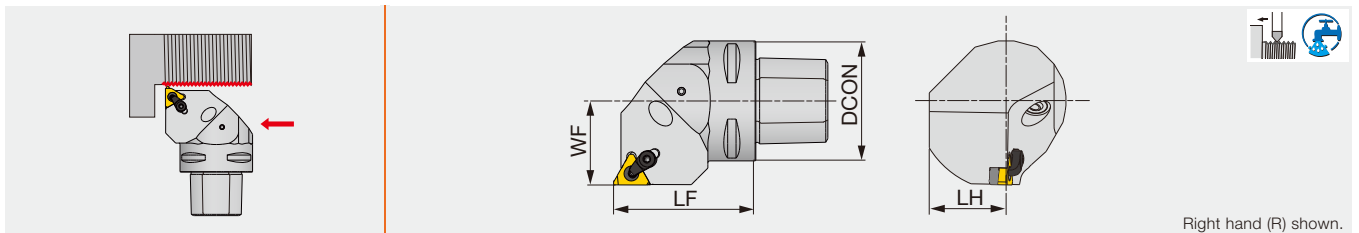

Right hand (R) shown.

Designation	DCON	LF	LH	WF	RE	Insert
C4CER/L27050-16ERN(2)	40	50	25	27	0.8	16ER/L...
C5CER/L35060-16ER(1)	50	60	32	35	0.8	16ER/L...
C5CER/L35060-16ERN(2)	50	60	32	35	0.8	16ER/L...
C6CER/L45065-16ER(1)	63	65	41	45	0.8	16ER/L...
C6CER/L45065-16ERN(2)	63	65	41	45	0.8	16ER/L...

(1) Applicable for 3 MPa pressure coolant. (2) Applicable for 7 MPa pressure coolant.


SPARE PARTS

Designation	Clamp set	Clamping screw	Coolant parts	Screw	Shim	Wrench	Wrench 1
C5CE*35060-16ER	CSP16	CSTB-3.5ST	EZ104	DTS5-3.5	A16-1DT	P-3.5	T-15F
C5CE*35060-16ERN	CSP16	CSTB-3.5ST	SATZ-M10X1-M5	DTS5-3.5	A16-1DT	P-3.5	T-15F
C6CE*45065-16ER	CSP16	CSTB-3.5ST	EZ104	DTS5-3.5	A16-1DT	P-3.5	T-15F
C6CE*45065-16ERN	CSP16	CSTB-3.5ST	SATZ-M10X1-M5	DTS5-3.5	A16-1DT	P-3.5	T-15F

TUNGTHREAD

JS-SEL16

External threading toolholders for Swiss-type lathe

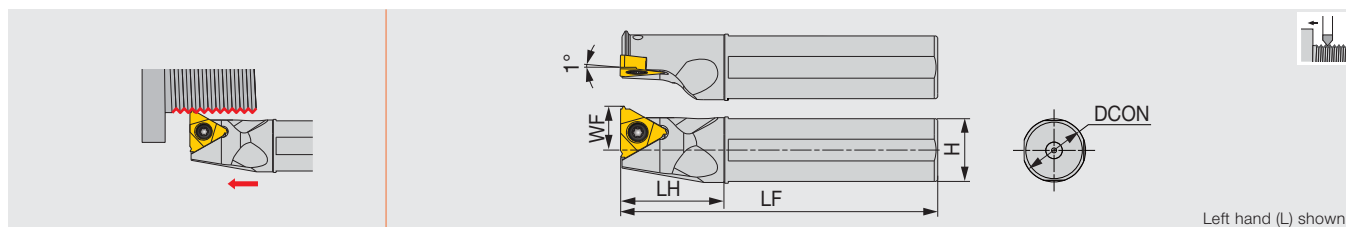

Left hand (L) shown.

Designation	DCON	H	LF	LH	WF	Insert
JS16F-SEL16	16	15	85	25	11	16ER...
JS19G-SEL16	19.05	18	90	30	12.5	16ER...
JS19X-SEL16	19.05	18	120	30	12.5	16ER...
JS20G-SEL16	20	19	90	30	13	16ER...
JS20X-SEL16	20	19	120	30	13	16ER...
JS25HSEL16	25	24	100	30	15.5	16ER...
JS254X-SEL16	25.4	24	120	30	15.7	16ER...


SPARE PARTS

Designation	Clamping screw	Wrench 1
JS***-SEL16	CSTB-3.5	T-15F

TUNGTHREAD

B-S/CER/L

External threading toolholders for Swiss-type lathe

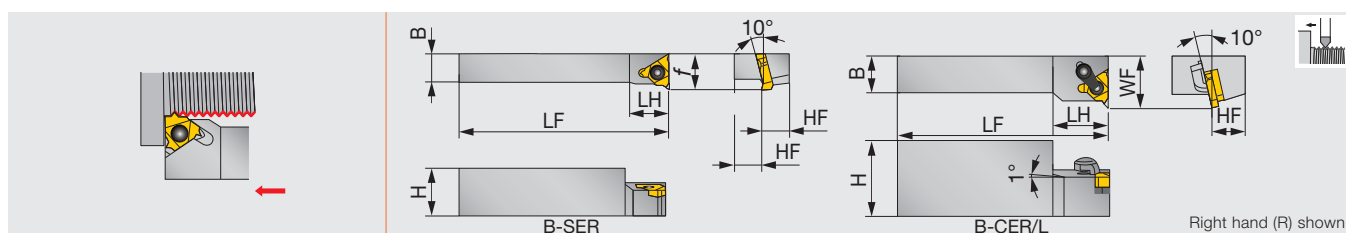

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	Insert
B-SER10H16	20	10	100	15	10	16	16ER...
B-SER12K16	24	12	125	18	12	18	16ER...
B-CER/L16M16	32	16	150	24	16	22	16ER/L...


SPARE PARTS

Designation	Clamp set	Shim set	Clamping screw	Wrench
B-SER**16	-	-	CSTB-3.5	T-15F
B-CER/L16M16	CSP16	A16-1	-	T-15F

TUNGTHREAD

BC-SER/L

Multi functional external threading toolholders for small lathe

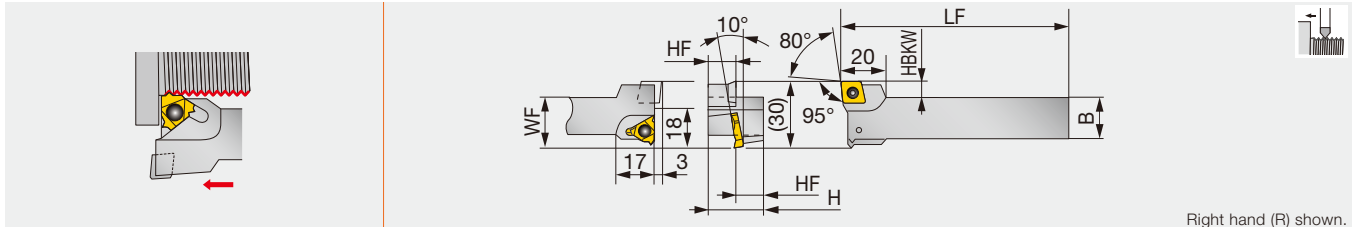

Right hand (R) shown.

Designation	H	B	LF	HF	WF	HBKW	Insert
BC-SER12K16	24	16	125	12	23	7	16ER..., CC*T09T3...


SPARE PARTS

Designation	Clamping screw	Wrench
BC-SER12K16	CSTB-3.5	T-15F

TUNGTHREAD

SNR/L-2/3

Small-diameter internal threading toolholder, screw-on

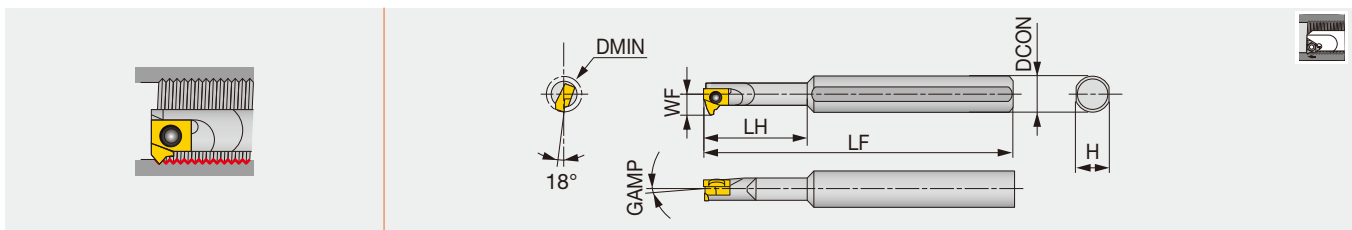

Designation	Material	DMIN	DCON	WF	LF	LH	H	GAMP	Insert
SNR0006H06-2	STEEL	8	8	4.7	100	18	7	2°	6IR...
SNR0006H06-3	STEEL	8	8	4.7	100	18	7	3°	6IR...
SNR0008H06-2	STEEL	10	8	5.7	100	18	7	2°	6IR...
SNR0008H06-3	STEEL	10	8	5.7	100	18	7	3°	6IR...
SNR0006K06SC-2	CARBIDE	8	8	4.7	125	30	7	2°	6IR...
SNR0006K06SC-3	CARBIDE	8	8	4.7	125	30	7	3°	6IR...
SNR0008K06SC-2	CARBIDE	10	8	5.7	125	18	7	2°	6IR...
SNR0008K06SC-3	CARBIDE	10	8	5.7	125	18	7	3°	6IR...


SPARE PARTS

Designation	Clamping screw	Wrench
SNR0006H06...	CSTB-2L040	T-6F
SNR0008H06...	CSTB-2L	T-6F
SNR0006K06SC...	CSTB-2L040	T-6F
SNR0008K06SC...	CSTB-2L	T-6F

TUNGTHREAD

SNR/L

Internal threading bars, Screw-on clamp

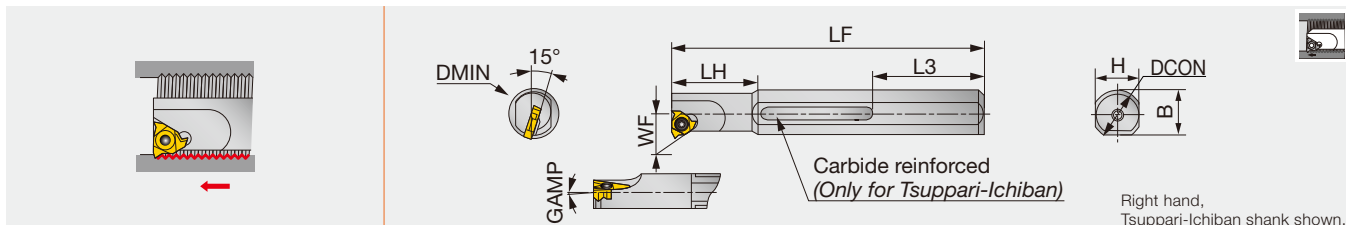

Designation	Material	DMIN	DCON	WF	LF	LH	L3	H	B	GAMP	Insert
TSNR0016Q16	Tuppari	19	16	10.6	180	40	59	15	-	1°	16IR...
TSNR0020R22	Tuppari	24	20	13.9	200	50	49	18	-	1°	22IR...
SNR/L0010K11	STEEL	12	16	6.6	125	25	-	15	15.5	1°	11IR/L...
SNR0010K11-2	STEEL	12	16	6.6	125	25	-	15	15.5	2°	11IR...
SNR0010K11-3	STEEL	12	16	6.6	125	25	-	15	15.5	3°	11IR...
SNR/L0013L11	STEEL	15	16	8.2	140	32.5	-	15	15.5	1°	11IR/L...
SNR0013L11-2	STEEL	15	16	8.2	140	32.5	-	15	15.5	2°	11IR...
SNR0013L11-3	STEEL	15	16	8.2	140	32.5	-	15	15.5	3°	11IR...
SNR/L0016M16	STEEL	19	16	10.6	150	40	-	15	15.5	1°	16IR/L...
SNR0016M16-2	STEEL	19	16	10.6	150	40	-	15	15.5	2°	16IR...
SNR0016M16-3	STEEL	19	16	10.6	150	40	-	15	15.5	3°	16IR...
SNR/L0020Q22	STEEL	24	20	13.9	180	50	-	18	19	1°	22IR/L...
SNR0020Q22-2	STEEL	24	20	13.9	180	50	-	18	19	2°	22IR...
SNR0020Q22-3	STEEL	24	20	13.9	180	50	-	18	19	3°	22IR...
SNR0010M11SC	CARBIDE	13	10	7.4	150	24	-	9	-	1°	11IR...
SNR0010M11SC-2	CARBIDE	13	10	7.4	150	24	-	9	-	2°	11IR...
SNR0010M11SC-3	CARBIDE	13	10	7.4	150	24	-	9	-	3°	11IR...
SNR0012P11SC	CARBIDE	15	12	8.5	170	28	-	11	-	1°	11IR...
SNR0012P11SC-2	CARBIDE	15	12	8.5	170	28	-	11	-	2°	11IR...
SNR0012P11SC-3	CARBIDE	15	12	8.5	170	28	-	11	-	3°	11IR...
SNR/L0016R16SC	CARBIDE	20	16	11.9	200	35	-	15	-	1°	16IR/L...
SNR0016R16SC-2	CARBIDE	20	16	11.9	200	35	-	15	-	2°	16IR...

Note: When using a right or left hand insert, the right hand insert (**IR...type) is used for the right hand toolholders (SNR...type) and left hand insert (**L...type) is used for the left hand toolholders (SNL...type).

SPARE PARTS




Designation	Clamping screw	Wrench
TSNR0016Q16	CSTB-3.5	T-15F
TSNR0020R22	CSTB-4	T-15F
SNR/L00**11...	CSTB-2.5	T-8F
SNR/L0016M16...	CSTB-3.5	T-15F
SNR/L0020Q22...	CSTB-4	T-15F
SNR00**11SC...	CSTB-2.5	T-8F
SNR/L0016R16SC...	CSTB-3.5	T-15F

TUNGTHREAD

CNR/L

Internal threading bars, alternative clamping of screw-on or clamp-on(DT type only)

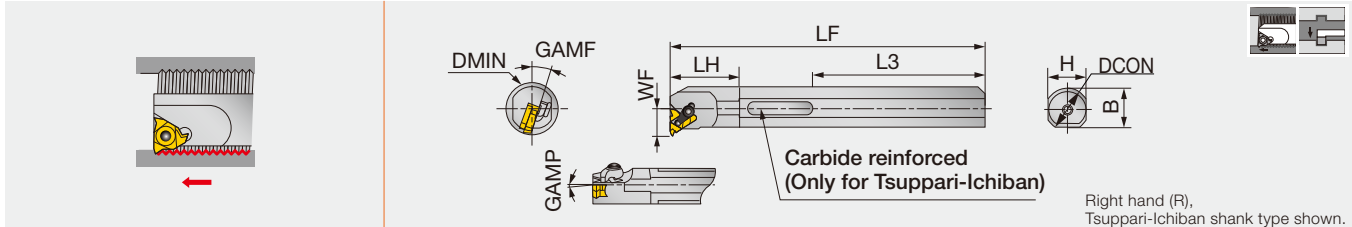

Designation	Material	DMIN	DOCN	WF	LF	LH	L3	H	B	GAMF	GAMP	Insert
TCNR0020R16DT	TSUPPARI	24	20	14	200	30	49	18	-	15°	1°	16IR...
TCNR0025S16DT	TSUPPARI	29	25	16.5	250	38	64	23	-	15°	1°	16IR...
TCNR0025S22DT	TSUPPARI	30	25	18.2	250	38	64	23	-	15°	1°	22IR...
CNR/L0020P16	STEEL	24	20	14	170	30	-	18	19	15°	1°	16IR/L...
CNR/L0025R16	STEEL	29	25	16.5	200	38	-	23	24	15°	1°	16IR/L...
CNR/L0032S16	STEEL	37	32	20.1	250	48	-	30	31	15°	1°	16IR/L...
CNR/L0025R22	STEEL	30	25	18.2	200	38	-	23	24	15°	1°	22IR/L...
CNR/L0032S22	STEEL	38	32	21.9	250	48	-	30	31	15°	1°	22IR/L...
CNR0040T27	STEEL	46	40	26.9	300	60	-	37	38.5	10°	1°	27IR...


Note: A clamp set for CNR/L type toolholders consists of a clamp and a clamping screw. A shim set for CNR/L type toolholders consists of a shim and a shim fixing screw. Standard shims for CNR/L type toolholders are commonly used for right and left hand toolholders. The right hand insert (IR) is used for the right hand toolholder (CNR...) and left hand insert (IL) is used for left hand toolholder (CNL...).

SPARE PARTS

Designation	Clamp set	Clamping screw	Screw	Shim	Shim set R	Shim set L	Wrench	Wrench 1	Wrench 2
TCNR002**16DT	CSP16	CSTB-3.5ST	DTS5-3.5	A16-1DT	-	-	P-3.5	T-15F	-
TCNR0025S22DT	CSP22	CSTB-4ST	DTS6-4	GX22-1DT	-	-	P-4	T-15F	T-20F
CNR/L**16	CSP16	-	-	-	A16-1	A16-1	-	T-15F	-
CNR/L**22	CSP22	-	-	-	NXN22-1	NXE22-1	-	T-20F	-
CNR0040T27	CSP27	-	-	-	NXN27-1	NXE27-1	P-4	-	-


External threading

Right hand thread




Work rotation	Regular
Feed direction	Push
Hand of toolholder	Right
Hand of insert	Right
Standard shim	①


Left hand thread




Work rotation	Reverse
Feed direction	Push
Hand of toolholder	Left
Hand of insert	Left
Standard shim	②




Work rotation	Regular
Feed direction	Pull
Hand of toolholder	Left
Hand of insert	Left
Standard shim	④




Work rotation	Reverse
Feed direction	Pull
Hand of toolholder	Right
Hand of insert	Right
Standard shim	③




Work rotation	Reverse
Feed direction	Push
Hand of toolholder	Right
Hand of insert	Right
Standard shim	①



Work rotation	Regular
Feed direction	Push
Hand of toolholder	Left
Hand of insert	Left
Standard shim	②




Work rotation	Reverse
Feed direction	Pull
Hand of toolholder	Left
Hand of insert	Left
Standard shim	④




Work rotation	Regular
Feed direction	Pull
Hand of toolholder	Right
Hand of insert	Right
Standard shim	③

Internal threading


Right hand thread




Work rotation	Regular
Feed direction	Push
Hand of toolholder	Right
Hand of insert	Right
Standard shim	②



Work rotation	Reverse
Feed direction	Push
Hand of toolholder	Left
Hand of insert	Left
Standard shim	①



Work rotation	Reverse
Feed direction	Pull
Hand of toolholder	Left
Hand of insert	Left
Standard shim	③



Work rotation	Regular
Feed direction	Pull
Hand of toolholder	Right
Hand of insert	Right
Standard shim	④


Standard shim

No.	New	No.	New
①	A16-1DT	②	A16-1DT
	A16-1		A16-1
	GX22-1DT		GX22-1DT
	NXE22-1		NXN22-1
	NXE27-1		NXN27-1
③	AE16-99DT	④	AN16-99DT
	AE16-99		AN16-99
	GXE22-99DT		GXN22-99DT
	NXE22-99		NXN22-99
	NXE27-99		NXN27-99

Fundamentals of screw threads


Relationship between lead, lead angle and pitch

1. Lead is the axial distance a screw advances in one rotation. In single start screw, the lead is equal to the pitch.
2. The inclination angle of a threaded groove is called lead angle. In screws of the same diameter, the lead angle increases as the pitch increases.
3. The side face of a completed thread groove is called the flank. The distance between the crest and the root is called thread height.

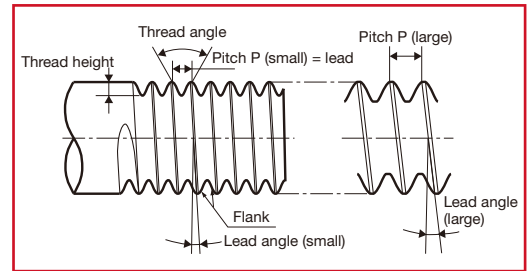

Single and multi start thread

1. The single start thread has a single groove. Two start thread or three start thread has two grooves or three grooves respectively.
2. The pitch of multi start thread is the distance of adjoining groove.
3. When viewing the section of the multi start thread, the pitch is same as that of the single start thread. The lead of the two or three start thread is twice or three times the pitch. The multi start thread is mainly used for trapezoidal threads.

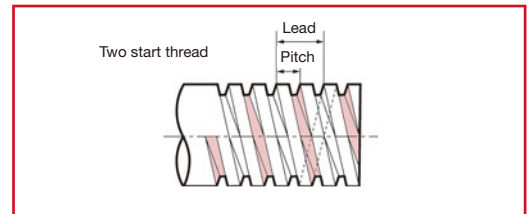

Tolerance class of threads

Tolerance classes of screw threads are expressed as follows:

Metric coarse external thread: 6h, 6g

Metric coarse internal thread: 5H, 6H

These classes are ranked with tolerances of thread diameter, pitch, thread angle, etc. For fastening applications, 6H- and 6g-class (former

JIS second class) threads, manufactured by cutting or rolling, are generally used. 5H- and 4h-class threads (former JIS first class) are generally finished by grinding.

For example, M8-6g means metric coarse external thread of 6g tolerance class.

TAC threading insert



Difference between full-profile and partial-profile insert

Full-profile insert


In the full-profile insert, the major diameter of the thread is finished by the profiled finishing edge as shown in the figure below. Therefore, about 0.1 mm of finishing stock must be left on the outer surface of the workpiece before threading. In trapezoidal threads, since slants of 15°

to 30° are left on the crest of the thread as shown in the figure below, these portions must be finished by another tool later.

Full-profile insert removes burrs on the crest.

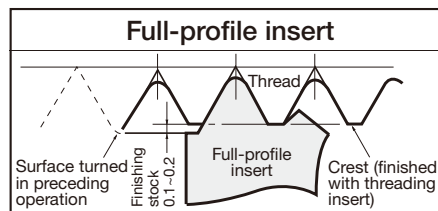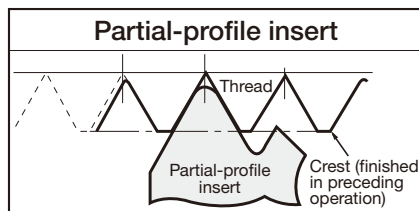

When machining trapezoidal threads:

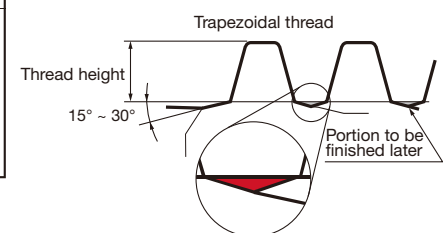

Partial-profile insert

Partial-profile inserts cannot be used for finishing of the crest, but can be applied to a wide range of pitches.

For example

Designation	Pitch (mm)	TPI	Insert radius RE (mm)
16ERA60	0.5 ~ 1.5	48 ~ 16	0.06
16ERG60	1.75 ~ 3	14 ~ 8	0.22

Corner radii of inserts are fitted to the thread of the smallest pitch.

Fundamentals of screw threads

Difference between external and internal use inserts

In full-profile inserts for metric and unified threads, the corner radius and thread height differ from those for the external and internal use insert respectively. Therefore, the right hand insert for external use and the left hand insert for internal use are not the same tool.

Since the rake angles of toolholders are -10° for external toolholders and -15° for internal toolholders, the external / internal toolholders can not be used for machining internal / external thread.

In Whitworth thread, though the external thread and internal thread have the same thread form, the external and internal toolholders are incompatible because of the different rake angle.

For example

Designation	Applicable inserts	Insert radius RE (mm)	Thread height (mm)	Rake angle of holders
16ER20ISO	External	0.25	1.52	-10°
16IL20ISO	Internal	0.14	1.3	-15°

Compensation for the lead angle and tool relief angle

When the pitch is large or the screw diameter is small, the lead angle becomes large and the effective relief angle on the advance flank side β_2 becomes small. In particular, this will cause shorter life of the insert in the case of trapezoidal screw with small flank angle. It is ideal without any interference for the thread cutting insert to have an equal relief angle on both right and left. Replace the shim so that the rake face of insert faces the thread groove direction ($\beta = \beta_3$).

Calculating the lead angle

The lead angle is calculated as follows:

$$\beta = \tan^{-1}(\ell / \pi d) = \tan^{-1}(nP / \pi d)$$

β : Lead angle
 ℓ : Lead
 n : No. of threads
 P : Pitch
 d : Pitch diameter

Calculating the relief angle

The relief angle β_1 is calculated as follows:

$$\beta_1 = \tan^{-1}(\tan \theta \cdot \tan \alpha)$$

The α of a standard toolholder is 10° for external threading and 15° for internal threading.

Included angle 2θ	θ	β_1	
		External threading tool	Internal threading tool
60°	30°	5.8°	8.8°
55°	27.5°	5.2°	7.9°
30°	15°	2.7°	4.1°
29°	14.5°	2.6°	4°



Accordingly, the effective relief angle is calculated as follows:

$$\beta_2 = \beta_1 + \beta_3 - \beta$$

β : Lead angle
 β_2 : Effective relief angle
 β_3 : Lead angle compensation value

In other words, $\beta_1 = \beta_2$ when the thread lead angle is equal to the compensation value. Namely, the relief angle of the tool itself is equal to the effective relief angle. If the wrong compensation value is used, $\beta_1 > \beta_2$. The effective relief angle becomes smaller and cause the interference between the flank side of insert and the thread groove. Therefore, carry out compensation of the lead angle so that the following range is obtained:


$\pm 1^\circ$ when the thread angle is 60° and 55°
 $\pm 30^\circ$ when the thread angle is 30° and 29°

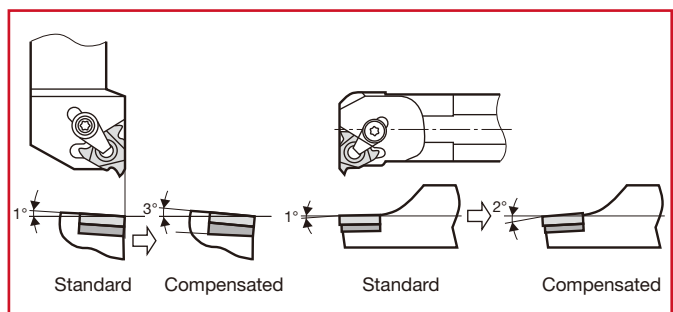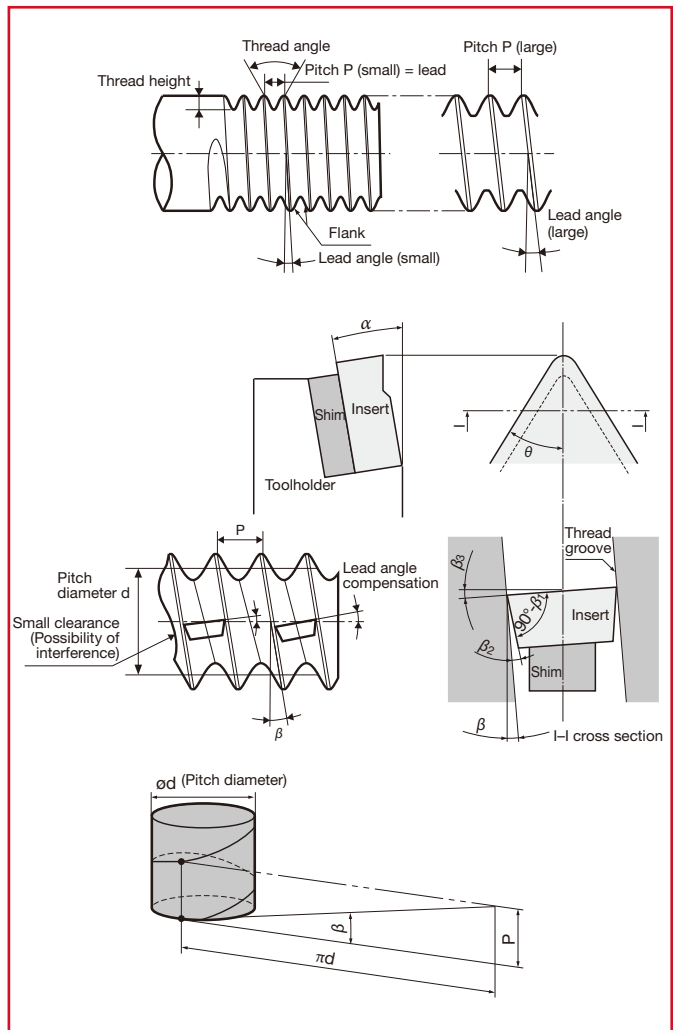

Compensation of lead angle for shim less internal toolholders

When using internal threading toolholders without shim, the above-mentioned method can not be applied for lead angle compensation. Therefore, special toolholders for large lead angles are available as shown below. The final figure of

the designation (-2 or -3) indicates 2° or 3° lead angle to be used respectively. The toolholders without these figures are for 1° lead angle.

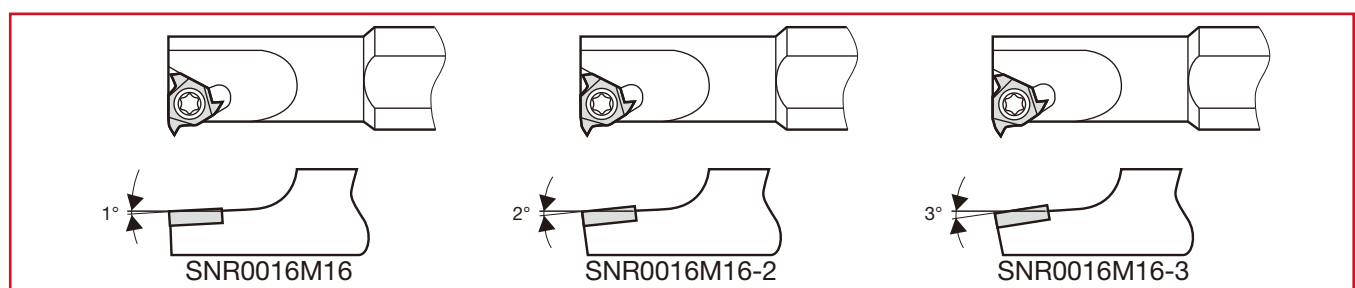

Shim replacement method of ST-type tools

Type of shim and the compensation value of lead angle

The designation of the shim and compensated lead angles are shown in the table.

Compensated lead angles	-2°	-1°	0°	1°	2°	3°	4°
Shim	□□□-98	□□□-99	□□□-0	□□□-1	□□□-2	□□□-3	□□□-4

Note: The last numeral of the shim designation is the compensated lead angle.

Toolholders and applicable shims

Screw-on / clamp-on dual toolholders

Toolholder designation	Shim	
	R	L
CER/L□□□□16DT	AE16-□DT	AN16-□DT
CER/L□□□□22DT	GXE22-□DT	GXN22-□DT
TCNR/L□□□□16DT	AN16-□DT	AE16-□DT
TCNR/L□□□□22DT	GXN22-□DT	GXE22-□DT


Note: Standard shim is AE16-1DT or GX22-1DT. Other types are optional.

Clamp-on type toolholders

Toolholder designation	Shim	
	R	L
CER/L□□□□16-T	AE16-□	AN16-□
CER/L□□□□22-T	NXE22-□	NXN22-□
CER/L□□□□27-T	NXE27-□	NXN27-□
CNR/L□□□□16	AN16-□	AE16-□
CNR/L□□□□22	NXN22-□	NXE22-□
CNR/L□□□□27	NXN27-□	NXE27-□
B-CER/L□□□16	AE16-□	AN16-□

Note: Standard shim is □□□□-1. Other types are optional.

Shim selection guide for screw-on / clamp-on dual ST-type tools

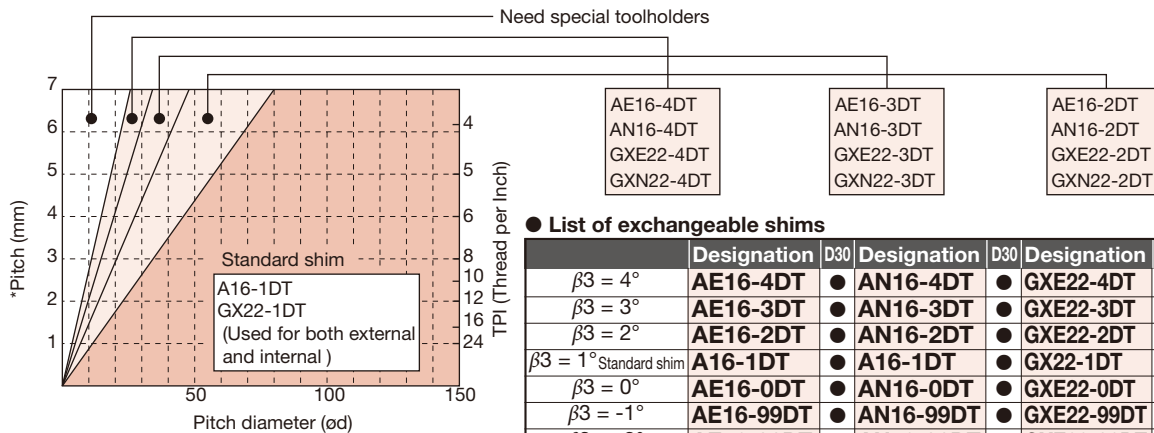


* For the multi start thread lead (multiplied by the pitch and No. of threads)

List of exchangeable shims

	Designation	D30	Designation	D30	Designation	D30	Designation	D30
$\beta_3 = 4^\circ$	AE16-4DT	●	AN16-4DT	●	GXE22-4DT	●	GXN22-4DT	●
$\beta_3 = 3^\circ$	AE16-3DT	●	AN16-3DT	●	GXE22-3DT	●	GXN22-3DT	●
$\beta_3 = 2^\circ$	AE16-2DT	●	AN16-2DT	●	GXE22-2DT	●	GXN22-2DT	●
$\beta_3 = 1^\circ$ Standard shim	A16-1DT	●	A16-1DT	●	GX22-1DT	●	GX22-1DT	●
$\beta_3 = 0^\circ$	AE16-0DT	●	AN16-0DT	●	GXE22-0DT	●	GXN22-0DT	●
$\beta_3 = -1^\circ$	AE16-99DT	●	AN16-99DT	●	GXE22-99DT	●	GXN22-99DT	●
$\beta_3 = -2^\circ$	AE16-98DT	●	AN16-98DT	●	GXE22-98DT	●	GXN22-98DT	●
Applicable toolholders	CER--16DT TCNL--16DT		CEL--16DT TCNR--16DT		CER--22DT TCNL--22DT		CEL--22DT TCNR--22DT	

Shim selection guide for clamp-on type ST-tools

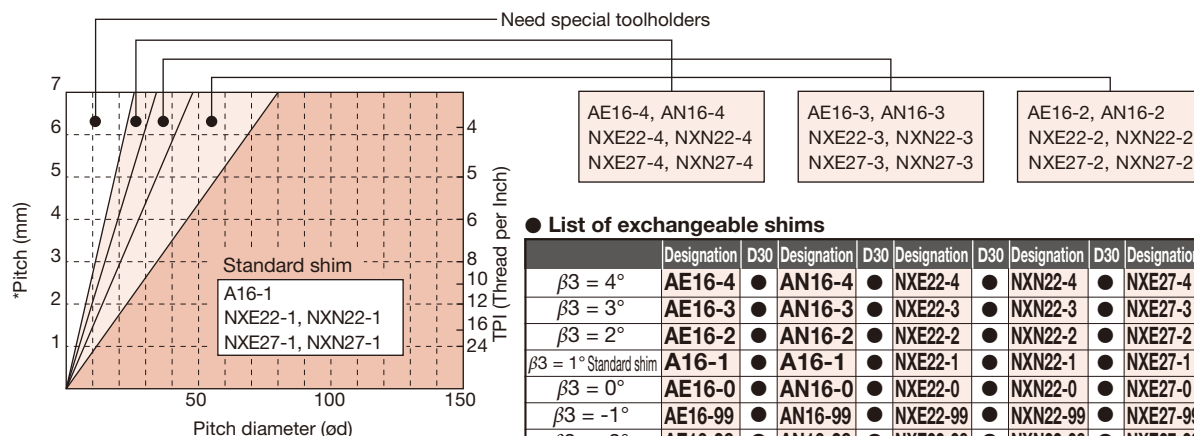

* For the multi start thread lead (multiplied by the pitch and No. of threads)

List of exchangeable shims

	Designation	D30	Designation	D30	Designation	D30	Designation	D30	Designation	D30
$\beta_3 = 4^\circ$	AE16-4	●	AN16-4	●	NXE22-4	●	NXN22-4	●	NXE27-4	●
$\beta_3 = 3^\circ$	AE16-3	●	AN16-3	●	NXE22-3	●	NXN22-3	●	NXE27-3	●
$\beta_3 = 2^\circ$	AE16-2	●	AN16-2	●	NXE22-2	●	NXN22-2	●	NXE27-2	●
$\beta_3 = 1^\circ$ Standard shim	A16-1	●	A16-1	●	NXE22-1	●	NXN22-1	●	NXE27-1	●
$\beta_3 = 0^\circ$	AE16-0	●	AN16-0	●	NXE22-0	●	NXN22-0	●	NXE27-0	●
$\beta_3 = -1^\circ$	AE16-99	●	AN16-99	●	NXE22-99	●	NXN22-99	●	NXE27-99	●
$\beta_3 = -2^\circ$	AE16-98	●	AN16-98	●	NXE22-98	●	NXN22-98	●	NXE27-98	●
Applicable toolholders	CER--16T CNL--16 B-CER--16		CEL--16T CNR--16 B-CEL--16		CER--22T CNL--22		CEL--22T CNR--22		CER--27T CNL--27	

● : Line up

Selection of Internal Toolholders—Relationship between thread sizes, toolholders, and inserts—Part 1

Metric coarse screw thread (ISO)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank														Carbide shank								"Tsugami- Ichiban"		
				Insert size	6IR				11IR				16IR		22IR				27IR		6IR			11IR		16IR		22IR	
				Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11-2	SNR0010K11-3	SNR0013L11-2	SNR0013L11-3	SNR0016M16-2	SNR0016M16-3	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	(CNR0040T22)	CNR0040T27	(CNR0050U27)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC-2	SNR0010M11SC-3	SNR0016R16SC-2	(SNR0016R16SC-3)
Insert Cat. No.																													
M10	1.5	9.03	3°02'	IR15ISO																									
M11	1.5	10.03	2°44'	IR15ISO		○															○								
M12	1.75	10.86	2°56'	IR175ISO		○															○								
M14	2	12.7	2°52'	IR20ISO		•		○													•		○						
M16	2	14.7	2°29'	IR20ISO	•		○													•		○							
M18	2.5	16.38	2°47'	IR25ISO																									
M20	2.5	18.38	2°29'	IR25ISO																									
M22	2.5	20.38	2°14'	IR25ISO																									
M24	3	22.05	2°29'	IR30ISO																									
M27	3	25.05	2°11'	IR30ISO									○													○			
M30	3.5	27.73	2°18'	IR35ISO																									
M33	3.5	30.73	2°05'	IR35ISO											○														
M36	4	33.4	2°11'	IR40ISO											○														
M39	4	36.4	2°00'	IR40ISO											•		2											2	
M42	4.5	39.08	2°06'	IR45ISO											•		2											2	
M45	4.5	42.08	1°57'	IR45ISO											•		2											2	
M48	5	44.75	2°02'	IR50ISO											•		2	2										2	2
M52	5	48.75	1°52'	IR50ISO											•		2	2										2	2
M56	5.5	52.43	1°55'	IR55ISO																									
M60	5.5	56.43	1°47'	IR55ISO																									
M64	6	60.1	1°49'	IR60ISO																									
M68	6	64.1	1°42'	IR60ISO																									

2 : Change the shim to NXN22-2

2 : Change the shim to NXN27-2

2 : Change the shim to GXN22-2DT

Metric fine screw thread (ISO)

1/4

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank								Carbide shank											
				Insert size	6IR				11IR				6IR				11IR							
				Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0010K11-3	SNR0013L11	SNR0013L11-2	SNR0013L11-3	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0010M11SC-3	SNR0012P11SC	SNR0012P11SC-2	SNR0012P11SC-3
				Insert Cat. No.																				
M9×0.75	0.75	8.51	1°36′	IR075ISO																				
M9×1	1	8.32	2°11′	IR10ISO																				
M10×0.75	0.75	9.51	1°26′	IR075ISO																				
M10×1	1	9.35	1°57′	IR10ISO	○									○										
M10×1.25	1.25	9.19	2°29′	IR125ISO																				
M11×0.75	0.75	10.51	1°18′	IR075ISO																				
M11×1	1	10.35	1°46′	IR10ISO	○									○										
M12×1	1	11.35	1°36′	IR10ISO	•		○							•		○								
M12×1.25	1.25	11.19	2°02′	IR125ISO	○									○										
M12×1.5	1.5	11.03	2°29′	IR15ISO	○									○										
M14×1	1	13.35	1°22′	IR10ISO																				
M14×1.25	1.25	13.19	1°44′	IR125ISO	•		○							•		○								
M14×1.5	1.5	13.03	2°06′	IR15ISO	•		○							•		○								
M15×1	1	14.35	1°16′	IR10ISO																				
M15×1.5	1.5	14.03	1°57′	IR15ISO	•		○							•		○								
M16×1	1	15.35	1°11′	IR10ISO					○															
M16×1.5	1.5	15.03	1°49′	IR15ISO	•		○							•		○								
M17×1	1	16.35	1°07′	IR10ISO					○								○							
M17×1.5	1.5	16.03	1°42′	IR15ISO	•		•		○					•		○								
M18×1	1	17.35	1°03′	IR10ISO					○								○							
M18×1.5	1.5	17.03	1°36′	IR15ISO	•		•		○					•		•		○						
M18×2	2	16.7	2°11′	IR20ISO	•		•		○					•		•		○						
M20×1	1	19.35	0°57′	IR10ISO					•			○					•			○				
M20×1.5	1.5	19.03	1°26′	IR15ISO					•			○					•			○				
M20×2	2	18.7	1°57′	IR20ISO	•		•		○					•		•			•			○		

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Metric fine screw thread (ISO)

2/4

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank												"Tsuyari- Ichiban"				
				Insert size	6IR				11IR				16IR				6IR				11IR				16IR				16IR				
				Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0013L11-3	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0010M11SC-3	SNR0012P11SC	SNR0012P11SC-2	SNR0012P11SC-3	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT
				Insert Cat. No.																													
M22×1	1	21.35	0°51′	IR10ISO					•		○									•			○										
M22×1.5	1.5	21.03	1°18′	IR15ISO	•		•		•		○					•		•		•			○										
M22×2	2	20.7	1°46′	IR20ISO	•		•			•		○				•		•			•			○									
M24×1	1	23.35	0°47′	IR10ISO							○			•						•			○								•		
M24×1.5	1.5	23.03	1°11′	IR15ISO	•		•				○			•			•		•		•			○						•			
M24×2	2	22.07	1°39′	IR20ISO	•		•			•		○				•		•			•			○									
M25×1	1	24.35	0°45′	IR10ISO					•		○			•									○			•				•			
M25×1.5	1.5	24.03	1°08′	IR15ISO	•		•		•		○			•			•		•				○			•				•			
M25×2	2	23.7	1°32′	IR20ISO	•		•			•		○			•			•			•			○									
M26×1.5	1.5	25.03	1°06′	IR15ISO	•		•		•		•			○			•		•		•			•			•					○	
M27×1	1	26.35	0°42′	IR10ISO						•		•			○					•			•			•						○	
M27×1.5	1.5	26.03	1°03′	IR15ISO	•		•		•		•			○			•		•		•			•			•					○	
M27×2	2	25.7	1°25′	IR20ISO	•		•		•		•			○			•		•			•			•			•				○	
M28×1	1	27.35	0°40′	IR10ISO						•		•			○						•			•			•					○	
M28×1.5	1.5	27.03	1°01′	IR15ISO	•		•		•		•			○			•		•		•			•			•					○	
M28×2	2	26.7	1°22′	IR20ISO	•		•		•		•			○			•		•		•			•			•					○	
M30×1	1	29.35	0°37′	IR10ISO						•		•			○					•			•			•						○	
M30×1.5	1.5	29.03	0°57′	IR15ISO						•		•			○					•			•			•						○	
M30×2	2	28.7	1°16′	IR20ISO	•		•		•		•			○			•		•		•			•			•					○	
M30×3	3	28.05	1°57′	IR30ISO											○																		
M32×1.5	1.5	31.03	0°53′	IR15ISO						•		•			○					•			•			•				•		○	
M32×2	2	30.07	1°11′	IR20ISO	•		•		•		•			○			○	•		•		•			•		•				•		○

Metric fine screw thread (ISO)

3/4

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank												“Tsuppari-Ichiban”									
				Insert size	6IR			11IR			16IR			22IR			6IR			11IR			16IR	16IR		22IR												
					Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	CNR0025R22	CNR0032S22	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	TSNR0020R22	TCNR0025S22DT
M33×1.5	1.5	32.03	0°51′	IR15ISO									○																									
M33×2	2	31.7	1°09′	IR20ISO	●		●			●		●		○							●		●						●		○							
M33×3	3	31.05	1°46′	IR30ISO									[2]								●		●						●		[2]							
M35×1.5	1.5	34.03	0°48′	IR15ISO						●		●		●	○										●		●			●		○						
M36×1.5	1.5	35.03	0°47′	IR15ISO						●		●		●	○									●		●			●		○							
M36×2	2	34.7	1°03′	IR20ISO	●		●			●		●		●	○						●		●						●		○							
M36×3	3	34.05	1°36′	IR30ISO									[2]								●		●						●		[2]							
M38×1.5	1.5	37.03	0°44′	IR15ISO						●		●		●	○										●		●			●		○						
M39×1.5	1.5	38.03	0°43′	IR15ISO						●		●		●	○										●		●			●		○						
M39×2	2	38.7	0°58′	IR20ISO						●		●		●	○										●		●			●		○						
M39×3	3	37.05	1°29′	IR30ISO						●		●		●	○										●		●			●		○						
M40×1.5	1.5	39.03	0°42′	IR15ISO						●		●		●	○										●		●			●		○						
M40×2	2	37.8	0°57′	IR20ISO						●		●		●	○										●		●			●		○						
M40×3	3	38.05	1°26′	IR30ISO								●		●	○														●		○							
M42×1.5	1.5	41.03	0°40′	IR15ISO						●		●		●	○										●		●			●		○						
M42×2	2	40.7	0°54′	IR20ISO						●		●		●	○										●		●			●		○						
M42×3	3	40.05	1°22′	IR30ISO								●		●	○														●		○							
M42×4	4	39.4	1°51′	IR40ISO													[2]																		●	[2]		
M45×1.5	1.5	44.03	0°37′	IR15ISO						●		●		●	○											●		●			○							
M45×2	2	43.7	0°50′	IR20ISO						●		●		●	○											●		●			○							
M45×3	3	43.05	1°16′	IR30ISO								●		●	○						●		●						●		○							
M45×4	4	42.4	1°43′	IR40ISO													[2]																		●	[2]		
M48×1.5	1.5	47.03	0°35′	IR15ISO						●		●		●	○										●		●			○								
M48×2	2	46.7	0°47′	IR20ISO						●		●		●	○											●		●			○							
M48×3	3	46.05	1°11′	IR30ISO								●		●	○														●		○							
M48×4	4	45.4	1°36′	IR40ISO													[2]																		●	[2]		

② : Change the shim to AN16-2
② : Change the shim to NXN22-2
② : Change the shim to AN16-2DT
② : Change the shim to GXN22-2DT

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Metric fine screw thread (ISO)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank														Carbide shank						"Tsuppari-Ichiban"																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
				Insert size	6IR		11IR		16IR				22IR		6IR		11IR		16IR	16IR	22IR																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
				Holder Cat. No.	SNR0008H06-2		SNR0008H06-3		SNR0008H06-2		SNR0008H06-3		SNR0010K11		SNR0010K11-2		SNR0013L11		SNR0013L11-2		SNR0016M16		SNR0016M16-2		CNR0020P16		CNR0025R16		CNR0032S16		(CNR040T16)		(CNR050U16)		SNR0020Q22		SNR0020Q22-2		CNR0025R22		CNR0032S22		(CNR040T22)		SNR0006K06SC-2		SNR0006K06SC-3		SNR0008K06SC-2		SNR0008K06SC-3		SNR0010M11SC		SNR0010M11SC-2		SNR0012P11SC		SNR0012P11SC-2		SNR0016R16SC		SNR0016R16SC-2		TSNR0016Q16		TCNR0020R16DT		TCNR0025S16DT		(TCNR0032T16DT)		TSNR0020R22		TCNR0025S22DT		(TCNR0032T22DT)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
				Insert Cat. No.	SNR0008H06-2		SNR0008H06-3		SNR0008H06-2		SNR0008H06-3		SNR0010K11		SNR0010K11-2		SNR0013L11		SNR0013L11-2		SNR0016M16		SNR0016M16-2		CNR0020P16		CNR0025R16		CNR0032S16		(CNR040T16)		(CNR050U16)		SNR0020Q22		SNR0020Q22-2		CNR0025R22		CNR0032S22		(CNR040T22)		SNR0006K06SC-2		SNR0006K06SC-3		SNR0008K06SC-2		SNR0008K06SC-3		SNR0010M11SC		SNR0010M11SC-2		SNR0012P11SC		SNR0012P11SC-2		SNR0016R16SC		SNR0016R16SC-2		TSNR0016Q16		TCNR0020R16DT		TCNR0025S16DT		(TCNR0032T16DT)		TSNR0020R22		TCNR0025S22DT		(TCNR0032T22DT)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
				Insert Cat. No.	SNR0008H06-2		SNR0008H06-3		SNR0008H06-2		SNR0008H06-3		SNR0010K11		SNR0010K11-2		SNR0013L11		SNR0013L11-2		SNR0016M16		SNR0016M16-2		CNR0020P16		CNR0025R16		CNR0032S16		(CNR040T16)		(CNR050U16)		SNR0020Q22		SNR0020Q22-2		CNR0025R22		CNR0032S22		(CNR040T22)		SNR0006K06SC-2		SNR0006K06SC-3		SNR0008K06SC-2		SNR0008K06SC-3		SNR0010M11SC		SNR0010M11SC-2		SNR0012P11SC		SNR0012P11SC-2		SNR0016R16SC		SNR0016R16SC-2		TSNR0016Q16		TCNR0020R16DT		TCNR0025S16DT		(TCNR0032T16DT)		TSNR0020R22		TCNR0025S22DT		(TCNR0032T22DT)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
Insert Cat. No.	SNR0008H06-2		SNR0008H06-3		SNR0008H06-2		SNR0008H06-3		SNR0010K11		SNR0010K11-2		SNR0013L11		SNR0013L11-2		SNR0016M16		SNR0016M16-2		CNR0020P16		CNR0025R16		CNR0032S16		(CNR040T16)		(CNR050U16)		SNR0020Q22		SNR0020Q22-2		CNR0025R22		CNR0032S22		(CNR040T22)		SNR0006K06SC-2		SNR0006K06SC-3		SNR0008K06SC-2		SNR0008K06SC-3		SNR0010M11SC		SNR0010M11SC-2		SNR0012P11SC		SNR0012P11SC-2		SNR0016R16SC		SNR0016R16SC-2		TSNR0016Q16		TCNR0020R16DT		TCNR0025S16DT		(TCNR0032T16DT)		TSNR0020R22		TCNR0025S22DT		(TCNR0032T22DT)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
M50×1.5	1.5	49.03	0°33′	IR15ISO					•	•		•	•	•	○	•																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												

Unified coarse screw thread (UNC)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material	Steel shank														Carbide shank								"Tsupper- Ichiban"								
				Insert size	11IR				16IR			22IR				27IR			11IR				16IR		22IR										
				Holder Cat. No.	SNR0010K11	SNR0010K11-2	SNR0010K11-3	SNR0013L11	SNR0013L11-2	SNR0013L11-3	SNR0016M16	SNR0016M16-2	SNR0016M16-3	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	(CNR0040T22)	CNR0040T27	(CNR0050U27)	(CNR0063V27)	SNR0010M11SC	SNR0010M11SC-2	SNR0010M11SC-3	SNR0012P11SC	SNR0012P11SC-2	SNR0012P11SC-3	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TCNR0025S22DT	(TCNR0032T22DT)		
				Insert Cat. No.																															
7/16-14UNC	14	9.93	3°20'	(IR14UN)																															
1/2-13UNC	13	11.43	3°07'	(IR13UN)																															
9/16-12UNC	12	12.91	2°59'	IR12UN																															
5/8-11UNC	11	14.38	2°56'	(IR11UN)																															
3/4-10UNC	10	17.4	2°40'	(IR10UN)																															
7/8-9UNC	9	20.39	2°31'	IR9UN																															
1-8UNC	8	23.34	2°29'	IR8UN						○																									
1 1/8-7UNC	7	26.22	2°31'	(IR7UN)																															
1 1/4-7UNC	7	29.39	2°15'	(IR7UN)								○																							
1 3/8-6UNC	6	32.17	2°24'	(IR6UN)								○																							
1 1/2-6UNC	6	35.35	2°11'	(IR6UN)								○			2															2					
1 3/4-5UNC	5	41.15	2°15'	(IR5UN)								○			2															2					
2-4 1/2UNC	4.5	47.14	2°11'	(IR45UN)																															
2 1/4-4 1/2UNC	4.5	53.49	1°55'	(IR45UN)													2																		
2 1/2-4UNC	4	59.38	1°57'	(IR4UN)													2																		
2 3/4-4UNC	4	65.73	1°46'	(IR4UN)													2	2																	
3-4UNC	4	72.08	1°36'	(IR4UN)													2	2																	
3 1/4-4UNC	4	78.43	1°29'	(IR4UN)													•	•	○																
3 1/2-4UNC	4	84.78	1°22'	(IR4UN)													•	•	○																
3 3/4-4UNC	4	91.13	1°16'	(IR4UN)													•	•	○																
4-4UNC	4	97.48	1°11'	(IR4UN)													•	•	○																

② : Change the shim to NXN22-2

② : Change the shim to NXN27-2

② : Change the shim to GXN22-2DT

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Unified fine screw thread (UNF)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material	Steel shank										Carbide shank										"Tsuppari-Ichiban"		
				Insert size	6IR				11IR		16IR				6IR				11IR			16IR		16IR			
				Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11-2	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNP0016Q16	TCNR0020R16DT	TCNR0025S16DT
Insert Cat. No.																											
3/8-24UNF	24	8.84	2°11'	(IR24UN)																							
				IRA60																							
7/16-20UNF	20	10.29	2°15'	(IR20UN)																							
				IRA60	○										○												
1/2-20UNF	20	11.87	1°57'	(IR20UN)																							
				IRA60	•		○								•		○										
9/16-18UNF	18	13.37	1°55'	(IR18UN)																							
				IRA60	•		○								•		○										
5/8-18UNF	18	14.96	1°43'	(IR18UN)																							
				IRA60	•		○								•		○										
3/4-16UNF	16	18.02	1°36'	IR16UN						○										○							
7/8-14UNF	14	21.05	1°34'	IR14UN						•	○									•		○					
1-12UNF	12	24.03	1°36'	IR12UN									○										○				
1 1/8-12UNF	12	27.2	1°25'	IR12UN								○										○		○			
1 1/4-12UNF	12	30.38	1°16'	IR12UN							•		○									○		•	○		
1 3/8-12UNF	12	33.55	1°09'	IR12UN							•		•	○								○		•	•	○	
1 1/2-12UNF	12	36.73	1°03'	IR12UN							•		•	○								○		•	•	○	

Unified extra fine screw thread (UNEF)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank								"Tsuppari-Ichiban"		
				Insert size	6IR		11IR			16IR				6IR		11IR			16IR		16IR						
				Holder Cat. No.																							
				Insert Cat. No.	SNR0006H06-2	SNR0008H06-2	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	CNR0032S16	SNR0006H06SC-2	SNR0008H06SC-2	SNR0010K11	SNR0010K11-2	SNR0012L11	SNR0012L11-2	SNR0016M16	SNR0016M16-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	
3/8	32	9.01	1°61′	IR32UN																							
7/16	28	10.52	1°57′	IR28UN	○									○													
1/2	28	12.11	1°37′	IR28UN																							
9/16	24	13.6	1°42′	IR24UN																							
5/8	24	15.19	1°27′	IR24UN																							
11/16	24	16.77	1°15′	IR24UN			○									○											
3/4	20	18.22	1°27′	IR20UN			○									○											
13/16	20	19.81	1°17′	IR20UN			•		○							•		○									
7/8	20	21.4	1°08′	IR20UN			•		○							•		○									
15/16	20	22.99	1°01′	IR20UN			•		•		○					•		○				○					
1	20	24.57	0°94′	IR20UN			•		•		○					•		•		○		○					
1 1/16	18	26.07	0°99′	IR18UN			•		•		○					•		•		○		○					
1 1/8	18	27.66	0°93′	IR18UN			•		•		○					•		•		○		○					
1 3/16	18	29.25	0°88′	IR18UN			•		•		•		○			•		•		○		•	○				
1 1/4	18	30.83	0°84′	IR18UN			•		•		•		○			•		•		○		•	○				
1 5/16	18	32.42	0°79′	IR18UN			•		•		•		○			•		•		○		•	○				
1 3/8	18	34.01	0°76′	IR18UN			•		•		•		•	○		•		•		○		•	•	○			
1 7/16	18	35.6	0°72′	IR18UN			•		•		•		•	○		•		•		○		•	•	○			
1 1/2	18	37.18	0°69′	IR18UN			•		•		•		•	○		•		•		○		•	•	○			
1 9/16	18	38.77	0°66′	IR18UN			•		•		•		•	○		•		•		○		•	•	○			
1 5/8	18	40.36	0°64′	IR18UN			•		•		•		•	•	○	•		•		○		•	•	○			
1 11/16	18	41.95	0°61′	IR18UN			•		•		•		•	•	○	•		•		○		•	•	○			

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Selection of ST-type Toolholders

Whitworth British Standard (BSW)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material	Steel shank										Carbide shank		“Tsuppari-Ichiban”					
				Insert size	16IR					22IR					16IR		16IR		22IR			
				Holder Cat. No.	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	SNR0016M16	SNR0016M16-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	TSNR0020R22	TCNR0025S22DT
				Insert Cat. No.																		
7/16	14	9.95	3°32′	IR14W																		
1/2	12	11.34	3°40′	IR12W																		
9/16	12	12.93	2°98′	IR12W																		
5/8	11	14.4	2°92′	IR11W																		
11/16	11	15.98	2°63′	IR11W																		
3/4	10	17.42	2°66′	IR10W																		
7/8	9	20.42	2°52′	IR9W																		
1	8	23.37	2°48′	IR8W																		
1 1/8	7	26.25	2°52′	IR7W																		
1 1/4	7	29.43	2°25′	IR7W							○											
1 1/2	6	35.39	2°18′	IR6W							○											
1 3/4	5	41.2	2°25′	IR5W							•		2								2	

2 : Change the shim to NXN22-2

2 : Change the shim to GXN22-2DT

Whitworth British Standard Fine (BSF)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank				“Tsuppari-Ichiban”						
				Insert size	6IR		11IR		16IR				22IR				6IR		16IR		16IR		22IR				
				Holder Cat. No.	SNR0006H06-2	SNR0008H06-2	SNR0010K11	SNR0010K11-2	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	SNR0006H06SC-2	SNR0008H06SC-2	SNR0016M16	SNR0016M16-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	TSNR0020R22	TCNR0025S22DT
				Insert Cat. No.																							
7/16	18	10.21	2°52′	IR18W																							
1/2	16	11.68	2°48′	IR16W	○													○									
9/16	16	13.27	2°18′	IR16W	•	○												•	○								
5/8	14	14.71	2°25′	IR14W																							
11/16	14	16.3	2°03′	IR14W				○																			
3/4	12	17.69	2°18′	IR12W																							
7/8	11	20.75	2°03′	IR11W																							
1	10	23.77	1°95′	IR10W						○																	
1 1/8	9	26.77	1°92′	IR9W						○										○							
1 1/4	9	29.94	1°72′	IR9W						•		2								○			2				
1 3/8	8	32.89	1°76′	IR8W						•		2								○			2				
1 1/2	8	36.07	1°61′	IR8W						•		•	2							○			•	2			
1 5/8	8	39.24	1°48′	IR8W					•			•	○							○			•	•	○		
1 3/4	7	42.13	1°57′	IR7W										○			2									2	
2	7	48.48	1°37′	IR7W										•				•	○						•	○	
2 1/4	6	54.44	1°42′	IR6W										•				•	○						•	○	
2 1/2	6	60.79	1°27′	IR6W										•				•	○						•	○	
2 3/4	6	67.14	1°15′	IR6W										•				•	○						•	○	
3	5	72.95	1°27′	IR5W										•				•	○						•	○	
3 1/4	5	79.3	1°17′	IR5W										•				•	○						•	○	

2 : Change the shim to AN16-2

2 : Change the shim to NXN22-2

2 : Change the shim to AN16-2DT

2 : Change the shim to GXN22-2DT

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

■ 30° trapezoidal thread (TR)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank														Carbide shank			“Tsuppari-Ichiban”							
				Insert size	16IR						22IR				27IR		16IR	16IR			22IR								
				Holder Cat. No.	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	CNR0040T16	CNR0050U16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	CNR0040T27	(CNR0050U27)	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	TSNR0020R22	TCNR0025S22DT	(TCNR0032T22DT)
				Insert Cat. No.																									
TR22×3	3	20.5	2°40′	IR30TR																									
TR24×5	5	21.5	4°14′	IR50TR																									
TR24×3	3	22.5	2°26′	IR30TR																									
TR26×5	5	23.5	3°52′	IR50TR																									
TR26×3	3	24.5	2°14′	IR30TR		○																							
TR28×5	5	25.5	3°34′	IR50TR																									
TR28×3	3	26.5	2°04′	IR30TR		•													○										
TR30×6	6	27	4°03′	IR60TR																									
TR30×3	3	28.5	1°55′	IR30TR		•													○										
TR32×6	6	29	3°46′	IR60TR																									
TR32×3	3	30.5	1°48′	IR30TR		•		2											•			2							
TR34×6	6	31	3°32′	IR60TR																									
TR34×3	3	32.5	1°41′	IR30TR		•		2											•			2							
TR36×6	6	33	3°19′	IR60TR																									
TR36×3	3	34.5	1°35′	IR30TR		•		2	2										•			2	2						
TR38×3	3	36.5	1°30′	IR30TR		•		2	2										•			2	2						
TR40×3	3	38.5	1°25′	IR30TR	•			•	○										○			•	○						
TR42×3	3	40.5	1°21′	IR30TR	•			•	○										○			•	○						
TR44×3	3	42.5	1°17′	IR30TR	•			•	•	○									○			•	•	○					
TR46×3	3	44.5	1°14′	IR30TR	•			•	•	○									○			•	•	○					
TR48×3	3	46.5	1°11′	IR30TR	•			•	•	○									○			•	•	○					
TR50×3	3	48.5	1°08′	IR30TR	•			•	•	○									○			•	•	○					
TR52×3	3	50.5	1°05′	IR30TR	•			•	•	•	○								○			•	•	○					
TR55×3	3	53.5	1°01′	IR30TR	•			•	•	•	○								○			•	•	○					
TR60×3	3	58.5	0°56′	IR30TR	•			•	•	•	○								○			•	•	○					

2 : Change the shim to AN16-2

2 : Change the shim to AN16-2DT

■ 30° trapezoidal thread (TR)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank			“Tsuppari-Ichiban”										
				Insert size	16IR						22IR						27IR			16IR			16IR			22IR				
				Holder Cat. No.	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	(CNR0040T22)	(CNR0050U22)	(CNR0063V22)	CNR0040T27	(CNR0050U27)	(CNR0063V27)	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	TSNR0020R22	TCNR0025S22DT
Insert Cat. No.																														
TR65×4	4	63	1°09′	IR40TR							•			•	•	•	○											•	•	○
TR70×4	4	68	1°04′	IR40TR							•			•	•	•	○											•	•	○
TR75×4	4	73	1°00′	IR40TR							•			•	•	•	○											•	•	○
TR80×4	4	78	0°56′	IR40TR							•			•	•	•	•	○										•	•	○
TR85×4	4	83	0°53′	IR40TR							•			•	•	•	•	○										•	•	○
TR90×4	4	88	0°50′	IR40TR							•			•	•	•	•	○										•	•	○
TR95×4	4	93	0°47′	IR40TR							•			•	•	•	•	○										•	•	○
TR100×4	4	98	0°45′	IR40TR							•			•	•	•	•	○										•	•	○
TR105×4	4	103	0°42′	IR40TR							•			•	•	•	•	○										•	•	○
TR110×4	4	108	0°41′	IR40TR							•			•	•	•	•	○										•	•	○
TR115×6	6	112	0°59′	IR60TR															•	•	○									
TR120×6	6	117	0°56′	IR60TR															•	•	○									
TR125×6	6	122	0°54′	IR60TR															•	•	○									
TR130×6	6	127	0°52′	IR60TR															•	•	○									
TR135×6	6	132	0°50′	IR60TR															•	•	○									
TR140×6	6	137	0°48′	IR60TR															•	•	○									
TR145×6	6	142	0°46′	IR60TR															•	•	○									
TR150×6	6	147	0°45′	IR60TR															•	•	○									
TR155×6	6	152	0°43′	IR60TR															•	•	○									
TR160×6	6	157	0°42′	IR60TR															•	•	○									
TR165×6	6	162	0°41′	IR60TR															•	•	○									
TR170×6	6	167	0°39′	IR60TR															•	•	○									

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Selection of ST-type Toolholders

Parallel pipe thread (G) This table is also applied to PF, Rp, and PS type threads.

Nominal size	TPI	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank								"Tsuppari-Ichiban"							
					Insert size	6IR		11IR			16IR					6IR		11IR			16IR			16IR									
					Holder Cat. No.	SNR0006H06-2	SNR0008H06-2	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	CNR0032S16	(CNR0040T16)	(CNR0050U16)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	
																																	Insert Cat. No.
G1/4	19	1.34	12.30	1°59'	IR19W	•	○										•		○														
G3/8	19	1.34	15.81	1°33'	IR19W	•	•			○							•		○														
G1/2	14	1.81	19.79	1°40'	IR14W					•			○										•			○							
G5/8	14	1.81	21.75	1°31'	IR14W					•			○										•			○							
G3/4	14	1.81	25.28	1°18'	IR14W				•		•		○										•		•		○			○			
G7/8	14	1.81	29.04	1°08'	IR14W				•		•		•		○								•		•		○			•	○		
G1	11	2.31	31.77	1°20'	IR11W							•			○											○			•		○		
G1-1/8	11	2.31	36.42	1°09'	IR11W							•			•	○										○			•		•	○	
G1-1/4	11	2.31	40.43	1°02'	IR11W							•			•	○										○			•		•	○	
G1-1/2	11	2.31	46.32	0°55'	IR11W							•			•	•	○									○			•		•	•	○
G1-3/4	11	2.31	52.27	0°48'	IR11W							•			•	•	•	○								○			•		•	•	○
G2	11	2.31	58.14	0°43'	IR11W							•			•	•	•	•	○							○			•		•	•	○
G2-1/4	11	2.31	64.23	0°39'	IR11W							•			•	•	•	•	•	○						○			•		•	•	○
G2-1/2	11	2.31	73.71	0°34'	IR11W							•			•	•	•	•	•	○						○			•		•	•	○
G2-3/4	11	2.31	80.06	0°32'	IR11W							•			•	•	•	•	•	○						○			•		•	•	○
G3	11	2.31	86.41	0°29'	IR11W										0	0	0	0	0	0											0	0	0
G3-1/2	11	2.31	98.85	0°26'	IR11W										0	0	0	0	0	0											0	0	0
G4	11	2.31	111.55	0°23'	IR11W										0	0	0	0	0	0											0	0	0
G4-1/2	11	2.31	124.25	0°20'	IR11W										0	0	0	0	0	0											0	0	0
G5	11	2.31	136.95	0°18'	IR11W										0	0	0	0	0	0											0	0	0
G6	11	2.31	162.35	0°16'	IR11W										0	0	0	0	0	0											0	0	0

0

: Change the shim to AN16-0

0

: Change the shim to AN16-0DT

○ : Change the shim to AN16-0

○ : Change the shim to AN16-0DT

Taper pipe thread (PT) This table is also applied to Rc type pipe thread.

Nominal size	TPI	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank										"Tsuppari-Ichiban"						
					Insert size	6IR				11IR				16IR				6IR				11IR				16IR		16IR						
					Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	CNR0032S16	(CNR0040T16)	(CNR0050U16)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)
					Insert Cat. No.																													
PT1/4	19	1.34	12.30	1°59'	IR19PT	○												○																
PT3/8	19	1.34	15.81	1°33'	IR19PT	•		○										•		○														
PT1/2	14	1.81	19.79	1°40'	IR14PT						○												•			○								
PT3/4	14	1.81	25.28	1°19'	IR14PT								○										•		•			○		○				
PT1	11	2.31	31.77	1°20'	IR11PT								•		○													○		•	○			
PT1 1/4	11	2.31	40.43	1°02'	IR11PT								•		•	○												○		•	•	○		
PT1 1/2	11	2.31	46.32	0°55'	IR11PT								•		•	•	○											○		•	•	•	○	
PT2	11	2.31	58.14	0°43'	IR11PT								•		•	•	•	○										○		•	•	•	○	
PT2 1/2	11	2.31	73.71	0°34'	IR11PT								•		•	•	•	•	○									○		•	•	•	○	
PT3	11	2.31	86.41	0°29'	IR11PT											0	0	0	0	○											0	0	○	
PT3 1/2	11	2.31	98.85	0°26'	IR11PT											0	0	0	0	○											0	0	○	
PT4	11	2.31	111.55	0°23'	IR11PT											0	0	0	0	○											0	0	○	
PT5	11	2.31	136.95	0°18'	IR11PT											0	0	0	0	○											0	0	○	
PT6	11	2.31	162.35	0°16'	IR11PT											0	0	0	0	○											0	0	○	
PT7	11	2.31	187.75	0°13'	IR11PT											0	0	0	0	○											0	0	○	
PT8	11	2.31	213.15	0°12'	IR11PT											0	0	0	0	○											0	0	○	
PT9	11	2.31	238.55	0°11'	IR11PT											0	0	0	0	○											0	0	○	
PT10	11	2.31	263.95	0°10'	IR11PT											0	0	0	0	○											0	0	○	
PT12	11	2.31	314.75	0°08'	IR11PT											0	0	0	0	○											0	0	○	

○ : Change the shim to AN16-0

○ : Change the shim to AN16-ODT

○ : Change the shim to AN16-0

○ : Change the shim to AN16-0DT

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

National taper pipe thread (NPT)

Nominal size	TPI	Pitch	Lead angle	Shank material	Steel shank										Carbide shank						"Tsuppari-Ichiban"						
				Insert size	6IR				16IR						6IR			16IR			16IR						
				Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	(CNR0040T16)	(CNR0050U16)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)
				Insert Cat. No.																							
3/8NPT	18	1.41	1°37′	IR18NPT	•		○									•		○									
1/2NPT	14	1.81	1°40′	IR14NPT																							
3/4NPT	14	1.81	1°19′	IR14NPT					○											○			○				
1NPT	11.5	2.21	1°17′	IR115NPT					○			○								○			•	○			
1 1/4NPT	11.5	2.21	1°00′	IR115NPT					○			•	•	○						○			•	•	•	○	
1 1/2NPT	11.5	2.21	0°52′	IR115NPT					○			•	•	○						○			•	•	•	○	
2NPT	11.5	2.21	0°41′	IR115NPT					○			•	•	•	•	○				○			•	•	•	○	
2 1/2NPT	8	3.175	0°50′	IR8NPT					○			•	•	•	•	○				○			•	•	•	○	
3NPT	8	3.175	0°40′	IR8NPT					○			•	•	•	•	○				○			•	•	•	○	
3 1/2NPT	8	3.175	0°35′	IR8NPT					○			•	•	•	•	○				○			•	•	•	○	
4NPT	8	3.175	0°31′	IR8NPT					○			•	•	•	•	○				○			•	•	•	○	
5NPT	8	3.175	0°25′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
6NPT	8	3.175	0°21′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
8NPT	8	3.175	0°16′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
10NPT	8	3.175	0°13′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
12NPT	8	3.175	0°11′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
14NPT	8	3.175	0°10′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
16NPT	8	3.175	0°09′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
18NPT	8	3.175	0°08′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
20NPT	8	3.175	0°07′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	
24NPT	8	3.175	0°06′	IR8NPT								0	0	0	0	<u>0</u>								0	0	<u>0</u>	

○ : Change the shim to AN16-0

○ : Change the shim to AN16-ODT

29° trapezoidal thread (ACME)

Nominal size	TPI	Pitch	Pitch diameter	Lead angle	Shank material	Steel shank												Carbide shank			“Tsuppari-Ichiban”					
					Insert size	16IR						22IR						27IR		16IR			16IR		22IR	
					Holder Cat. No.		SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	CNR0040T27	(CNR0050U27)	SNR0016R16SC	SNR0016R16SC-2	SNR0016R16SC-3	TSNR0016Q16	TCNR0020R16DT	TCNR0025S22DT	(TCNR0032T22DT)
					Insert Cat. No.																					
3/8	12	2.12	8.465	4°33´	IR12ACME																					
7/16	12	2.12	10.053	3°50´	IR12ACME																					
1/2	10	2.54	11.43	4°03´	IR10ACME																					
5/8	8	3.18	14.274	4°03´	IR8ACME																					
3/4	6	4.23	16.934	4°33´	IR6ACME																					
7/8	6	4.23	20.109	3°50´	IR6ACME																					
1	5	5.08	22.86	4°03´	IR5ACME																					
1-1/8	5	5.08	26.035	3°33´	IR5ACME																					
1-1/4	5	5.08	29.21	3°10´	IR5ACME																					
1-3/8	4	6.35	31.75	3°39´	IR4ACME																					
1-1/2	4	6.35	34.925	3°19´	IR4ACME																					
1-3/4	4	6.35	41.275	2°48´	IR4ACME																					
2	4	6.35	47.625	2°26´	IR4ACME																					

Because this thread standard is characterized with large pitch and small diameter, (that is a large lead angle) the standard inserts and toolholders can not be used for machining this thread type. The application is limited to outside of the standard.

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Threading guidelines




Determine the infeed per pass and number of threads while referring to the table and description below.

Pitch (mm)	0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5 ~
TPI	48	32	24	20	16	14	12	10	8	7	6	5.5	5 ~
No. of passes	4 ~ 6	4 ~ 7	4 ~ 8	5 ~ 9	6 ~ 10	7 ~ 12	7 ~ 12	8 ~ 14	10 ~ 16	11 ~ 18	11 ~ 18	11 ~ 19	12 ~ 24

Note:

- When using the full-profile insert, set the total infeed amount by taking the finish stock of 0.1mm into account.
- Set the first infeed to 150 ~ 200% of nose R and do not allow it to exceed 0.5 mm.
- The infeed amount during the final pass must be a minimum of 0.05 mm. No zero cuts should be made. (Extra small infeed or zero cutting of work hardened surfaces will reduce tool life.)
- The partial-profile insert or inside diameter insert has small nose R. Reduce the infeed per pass and increase the no. of passes.
- Regarding standard infeed per passes and no. of passes, please refer to our catalog.

Infeed methods for threading tools

Infeed method	Features
 Straight infeed (radial infeed)	• Most simple and typical method Suitable for relatively small pitch threads of easily machinable material. • Chip contact length on right and left is longer, causing chattering, with increased load on the nose end. • When the half included angle is not symmetrical to the right and left, infeeding in the direction of 1/2 of the included angle will ensure equal machining with right and left cutting edges.
 Single edge infeed (flank infeed)	• Suitable for large pitch threads or easy to tear materials. Effectively prevents chattering. • Chips are discharged in one direction only. Satisfactory chip control. • Edge on the right (with zero infeed) tends to be worn heavily.
 Modified single-edge infeed (flank infeed)	• Suitable for large pitch threads or easy to tear materials. Effectively prevents chattering. • Chips are discharged in one direction only. Satisfactory chip control. • Edge on the right tends to be worn heavily.
 Alternating flank infeed	• Suitable for large pitch threads or easy to tear material. Effectively prevents chattering. • Chips are discharged alternately in right and left directions, resulting in possible entanglement. • Right and left edges are used alternately, ensuring uniform wear and extending tool life.

Infeed per Pass and Number of Passes

ISO metric full-profile inserts (for external)

Pitch	0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5	5.5	6
Height of thread	0.32	0.47	0.63	0.79	0.95	1.11	1.27	1.58	1.9	2.21	2.53	2.85	3.16	3.48	3.8
Total depth of cut	0.42	0.57	0.73	0.89	1.05	1.21	1.37	1.68	2	2.31	2.63	2.95	3.26	3.58	3.9
Number of passes	1	0.15	0.18	0.25	0.25	0.3	0.3	0.3	0.35	0.35	0.4	0.4	0.45	0.5	0.5
	2	0.12	0.12	0.2	0.2	0.25	0.25	0.25	0.3	0.3	0.35	0.35	0.35	0.35	0.4
	3	0.1	0.12	0.13	0.15	0.2	0.2	0.2	0.25	0.25	0.3	0.3	0.3	0.3	0.3
	4	0.05	0.1	0.1	0.14	0.15	0.16	0.2	0.23	0.2	0.25	0.25	0.25	0.25	0.25
	5		0.05	0.05	0.1	0.1	0.15	0.15	0.2	0.2	0.21	0.2	0.2	0.25	0.23
	6				0.05	0.05	0.1	0.12	0.15	0.15	0.2	0.2	0.2	0.2	0.2
	7						0.05	0.1	0.15	0.15	0.15	0.15	0.2	0.2	0.2
	8							0.05	0.1	0.15	0.15	0.15	0.15	0.18	0.15
	9								0.05	0.1	0.15	0.15	0.15	0.15	0.15
	10									0.1	0.1	0.13	0.15	0.15	0.15
	11									0.05	0.1	0.1	0.15	0.13	0.15
	12										0.05	0.1	0.1	0.1	0.15
	13											0.1	0.1	0.1	0.15
	14											0.05	0.1	0.1	0.1
	15												0.1	0.1	0.1
	16												0.05	0.1	0.1
	17													0.1	0.1
	18													0.05	0.1
	19														0.1
	20														0.05
	21														0.1
	22														0.05
	23														
	24														

ISO metric full-profile inserts (for internal)

Pitch	0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5	5.5	6
Height of thread	0.29	0.43	0.58	0.72	0.87	1.01	1.16	1.45	1.74	2.03	2.32	2.61	2.9	3.19	3.48
Total depth of cut	0.39	0.53	0.68	0.82	0.97	1.11	1.26	1.55	1.84	2.13	2.42	2.71	3	3.29	3.58
Number of passes	1	0.08	0.1	0.14	0.15	0.2	0.2	0.2	0.25	0.25	0.3	0.3	0.35	0.35	0.4
	2	0.07	0.09	0.13	0.13	0.16	0.18	0.22	0.22	0.25	0.25	0.25	0.25	0.25	0.25
	3	0.07	0.08	0.11	0.12	0.14	0.16	0.17	0.2	0.2	0.22	0.22	0.22	0.22	0.22
	4	0.06	0.08	0.1	0.11	0.12	0.14	0.16	0.18	0.18	0.2	0.2	0.2	0.2	0.2
	5	0.06	0.07	0.08	0.1	0.12	0.12	0.14	0.16	0.16	0.18	0.18	0.18	0.2	0.19
	6	0.05	0.06	0.07	0.09	0.1	0.1	0.12	0.15	0.15	0.16	0.18	0.18	0.18	0.18
	7		0.05	0.05	0.07	0.08	0.09	0.1	0.1	0.14	0.14	0.16	0.16	0.16	0.17
	8				0.05	0.05	0.07	0.08	0.1	0.13	0.13	0.14	0.14	0.14	0.16
	9						0.05	0.06	0.08	0.12	0.12	0.14	0.14	0.14	0.15
	10							0.05	0.06	0.1	0.11	0.12	0.12	0.13	0.14
	11								0.05	0.08	0.1	0.12	0.12	0.13	0.14
	12									0.06	0.1	0.1	0.12	0.12	0.13
	13									0.05	0.07	0.1	0.11	0.12	0.13
	14										0.05	0.09	0.1	0.12	0.13
	15											0.07	0.1	0.11	0.12
	16											0.05	0.09	0.1	0.12
	17												0.08	0.1	0.1
	18												0.05	0.1	0.1
	19													0.08	0.1
	20													0.05	0.1
	21														0.08
	22														0.05
	23														0.08
	24														0.05

Unified full-profile inserts

	For external								For internal							
	TPI	24	20	18	16	14	12	8	24	20	18	16	14	12	8	
	Height of thread	0.67	0.8	0.89	1.01	1.15	1.34	2.01	0.61	0.74	0.82	0.92	1.05	1.23	1.84	
	Total depth of cut	0.77	0.9	0.99	1.11	1.25	1.44	2.11	0.71	0.84	0.92	1.02	1.15	1.33	1.94	
Number of passes	1	0.25	0.25	0.28	0.3	0.3	0.3	0.35	0.2	0.2	0.2	0.2	0.25	0.25	0.3	
	2	0.22	0.2	0.23	0.25	0.25	0.25	0.3	0.16	0.16	0.18	0.18	0.2	0.2	0.25	
	3	0.15	0.16	0.18	0.18	0.23	0.21	0.25	0.12	0.13	0.15	0.16	0.18	0.18	0.22	
	4	0.1	0.14	0.15	0.15	0.18	0.18	0.22	0.1	0.12	0.14	0.14	0.16	0.16	0.2	
	5	0.05	0.1	0.1	0.1	0.14	0.15	0.2	0.08	0.1	0.1	0.11	0.13	0.13	0.18	
	6		0.05	0.05	0.08	0.1	0.12	0.2	0.05	0.08	0.1	0.1	0.1	0.1	0.16	
	7				0.05	0.05	0.1	0.16		0.05	0.05	0.08	0.08	0.1	0.14	
	8						0.08	0.16				0.05	0.05	0.08	0.12	
	9						0.05	0.12						0.08	0.12	
	10							0.1						0.05	0.1	
	11							0.05							0.1	
	12															0.05
	13															
	14															

Whitworth full-profile inserts

	For external								For internal							
	TPI	20	19	18	16	14	12	11	10	8	20	19	18	16	14	12
	Height of thread	0.83	0.88	0.92	1.04	1.19	1.39	1.51	1.66	2.08	0.83	0.88	0.92	1.04	1.19	1.39
	Total depth of cut	0.93	0.98	1.02	1.14	1.29	1.49	1.61	1.76	2.18	0.93	0.98	1.02	1.14	1.29	1.49
Number of passes	1	0.25	0.28	0.3	0.3	0.3	0.3	0.3	0.35	0.35	0.2	0.2	0.22	0.22	0.25	0.25
	2	0.2	0.22	0.24	0.25	0.25	0.25	0.25	0.3	0.3	0.18	0.18	0.18	0.18	0.21	0.21
	3	0.18	0.18	0.18	0.18	0.23	0.2	0.2	0.23	0.25	0.16	0.16	0.17	0.17	0.2	0.2
	4	0.15	0.15	0.15	0.14	0.2	0.18	0.18	0.2	0.23	0.14	0.16	0.16	0.16	0.18	0.18
	5	0.1	0.1	0.1	0.12	0.16	0.15	0.15	0.15	0.22	0.12	0.13	0.14	0.14	0.16	0.16
	6	0.05	0.05	0.05	0.1	0.1	0.14	0.14	0.14	0.2	0.08	0.1	0.1	0.12	0.14	0.14
	7				0.05	0.05	0.12	0.12	0.12	0.18	0.05	0.05	0.05	0.1	0.1	0.1
	8						0.1	0.12	0.12	0.16			0.05	0.05	0.1	0.1
	9						0.05	0.1	0.1	0.14					0.1	0.1
	10							0.05	0.05	0.1					0.05	0.1
	11								0.05						0.05	0.1
	12															0.05
	13															
	14															
	15															

30° Trapezoidal (TR) inserts

		For external					For internal				
		2	3	4	5	6	2	3	4	5	6
Pitch		2	3	4	5	6	2	3	4	5	6
Height of thread		1.25	1.75	2.25	2.75	3.5	1.25	1.75	2.25	2.75	3.5
Total depth of cut		1.35	1.85	2.35	2.85	3.6	1.35	1.85	2.35	2.85	3.6
Number of passes	1	0.25	0.25	0.3	0.3	0.3	0.2	0.22	0.25	0.25	0.25
	2	0.2	0.22	0.25	0.25	0.25	0.18	0.2	0.22	0.22	0.22
	3	0.2	0.2	0.22	0.2	0.23	0.18	0.18	0.2	0.2	0.21
	4	0.18	0.18	0.2	0.2	0.2	0.16	0.16	0.2	0.18	0.2
	5	0.15	0.17	0.18	0.18	0.18	0.15	0.16	0.17	0.18	0.18
	6	0.12	0.16	0.16	0.16	0.18	0.13	0.16	0.16	0.16	0.18
	7	0.1	0.14	0.15	0.16	0.16	0.1	0.14	0.16	0.16	0.16
	8	0.1	0.14	0.14	0.15	0.16	0.1	0.14	0.14	0.15	0.16
	9	0.05	0.12	0.14	0.14	0.16	0.1	0.12	0.14	0.14	0.16
	10		0.12	0.12	0.14	0.16	0.05	0.12	0.12	0.14	0.16
	11		0.1	0.12	0.14	0.16		0.1	0.12	0.14	0.16
	12		0.05	0.12	0.12	0.15		0.1	0.12	0.12	0.15
	13			0.1	0.12	0.15		0.05	0.1	0.12	0.15
	14			0.1	0.12	0.15			0.1	0.12	0.15
	15			0.05	0.12	0.14			0.1	0.12	0.14
	16				0.1	0.14			0.05	0.1	0.14
	17				0.1	0.12				0.1	0.12
	18				0.1	0.12				0.1	0.12
	19				0.05	0.12				0.1	0.12
	20					0.12				0.05	0.12
	21					0.1					0.1
	22					0.1					0.1
	23					0.05					0.1
	24										0.05
	25										
	26										

29° Trapezoidal (TR) inserts

		For external			For internal		
		8	6	5	8	6	5
TPI		8	6	5	8	6	5
Height of thread		1.88	2.41	2.92	1.88	2.41	2.92
Total depth of cut		1.98	2.51	3.02	1.98	2.51	3.02
Number of passes	1	0.25	0.25	0.25	0.22	0.22	0.22
	2	0.22	0.22	0.22	0.2	0.2	0.2
	3	0.2	0.2	0.2	0.18	0.18	0.18
	4	0.18	0.18	0.18	0.16	0.18	0.18
	5	0.16	0.17	0.18	0.16	0.16	0.16
	6	0.16	0.16	0.16	0.16	0.15	0.16
	7	0.16	0.16	0.16	0.15	0.15	0.15
	8	0.14	0.14	0.14	0.14	0.14	0.14
	9	0.14	0.14	0.14	0.14	0.14	0.14
	10	0.12	0.14	0.14	0.12	0.14	0.14
	11	0.1	0.14	0.14	0.1	0.14	0.14
	12	0.1	0.12	0.14	0.1	0.12	0.14
	13	0.05	0.12	0.12	0.1	0.12	0.12
	14		0.12	0.12	0.05	0.12	0.12
	15		0.1	0.12		0.1	0.12
	16		0.1	0.12		0.1	0.12
	17		0.05	0.12		0.1	0.12
	18			0.12		0.05	0.12
	19			0.1			0.1
	20			0.1			0.1
	21			0.05			0.1
	22						0.05
	23						
	24						
	25						
	26						

PT full-profile inserts

		For external				For internal		
		28	19	14	11	19	14	11
TPI		28	19	14	11	19	14	11
Height of thread		0.6	0.86	1.16	1.48	0.86	1.16	1.48
Total depth of cut		0.7	0.96	1.26	1.58	0.96	1.26	1.58
Number of passes	1	0.25	0.28	0.3	0.3	0.22	0.25	0.25
	2	0.2	0.2	0.25	0.25	0.2	0.22	0.22
	3	0.1	0.18	0.2	0.22	0.18	0.18	0.18
	4	0.1	0.15	0.15	0.18	0.16	0.14	0.18
	5	0.05	0.1	0.11	0.15	0.1	0.12	0.15
	6		0.05	0.1	0.12	0.05	0.1	0.13
	7			0.1	0.11	0.05	0.1	0.12
	8			0.05	0.1		0.1	0.1
	9				0.1		0.05	0.1
	10				0.05			0.1
	11							0.05
	12							
	13							
	14							
	15							
	16							
	17							
	18							
	19							
	20							
	21							
	22							
	23							
	24							
	25							
	26							

NPT full-profile inserts


		For external				For internal		
		18	14	11.5	8	14	11.5	8
TPI		18	14	11.5	8	14	11.5	8
Height of thread		1.14	1.47	1.79	2.58	1.47	1.79	2.58
Total depth of cut		1.24	1.57	1.89	2.68	1.57	1.89	2.68
Number of passes	1	0.2	0.25	0.25	0.3	0.22	0.22	0.25
	2	0.18	0.22	0.22	0.25	0.2	0.2	0.2
	3	0.17	0.2	0.2	0.2	0.18	0.18	0.2
	4	0.16	0.18	0.18	0.2	0.18	0.18	0.2
	5	0.14	0.17	0.18	0.2	0.16	0.16	0.2
	6	0.12	0.16	0.17	0.2	0.14	0.16	0.2
	7	0.12	0.12	0.16	0.18	0.12	0.16	0.18
	8	0.1	0.12	0.14	0.18	0.12	0.14	0.18
	9	0.05	0.1	0.12	0.16	0.1	0.12	0.16
	10		0.05	0.12	0.16	0.1	0.12	0.16
	11			0.1	0.14	0.05	0.1	0.14
	12			0.05	0.14		0.1	0.14
	13				0.12		0.05	0.12
	14				0.1			0.1
	15				0.1			0.1
	16				0.05			0.1
	17							0.05
	18							
	19							
	20							
	21							
	22							
	23							
	24							
	25							
	26							



Wide selections for API and ANSI/ASME threads



For API Buttress and API Round (3 edged, single-sided inserts)

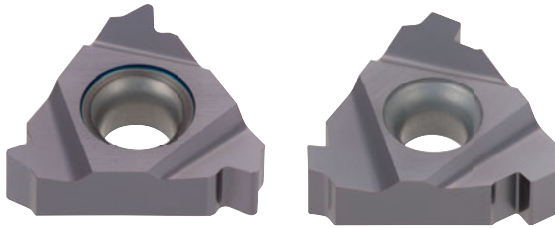

16*R*API, 22*R5BAPI


Laydown style, without chipbreaker - See page 19



16*R*RD-CB

Laydown style, without chipbreaker - See page 19

Laydown style, large insert for enhanced stability




L535B**-FC**


Laydown style, without chipbreaker - See page 46

6-edged, double-sided insert ideal for threading API drill pipes

One insert can be used for both internal and external threading with reduced tool cost and inventory.



Right-hand, OD threading (See pages 47 and 48)




Right-hand, ID threading (See page 48)



MTVNR/L-5

"TungThread" External threading toolholders for laydown inserts

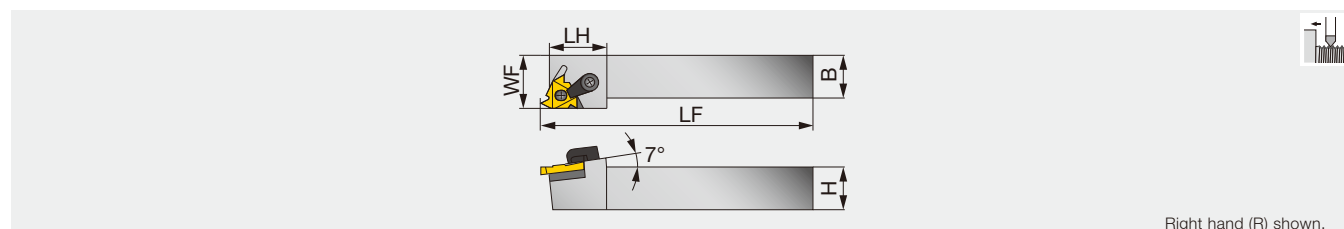

Right hand (R) shown.

Designation	B	H	LF	LH	WF	Insert
MTVNR-2525M5	25	25	152	39	31.8	L535B**EXT-FC
MTVNR-3232M5	32	32	178	39	38.1	L535B**EXT-FC


SPARE PARTS

Designation	Shim	Lock pin	Clamp	Clamping screw	Wrench
MTVNR...	LS53NOFORMEXT	NL-58	TC-250	STC-11	1/8HEX



HS-LNFR-53

Exchangeable internal threading heads for laydown inserts

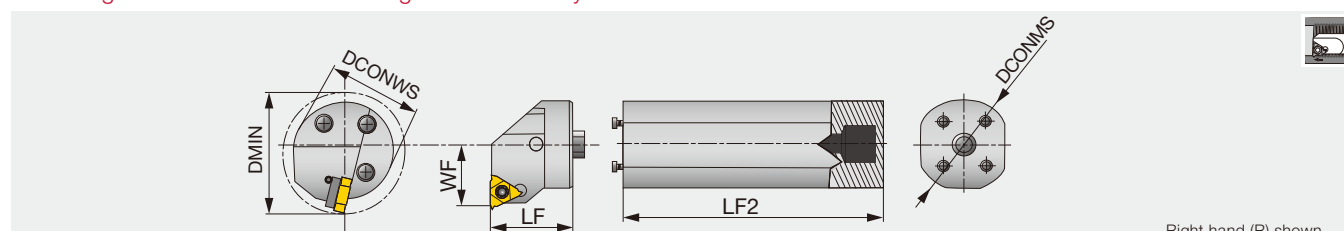

Right hand (R) shown.

Designation	DMIN	DCONWS	WF	LF	Insert
HS40-LNFR-53	50	40	28.7	41.3	L535B**INT-FC
HS50-LNFR-53	63	50	32.7	41.3	L535B**INT-FC

SPARE PARTS

Designation	Lock pin	Clamp	Clamping screw	Wrench
HS**-LNFR-53	NL-56	TC-250	STC-11	1/8HEX


Shank

Designation	DCONMS	LF2
S-570-40M-40	40	273
S-570-50M-50	50	366

SPARE PARTS

Designation	Clamping screw	Wrench
S-570-40M-40	SS100	5/32HEX
S-570-50M-50	SS94	1/4EX

Full-profile inserts (Single-sided)




Connection	TPI	Taper		External insert				Internal insert			
		mm/mm	TPF	Designation	Grades	IC	S	Designation	Grades	IC	S
					Coating				Coating		
					AH725				AH725		
API Buttress	5	1/16	0.75	L535B75EXT-FC	●	15.875	4.8	L535B75INT-FC	●	15.875	4.8
	5	1/12	1	L535B1EXT-FC	●	15.875	4.8	L535B1INT-FC	●	15.875	4.8

● : Line-up



MTVNR-54

External threading toolholder for laydown double-side inserts

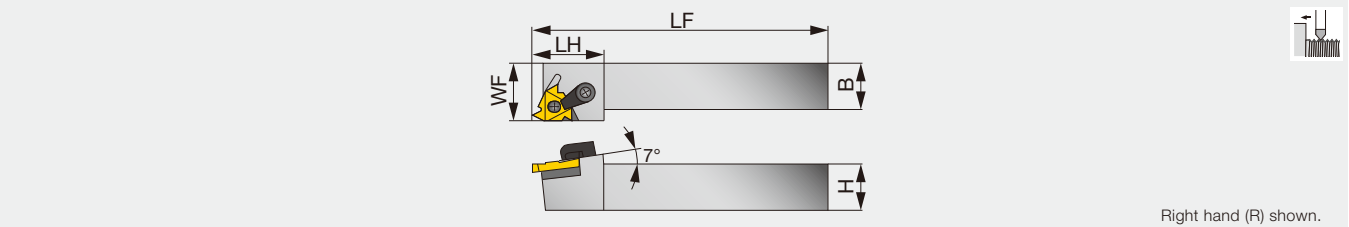


Right hand (R) shown.

Designation	H	B	LF	LH	WF	Insert
MTVNR-3232M54	32	32	178	39	38.1	LDS54**FT-CB#...

SPARE PARTS

Designation	Shim	Lock pin	Clamp	Clamping screw	Wrench
MTVNR-3232M54	LS53NOFORMEXT	NL-58	TC-250	STC-11	1/8HEX

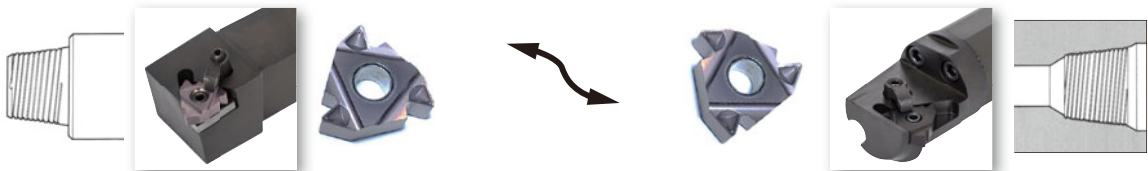


External tool, Right hand

Internal tool, Right hand

HS-LNFR/L-54API

Exchangeable internal threading heads for laydown double-side inserts

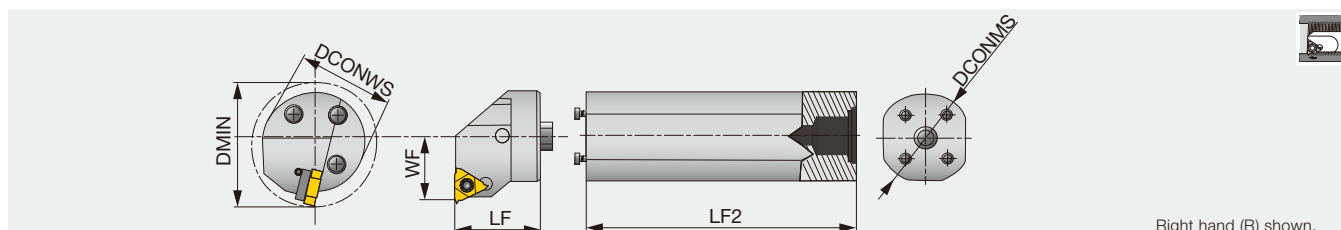

Designation	DMIN	DCONWS	WF	LF	Insert
HS40-LNFR-54API	50	40	27	32	LDS54**FT-CB#...
HS50-LNFR-54API	63	50	35	40	LDS54**FT-CB#...

SPARE PARTS

Designation	Lock pin	Clamp	Clamping screw	Wrench
HS40-LNFR-54API	H410-1	TC-250	STC-11	1/8HEX
HS50-LNFR-54API	NL-56	TC-250	STC-11	1/8HEX


Shank

Designation	DCONMS	LF2
S-570-40M-40	40	273
S-570-50M-50	50	366

SPARE PARTS

Designation	Clamping screw	Wrench
S-570-40M-40	SS100	5/32HEX
S-570-50M-50	SS94	1/4EX

Full-profile inserts (Double-sided)

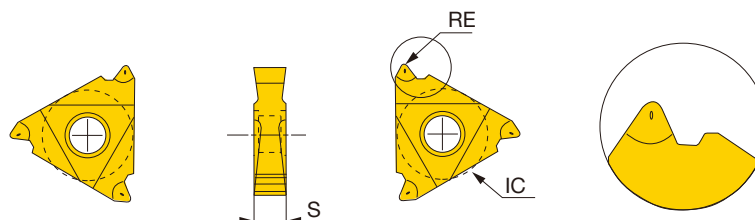


Connection	TPI	Thread form	Taper		Designation	Grade	IC	S	RE
			mm/mm	TPF		Coating			
API Rotary shoulder connection	4	V-0.038R	1/6	2	LDS54428FT-CB #1	●	15.875	6.4	0.97
	4	V-0.038R	1/4	3	LDS54438FT-CB #2	●	15.875	6.4	0.97
	4	V-0.050	1/6	2	LDS54425FT-CB #3	●	15.875	6.4	0.64
	4	V-0.050	1/4	3	LDS54435FT-CB #4	●	15.875	6.4	0.64
	5	V-0.040	1/4	3	LDS54530FT-CB #5	●	15.875	6.4	0.51

● : Line-up

Wide selections for various threading needs

DUOJ^{UST}CUT



Ideal for threading
high thread pitches

Thread pitch (mm)	PDX (mm)
0.2 ~ 0.4	0.25
0.4 ~ 1	0.6
1 ~ 1.5	1.25

See page 56



TETRAM^{MC}CUT



First-choice tools

Thread pitch (mm)	PDX (mm)
0.4 ~ 1	0.6
1 ~ 2	1
0.8 ~ 3	1.6

See page 50



J-SERIES

Complementary tool



See page 62

TUNGTHREAD

For threading different types of
threads with one tool



See page 22

TETRAMCUT




Expand full **profile (ISO metric)** with highly rigid clamping insert clamping

TETRAMCUT


Unique 3-point clamping system

The unique pocket design provides accurate indexing repeatability of the cutting edge height.

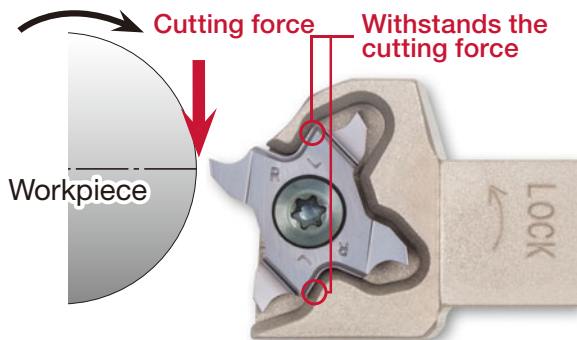


The insert pocket protects all unused cutting edges


Strong and stable clamping design protects unused insert corners from damage during operation.

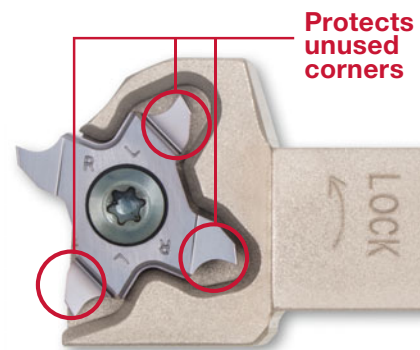


For external threading in Swiss machines

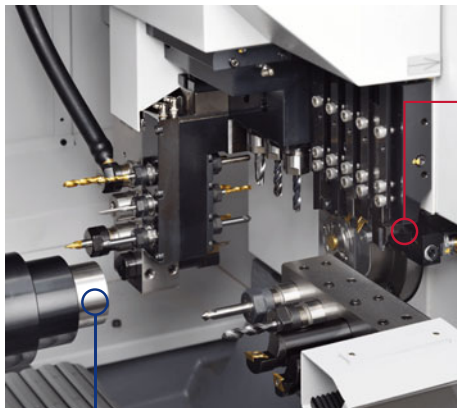

Machining on main spindle



Machining on sub spindle



Threading and grooving insert fit the same tool holder

Threading insert
(First choice)
Max thread pitch: 3 mm
New • ISO metric pitch :
1.0, 1.25, 1.5 mm



Threading insert
(sharp edge)
Max thread pitch: 2 mm
New • ISO metric pitch :
0.5, 0.7, 0.75, 0.8 mm




Grooving insert
Max grooving width: 3 mm




No tool interference with the lathe center when machining small parts

TETRAMCUT
M16x1

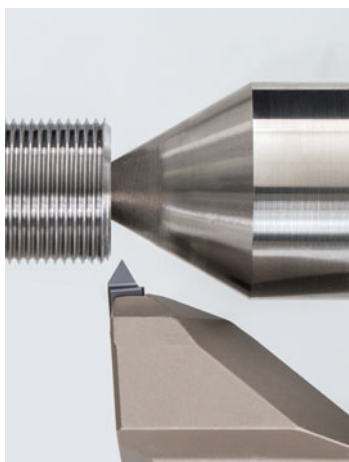

Insert : TCT18R-60N-020

M24x1

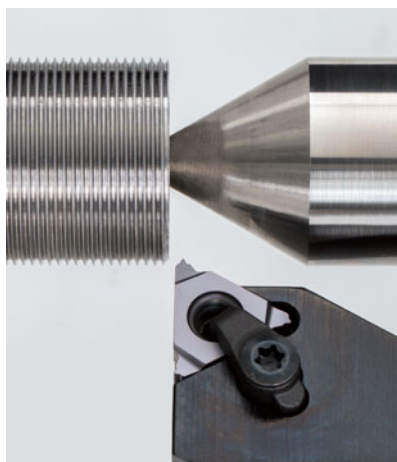


Insert : 16ER10ISO

TETRAMCUT

STCR/L-18

External threading tool holder for 4 cornered inserts

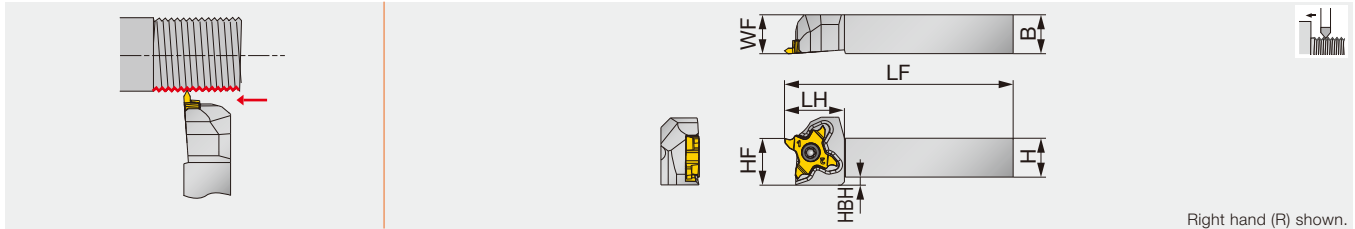

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	HBH	Insert
STCR/L1010X18	10	10	120	18.5	10	10	4.5	TC*18...
STCR/L1212F18	12	12	85	18.5	12	12	2.5	TC*18...
STCR/L1212X18	12	12	120	18.5	12	12	2.5	TC*18...
STCR/L1616X18	16	16	120	18.5	16	16	-	TC*18...
STCR/L2020H18	20	20	100	18.5	20	20	-	TC*18...
STCR/L2020X18	20	20	120	23	20	25	-	TC*18...
STCR/L2525Z18	25	25	135	23	25	30	-	TC*18...

- This holder accommodates either a threading or grooving insert
- The right hand insert (TCT18R...) is used for the right hand toolholders (STCR...), and the left hand insert (TCL18...) is used for the left hand toolholders (STCL...).


SPARE PARTS

Designation	Clamping screw	Wrench
STCR...	CSTC-4L100DL	T-1008/5
STCL...	CSTC-4L100DR	T-1008/5

TETRAMCUT

TetraMini-Cut STCR/L-18

External grooving and threading toolholder, high pressure coolant compatible

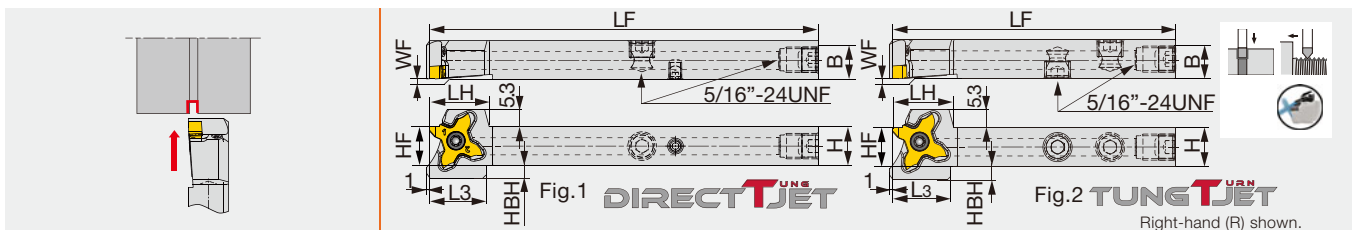

Right-hand (R) shown.

Designation	H	B	LF	LH	L3	HF	WF	HBH	Fig.	Insert	Torque*
STCR/L1212F18-CHP	12	12	85	18.5	17.5	12	0/12	4	2	TC*18...	1.2
STCR/L1212X18-CHP	12	12	120	18.5	17.5	12	0/12	4	1	TC*18...	1.2
STCR/L1616X18-CHP	16	16	120	18.5	-	16	0/16	0	1	TC*18...	1.2

- This holder accommodates either a threading or grooving insert
- The right hand insert (TCT18R...) is used for the right hand toolholders (STCR...), and the left hand insert (TCL18...) is used for the left hand toolholders (STCL...).

SPARE PARTS


Designation	Clamping screw	Wrench
STCL**18-CHP	CSTC-4L100DR	T-1008/5
STCR**18-CHP	CSTC-4L100DL	T-1008/5

Groove width range : 0.33 - 3.0 mm
Threading pitch range : 0.8 - 3.0 mm

TETRAMCUT

JS-STCL18

Internal threading tool holder for 4 cornered inserts

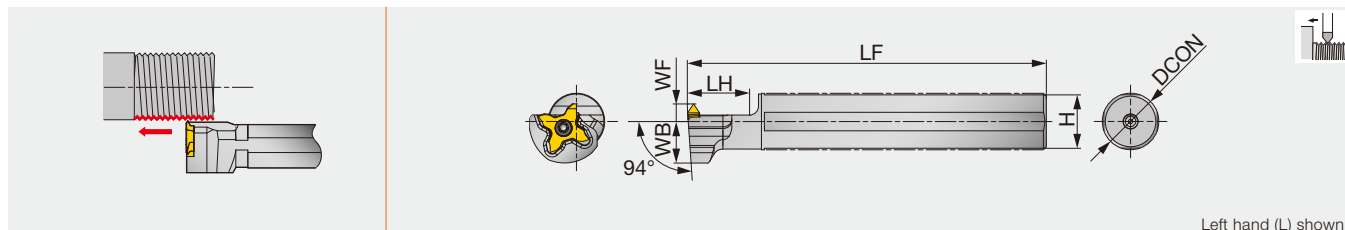

Designation	DCON	LF	LH	H	WB	WF	Insert
JS14H-STCL18	14	100	20	13	14	6	TC*18R...
JS159F-STCL18	15.875	85	20	15	14	6	TC*18R...
JS16F-STCL18	16	85	20	15	14	6	TC*18R...
JS19G-STCL18	19.05	90	20	18	14	6	TC*18R...
JS19X-STCL18	19.05	120	20	18	14	6	TC*18R...
JS20G-STCL18	20	90	20	19	14	6	TC*18R...
JS20X-STCL18	20	120	20	19	14	6	TC*18R...
JS22X-STCL18	22	120	20	21	12.25	10	TC*18R...
JS25H-STCL18	25	100	20	24	12.25	10	TC*18R...
JS254X-STCL18	25.4	120	20	24	12.25	10	TC*18R...

- The right hand insert (TCT18R...) is used for the left hand toolholders (STCL...)

SPARE PARTS




Designation	Clamping screw	Wrench
JS**STCL18	CSTC-4L100DL	T-1008/5

New

ISO metric

TCT18FR/R-ISO (Full profile inserts)

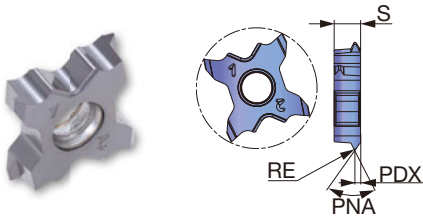


Designation	Edge preparation	Grade				Dimensions (mm)				
		SH725		AH725		pitch	PDX	RE	PNA	S
TCT18FR-05ISO	Sharp	★				0.5	0.35	0.06	60°	4
TCT18FR-07ISO	Sharp	★				0.7	0.45	0.09	60°	4
TCT18FR-075ISO	Sharp	★				0.75	0.50	0.09	60°	4
TCT18FR-08ISO	Sharp	★				0.8	0.50	0.10	60°	4
TCT18R-10ISO	Lightly honed			★		1.0	0.60	0.13	60°	4
TCT18R-125ISO	Lightly honed			★		1.25	0.70	0.17	60°	4
TCT18R-15ISO	Lightly honed			★		1.5	0.80	0.20	60°	4

Package quantity = 5pcs.

★ : To be released in summer 2019

60° thread angle

TCT18FR/R/L (Threading)

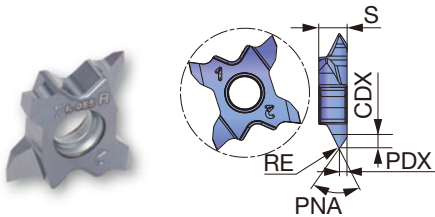

Designation	Edge preparation	Grade				Dimensions (mm)					
		SH725		AH725		pitch min	pitch max	PDX	CDX	RE	PNA
TCT18FR-60A-005	Sharp	●				0.4	1	0.6	0.99	0.05	60°
TCT18FR-60A-010	Sharp	●				1	2	1	1.63	0.1	60°
TCT18R/L-60N-010	Lightly honed		●	●		0.8	3	1.6	2.67	0.1	60°
TCT18R/L-60N-020	Lightly honed		●	●		1.5	3	1.6	2.57	0.2	60°

Package quantity = 5pcs.

● : Line up

STANDARD CUTTING CONDITIONS

TCT18R/L / TCT18FR (sharp edge)

ISO	Workpiece materials	Priority	Grades	Cutting speed Vc (m/min)	Pitch (mm)	TPI
P	Low carbon steel (S15C / C15, S20C / C20, etc.)	First choice	SH725	60 - 150	0.4 - 2.0	64 - 18
		Toughness	AH725	60 - 150	0.8 - 3.0	32 - 8
	Carbon steels, Alloy steel (S55C / C55, SCM440 / 42CrMoS4, etc.)	First choice	SH725	60 - 150	0.4 - 2.0	64 - 18
		Toughness	AH725	60 - 150	0.8 - 3.0	32 - 8
M	Prehardened steel (NAK80, PX5, etc.)	First choice	SH725	60 - 150	0.4 - 2.0	64 - 18
		Toughness	AH725	60 - 150	0.8 - 3.0	32 - 8
	Stainless steel (SUS304 / X5CrNi18-9, X5CrNiMo17-12-2, etc.)	First choice	SH725	50 - 80	0.4 - 2.0	64 - 18
		Toughness	AH725	50 - 80	0.8 - 3.0	32 - 8
K	Grey cast iron (FC250 / GG25 / 250, FC300 / GG30 / 300, etc.)	First choice	AH725	50 - 100	0.8 - 3.0	32 - 8
		Sharpness	SH725	50 - 100	0.4 - 2.0	64 - 18
	Ductile cast iron (FCD400 / 400-15, FCD600 / 600-3, etc.)	First choice	AH725	50 - 100	0.8 - 3.0	32 - 8
		Sharpness	SH725	50 - 100	0.4 - 2.0	64 - 18
S	Titanium alloys (Ti-6Al-4V, etc.)	First choice	SH725	30 - 100	0.4 - 2.0	64 - 18
		Toughness	AH725	30 - 100	0.8 - 3.0	32 - 8
	Superalloys (Inconel718, etc.)	First choice	SH725	30 - 100	0.4 - 2.0	64 - 18
		Toughness	AH725	30 - 100	0.8 - 3.0	32 - 8

DUO^{UST}JCUT




Double cornered insert with high rigidity clamping
for various threading operations in Swiss machines









Unique clamping method enhances insert rigidity during machining


DuoJustCut's tool holder is designed to protect unused cutting edge from damage during machining. Even if the first cutting edge is fractured, the other cutting edge can be used thanks to its unique insert clamping method.

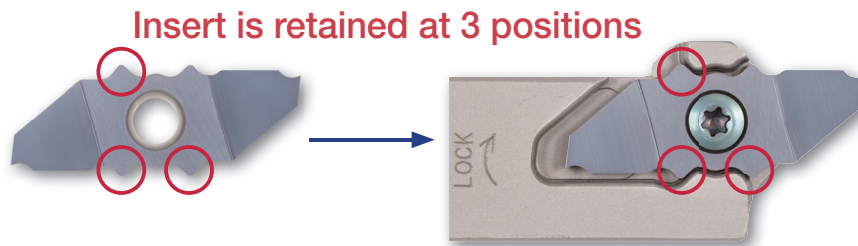

Smart tool design eliminates difficult-to-reach areas on small parts


Allows threading all the way to the flange, making it ideal for threading small size screws.

	Type A	Type B	Type N
Right hand	 $a > b$	 $a < b$	 $a = b$
Left hand	 $a > b$	 $a < b$	 $a = b$



Insert description	Corner radius (mm)	PDX (mm)	Thread pitch (mm)											
			0.2	0.25	0.35	0.4	0.5	0.6	0.8	1	1.25	1.5		
JXTG12FR-60A-000	0.05(Flat)	0.25	Applicable range											
JXTG12FL-60A-000														
JXTG12FR-60B-000	0.05(Flat)	2.25	Applicable range											
JXTG12FL-60B-000														
JXTG12FR-60A-005	R0.05	0.6					Applicable range							
JXTG12FL-60A-005														
JXTG12FR-60B-005	R0.05	1.9					Applicable range							
JXTG12FL-60B-005														
JXTG12FR-60N-010	R0.1	1.25									Applicable range			
JXTG12FL-60N-010														
			127		72		52		32				16	
			Thread counts (TPI)											

Parting and threading insert fit the same holder

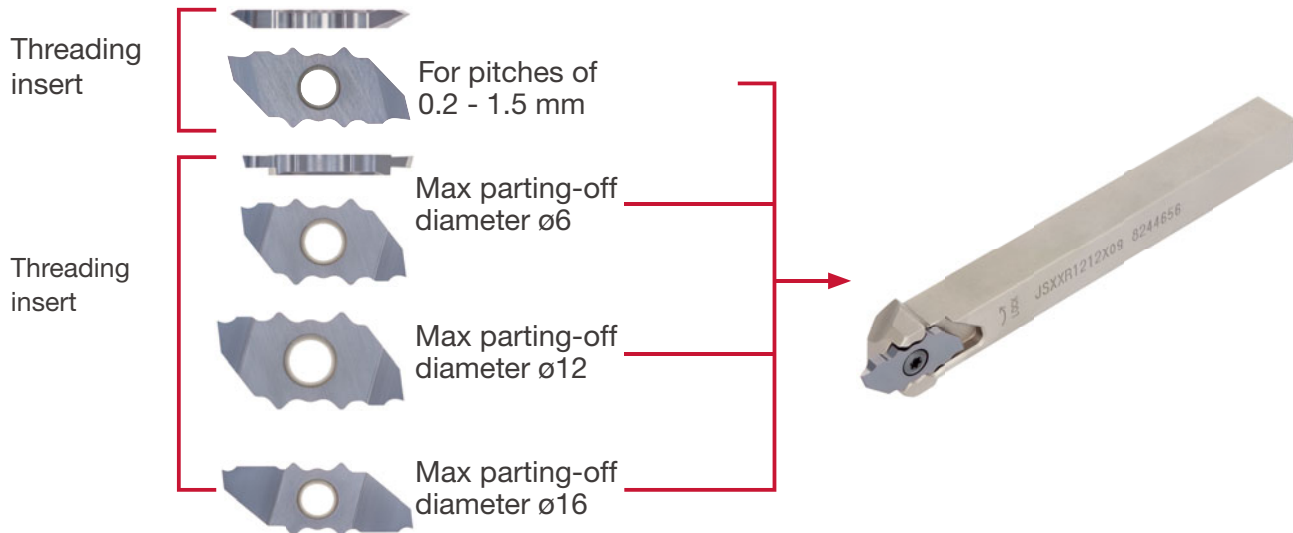

Mountable on the sleeve holder for machining on the second spindle

Cylindrical shanks are available in various diameters.



Cylindrical shank for external machining

Guide to thread machining in Swiss machines


DUOJUST offers a wide range of tools to choose for any operations in Swiss machines

	Guide bushing		For back turning	
	Short thread length	Long thread length	Short thread length	Long thread length
	Application	Application	Application	Application
Tool holder	R-hand holder (JSXXR type)	L-hand holder (JSXXL type)	R-hand holder (JSXXR type)	L-hand holder (JSXXL type)
Insert	JXTG12FR-60A-***	JXTG12FL-60A-***	JXTG12FR-60B-***	JXTG12FL-60B-***

DUOJUST

DuoJust-Cut JSXXR/L

"J-series" Parting-off tool for swiss lathes

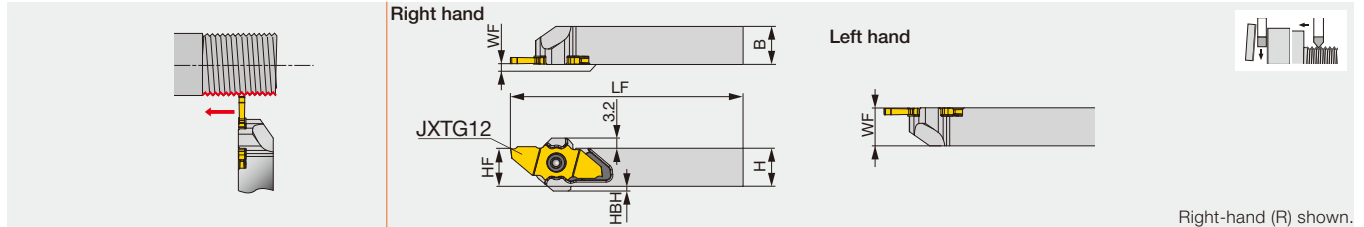

Designation	H	B	WF (R/L)	LF*	HF	HBH	Insert
JSXXR/L1010X09	10	10	0.2 / 9.8	118	10	3	JX...
JSXXR/L1212F09	12	12	0.2 / 9.8	83	12	1.5	JX...
JSXXR/L1212X09	12	12	0.2 / 9.8	118	12	1.5	JX...
JSXXR/L1616X09	16	16	0.2 / 9.8	118	16	0	JX...
JSXXR/L2020H09	20	20	0.2 / 9.8	98	20	0	JX...

- The threading or grooving insert fits this holder. LF may differ when using a parting-off insert.

Note: Use the right-hand insert (JX**G**R***) for a right-hand holder (JSXXR**); the left-hand insert (JX**G**L***) for a left-hand holder (JSXXL**).


SPARE PARTS

Designation	Clamping screw	Wrench
JSXXR****	CSTC-4L100DL	T-1008/5
JSXXL****	CSTC-4L100DR	T-1008/5

DUOJUST

JSXXR/L

Parting and threading toolholder, high pressure coolant compatible

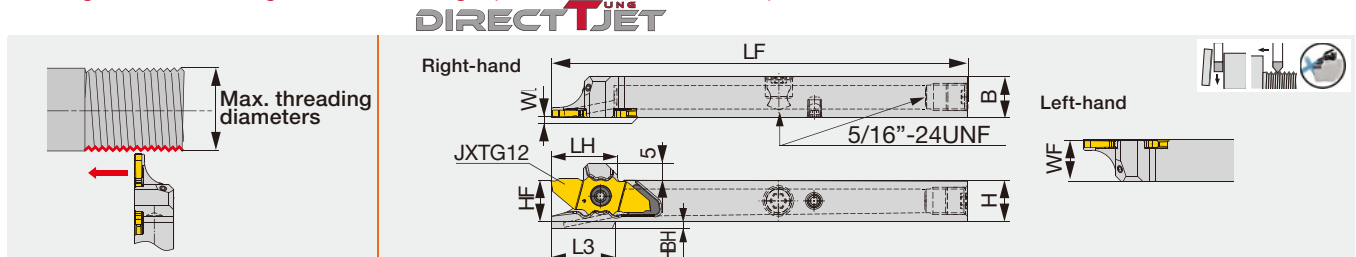

Designation	H	B	WF (R/L)	LF*	HF	HBH	LH*	L3	Insert
JSXXR/L1212X09-CHP	12	12	0.2/11.8	118	12	2	≤ 19.4	18.8	JX**06...,12...,16...
JSXXR/L1616X09-CHP	16	16	0.2/15.8	118	16	2.5	≤ 19.4	18.7	JX**06...,12...,16...

- The threading or grooving insert fits this holder. LF may differ when using a parting-off insert.

Note: Use the right-hand insert (JX**G**R***) for a right-hand holder (JSXXR**); the left-hand insert (JX**G**L***) for a left-hand holder (JSXXL**).

SPARE PARTS

Designation	Clamping screw	Wrench
JSXXR...	CSTC-4L100DL	T-1008/5
JSXXL...	CSTC-4L100DR	T-1008/5


Parting-off widths : 1.0 mm and 1.5 mm (for a max parting diameter of ø6 mm)
: 1.5 mm and 2.0 mm (for max parting diameters of ø12 mm and ø16 mm)
Threading pitch range : 0.2 ~ 1.5 mm

Range of threads machined

Designation	pitch	Max. threading diameters
JXTG12FR/L-60A-000	0.2 - 0.4	Metric thread : M26, Unified : 1"
JXTG12FR/L-60B-000	0.2 - 0.4	Metric thread : M26, Unified : 1"
JXTG12FR/L-60A-005	0.4 - 1	Metric thread : M24, Unified : 15/16"
JXTG12FR/L-60B-005	0.4 - 1	Metric thread : M24, Unified : 15/16"
JXTG12FR/L-60N-010	1 - 1.5	Metric thread : M22, Unified : 7/8"

DuoJust-Cut JS-SXXL09

Toolholder for external threading (double-cornered insert)

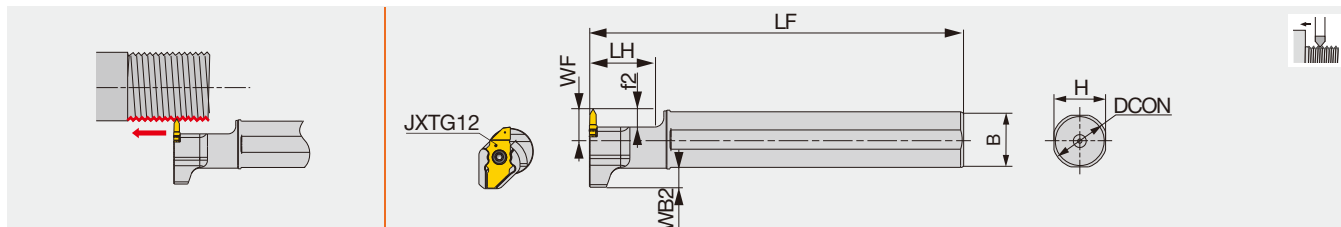

Designation	DCON	H	B	WB2	LF	LH	WF**	f2**	Insert
JS19G-SXXL09	19.05	18	18	5.9	90	21	10	6	JX*G06,12*R
JS19X-SXXL09	19.05	18	18	5.9	120	21	10	6	JX*G06,12*R
JS20G-SXXL09	20	19	19	5.4	90	21	10	6	JX*G06,12*R
JS20X-SXXL09	20	19	19	5.4	120	21	10	6	JX*G06,12*R
JS22X-SXXL09	22	21	21	4.4	120	21	10	6	JX*G06,12*R
JS25H-SXXL09	25	24	24	2.9	100	21	10	6	JX*G06,12*R
JS254X-SXXL09	25.4	24	24	2.7	120	21	10	6	JX*G06,12*R

* Threading insert (JXTG12FR) or parting insert (JXPG06R/12R) fits this holder.

** With JXPG06 insert, f2 will be 2 mm shorter than specified.

SPARE PARTS




Designation	Clamping screw	Wrench
JS***-SXXL09	CSTC-4L055L	T-1008/5

INSERTS

60° thread angle

JXTG12FR/L-60 (For Threading / Sharp edge)

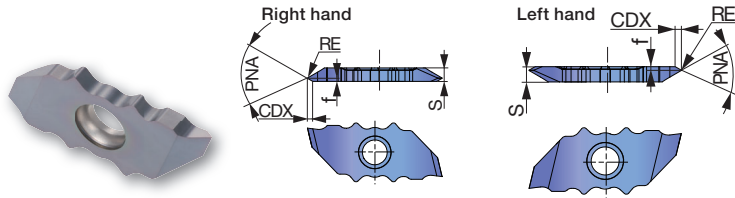

Designation	Grade SH725		Pitch	Dimensions (mm)				
	R	L		PDX	CDX	RE	S	PNA
JXTG12FR/L-60A-000	●	●	0.2 - 0.4	0.25	0.4	0.05 max Flat	2.5	60°
JXTG12FR/L-60B-000	●	●	0.2 - 0.4	2.25	0.4	0.05 max Flat	2.5	60°
JXTG12FR/L-60A-005	●	●	0.4 - 1	0.6	0.99	0.05	2.5	60°
JXTG12FR/L-60B-005	●	●	0.4 - 1	1.9	0.99	0.05	2.5	60°
JXTG12FR/L-60N-010	●	●	1 - 1.5	1.25	2.07	0.1	2.5	60°

● : Line-up

	Type A	Type B	Type N
Right hand			
Left hand			


STANDARD CUTTING CONDITIONS

ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed f (mm/rev)	
P	Low carbon steels (C15, C20, etc.)	SH725	50 - 200	0.2 - 1.5	127 - 16
	Carbon steels, Alloy steels (C55, 42CrMoS4, etc.)	SH725	50 - 200	0.2 - 1.5	127 - 16
	Free cutting steels (SUH22, SUH23, etc.)	SH725	50 - 200	0.2 - 1.5	127 - 16
M	Stainless steels (X5CrNi18-9, X5CrNiMo17-12-2, etc.)	SH725	50 - 200	0.2 - 1.5	127 - 16
N	Aluminium alloys (A5056, A6061, etc.)	SH725	150 - 200	0.2 - 1.5	127 - 16
	Copper alloy (C2600, C280C, etc.)	SH725	100 - 200	0.2 - 1.5	127 - 16
S	Titanium alloys (Ti-6Al-4V, etc.)	SH725	30 - 80	0.2 - 1.5	127 - 16
	Superalloys (Inconel718, etc.)	SH725	30 - 80	0.2 - 1.5	127 - 16

J-SERIES

JSTTR/L

External threading toolholders for Swiss-type lathes

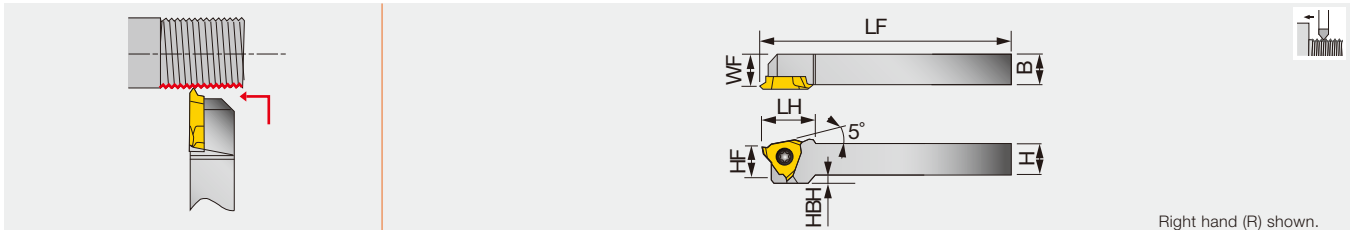

Designation	H	B	LF	LH	HF	WF	HBH	Insert
JSTTR/L1010X3	10	10	120	18.5	10	9.5	2	JTTR/L30...
JSTTR/L1212F3	12	12	85	18.5	12	11.5	-	JTTR/L30...
JSTTR/L1212X3	12	12	120	18.5	12	11.5	-	JTTR/L30...
JSTTR/L1616X3	16	16	120	16.5	16	15.5	-	JTTR/L30...

Recommended clamping torque: 1.2 N·m


SPARE PARTS

Designation	Clamping screw	Wrench
JSTTR/L...	CSTB-4SD	T-8F

J-SERIES

JS-TTL3

External threading toolholders for Swiss-type lathes

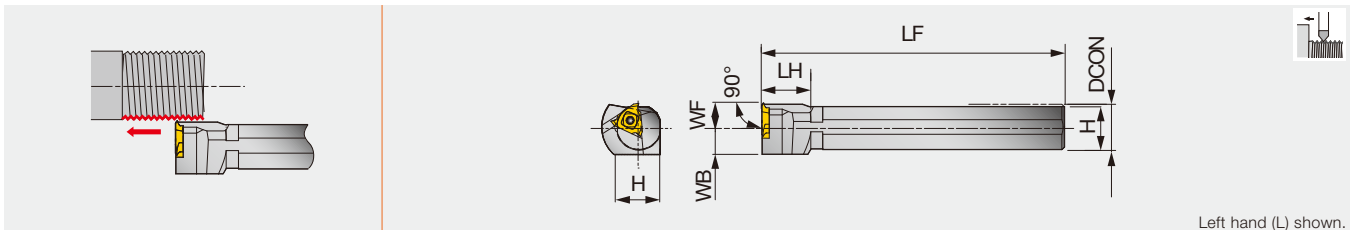

Designation	DCON	WF	LF	LH	H	WB	Insert
JS19K-TTL3	19.05	10	125	20	18	11.5	JTTR30...
JS20K-TTL3	20	10	125	20	19	11.5	JTTR30...
JS22K-TTL3	22	10	125	20	21	11.5	JTTR30...
JS25K-TTL3	25.4	10	125	20	24	12.7	JTTR30...

Recommended clamping torque: 3.5 N·m


SPARE PARTS

Designation	Clamping screw	Wrench
JS**-TTL3	CSTB-4S	T-15F

J-SERIES

INSERTS

JTT (sharp edge)




	RE	SH725		J740		NS9530		TH10		PNA	IC	S	PDX
		R	L	R	L	R	L	R	L				
JTTR/L3005F-55	0.05	●		●						55°	9.525	3.18	0.6
JTTR/L3005F	0.05	●	●	●		●		●		60°	9.525	3.18	0.9
JTTR/L3010F	0.1	●	●	●		●		●		60°	9.525	3.18	0.9

Notes: Left hand holder use right hand insert.
Machinable pitch range: 0.5 to 1 mm.

● : Line-up

J-SERIES**JSXB R/L**

External threading toolholders, screw-on, for Swiss-type lathes

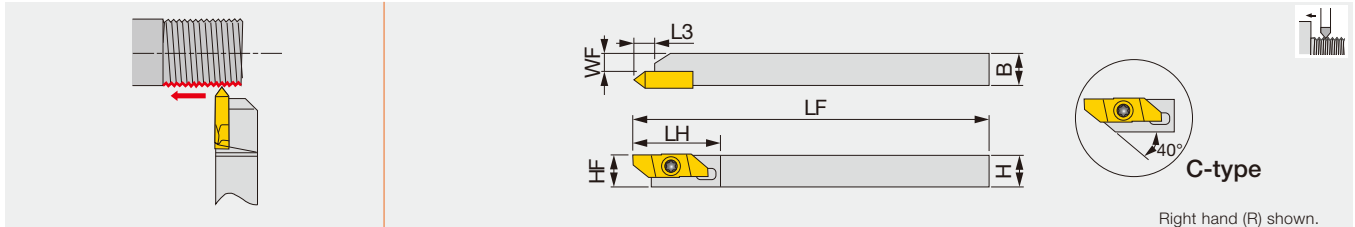

Right hand (R) shown.


Designation	H	B	LF	LH	L3	HF	WF	Insert
JSXBR1010K8-C	10	10	125	29	6.4	10	5.7	JXT*R...
JSXBR1212K8-C	12	12	125	29	6.4	12	7.7	JXT*R...
JSXBR1616K8	16	16	125	29	6.4	16	11.7	JXT*R...
JSXBR2020K8	20	20	125	29	6.4	20	15.7	JXT*R...
JSXBR2525K8	25	25	125	29	6.4	25	20.7	JXT*R...

- Can be wrenched from back side with both end torx screw.
- This toolholder is compatible with JXB-type inserts and JXT-type inserts.

SPARE PARTS

Designation	Clamping screw	Wrench	Wrench 1
JSXBR...	CSTB-4SD	T-8F	(T-8L)

*Optional

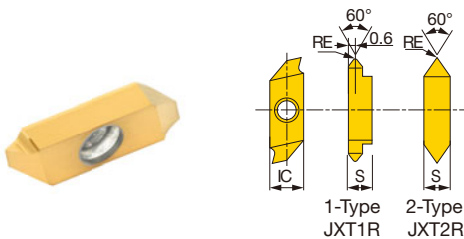INSERTS**JXT (sharp edge)**

Designation	RE	Coated	Uncoated	PNA	IC	S
		J740	TH10			
JXT1R6000F	0.03	●	●	60°	8	3.97
JXT2R6000F	0.03	●	●	60°	8	3.97

Machinable pitch range: 0.5 to 1 mm

● : Line-up

TINY^{INI}MTURN



**Ensures high part quality and machining stability
in ID threading of small parts**

Suited for diameters as small as **ø4 mm**

TINY^{INI}TURN

Ideal sleeve with easy operation

1. Excellent repeatability of solid bars




Exact positioning provides exceptional stability and reliability in tool changeovers

2. Double ports

ø4 mm and ø7 mm shank can be set on ONE sleeve

3. Easy tool changeovers

Solid bar can be changed to suit any type of tool head on the machine due to the clamping screw tilted at 45°

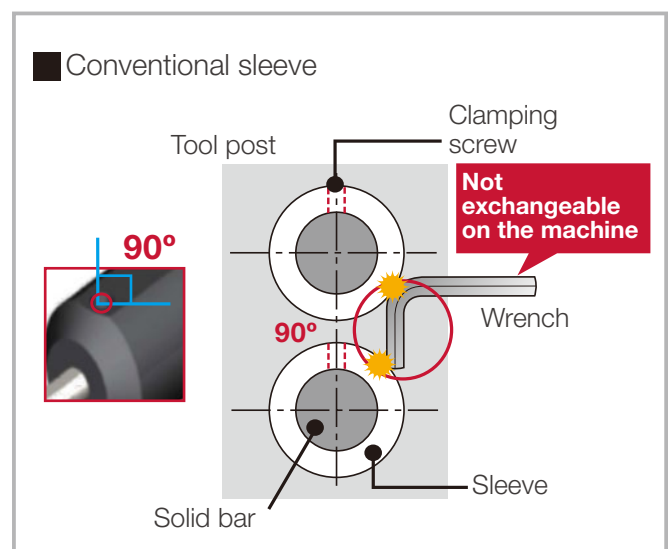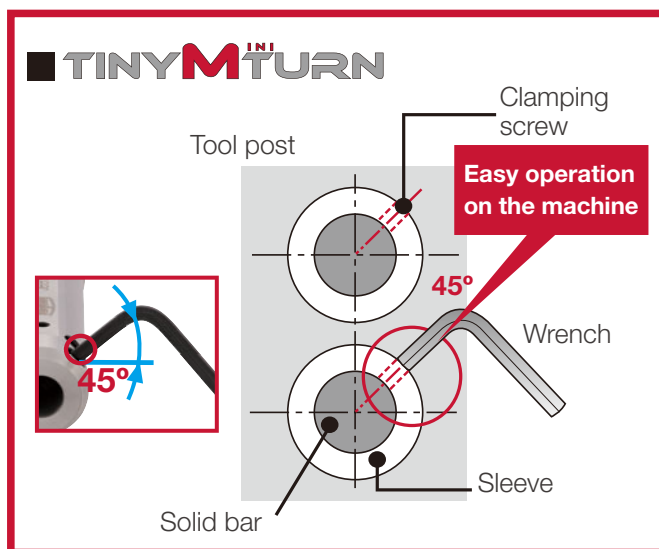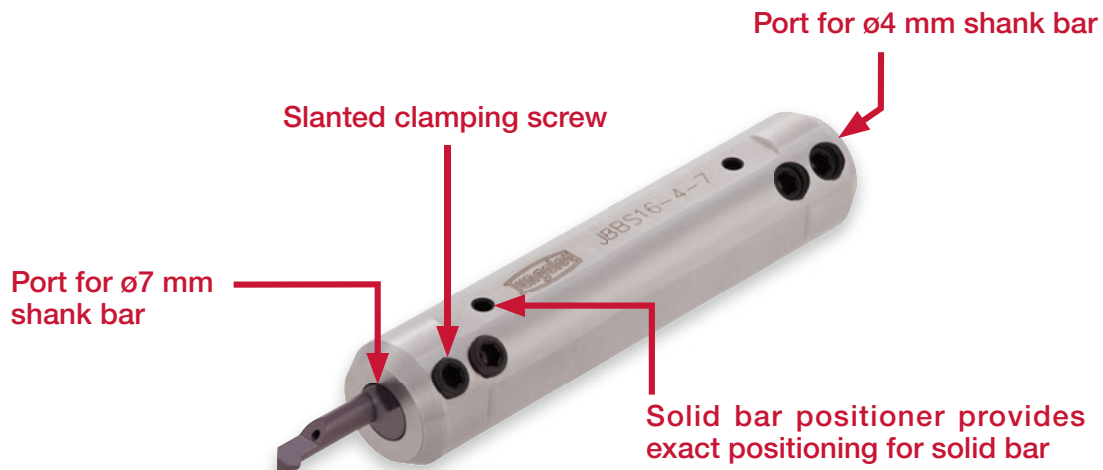

Highly functional sleeve creates extremely stable machining!

Sleeve designed for through-coolant supply

1. Easy connection with coolant tube

Rc1/8 threads are provided at the end of the sleeve for coolant tube connection

2. Designed for optimal overhang lengths

Sleeve and flat lengths are designed to provide optimal overhang lengths

3. High accuracy and efficient tool change

Designed to ensure repetitive accuracy as well as faster and efficient tool change without removing the sleeve from the tool post



New

Collet chuck sleeve

1. Easy tool changeover

Simple and easy tool changeover is possible on the machine


1. Place the tool in the sleeve
2. Tighten the cap with the special wrench

2. High indexing accuracy

Innovative collet chucking system ensures excellent repeatability for precision machining

3. Easy connection to coolant tube

Rc1/8 fitting threads is provided at the end of the sleeve. No additional connection is required for internal coolant supply.

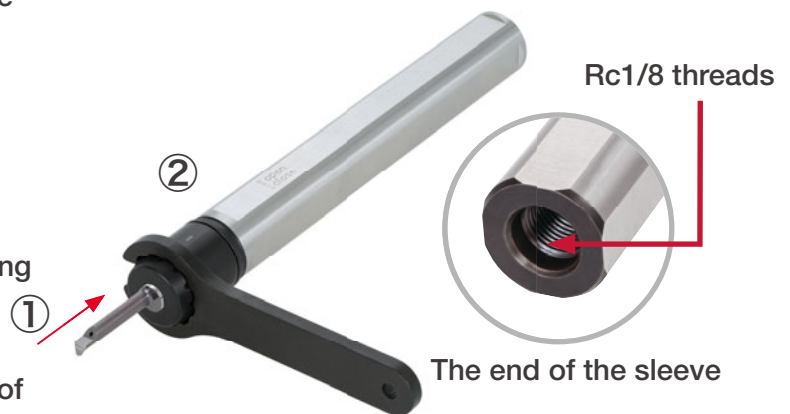


Sleeve selections

Sleeve type	 JBBS	 JBBS-C	New  JBBSA-C
Clamping system	Screw	Screw	Built-in collet
Through-coolant	No	Yes	Yes
Adaptable shank size	Both ø4 mm and ø7 mm can be assembled on the same sleeve	Separate sleeves for ø4 mm and ø7 mm	Separate sleeves for ø4 mm and ø7 mm
Available sleeve diameters	10 sizes, ø12.0 mm - ø25.4 mm	7 sizes, ø15.875 mm - ø25.4 mm	2 sizes, ø16 mm and ø20 mm
Tool changeover in the machine	Efficient	Efficient	Very Efficient

TINY^{INI}TURN

TinyMini-Turn JBIR

Solid boring bars for threading, metric thread

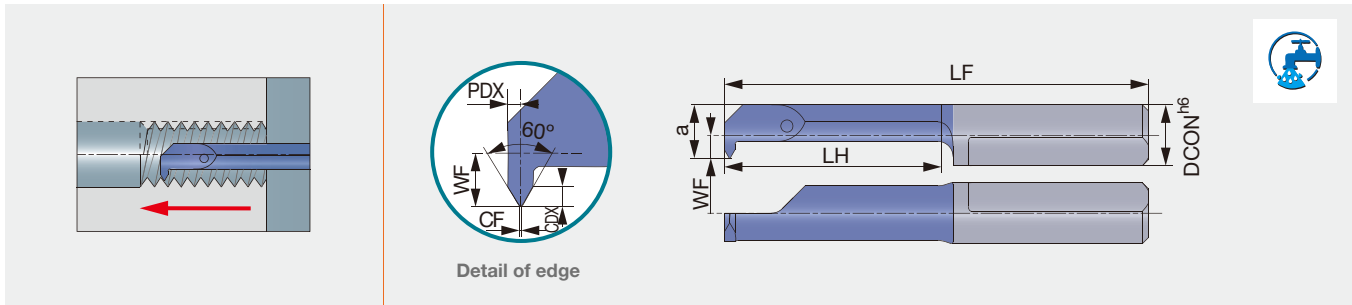


Right hand (R) shown.

Designation	Grade SH730	Pitch	DMIN	$\begin{smallmatrix} 0 \\ -0.02 \end{smallmatrix}$ CF	DCON	WF	a	LF	LH	CDX	PDX
JBIR04140050-D040	●	0.5	4	0.06	4	1.5	3.5	30	14	0.3	0.35
JBIR07140050-D050	●	0.5	5	0.06	7	0.9	4.4	30	14	0.3	0.35
JBIR07140075-D050	●	0.75	5	0.09	7	0.9	4.4	30	14	0.4	0.45
JBIR07140100-D048	●	1.0	4.8	0.12	7	0.9	4.4	30	14	0.6	0.55
JBIR07140100-D060	●	1.0	6	0.12	7	1.8	5.3	30	14	0.6	0.55
JBIR07140125-D060	●	1.25	6	0.15	7	1.8	5.3	30	14	0.7	0.65
JBIR07140150-D060	●	1.5	6	0.18	7	1.8	5.3	30	14	0.8	0.75
JBIR07140150-D070	●	1.5	7	0.18	7	2.8	6.3	30	14	0.8	0.75

● : Line-up

TINY^{INI}TURN

STANDARD CUTTING CONDITIONS




Threading (metric thread)

ISO	Workpiece materials	Grade	Cutting speed Vc (m/min)	Number of passes Pitch (mm)				
				0.5	0.75	1	1.25	1.5
P	Low carbon steels (C15, C20 etc.)	SH730	40 - 140	6 - 8	8 - 10	10 - 12	12 - 15	15 - 18
	Carbon steels, Alloy steels (C55, 42CrMoS4 etc.)	SH730	40 - 140	6 - 8	8 - 10	10 - 12	12 - 15	15 - 18
	Prehardened steels (NAK80, PX5 etc.)	SH730	40 - 140	6 - 8	8 - 10	10 - 12	12 - 15	15 - 18
M	Stainless steels (X5CrNi18-9, X5CrNiMo17-12-2 etc.)	SH730	40 - 140	8	10	12	15	18
K	Grey cast irons (250, 300 etc.)	SH730	30 - 100	7	9	12	14	17
	Ductile cast irons (400-15, 600-3 etc.)	SH730	30 - 100	7	9	12	14	17
N	Aluminium alloys, copper alloys Si < 12%	SH730	90 - 200	6	8	10	12	15

JBBSA-C

Collet chuck sleeve for solid carbide bars

New

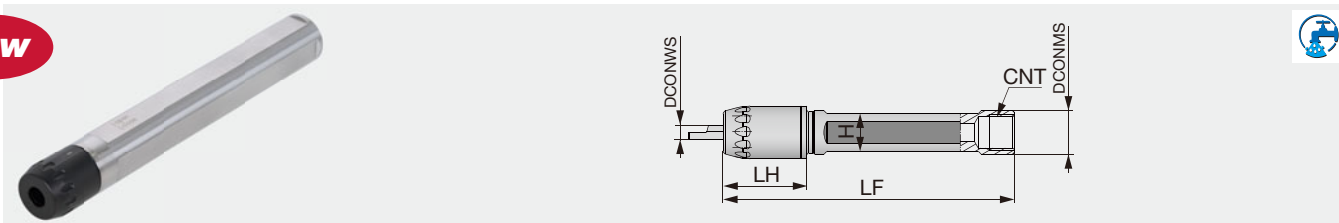

Designation	DCONMS	DCONWS	LF	LH	H	CNT
JBBSA16-4-L100C	16	4	100	23	14	Rc1/8
JBBSA16-7-L100C	16	7	100	23	18	Rc1/8
JBBSA20-4-L120C	20	4	120	23	18	Rc1/8
JBBSA20-7-L120C	20	7	120	23	18	Rc1/8

SPARE PARTS




Designation	Cap	Wrench
JBBSA**-4-L100C	CAP-A-4	WRENCH-A-4
JBBSA**-7-L100C	CAP-A-7	WRENCH-A-7

TINY^{INI}TURN

TinyMini-Turn JBBS

Sleeve with double ends, clamping two different sizes of carbide shanks with coolant supply

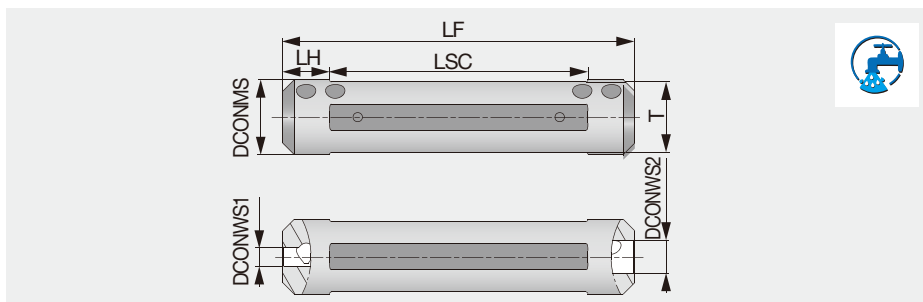

Designation	DCONMS	DCONWS1	DCONWS2	LF	LH	LSC	H
JBBS12-4-4	12	4	4	75	10	55	10.3
JBBS127-4-4	12.7	4	4	76.2	10	56.2	11.6
JBBS14-4-4	14	4	4	75	10	55	12
JBBS159-4-7	15.875	4	7	76.2	10	56.2	14
JBBS16-4-7	16	4	7	75	10	55	15
JBBS19-4-7	19.05	4	7	89	10	69	17.2
JBBS20-4-7	20	4	7	90	10	70	18
JBBS22-4-7	22	4	7	90	10	70	20
JBBS25-4-7	25	4	7	100	10	80	23
JBBS254-4-7	25.4	4	7	90	10	70	23.4

SPARE PARTS




Designation	Clamping screw	Wrench
JBBS12-4-4	SSHM5-4PF-S	P-2.5
JBBS14-4-4	SSHM5-4PF-S	P-2.5
JBBS127-4-4	SSHM5-6PF-S	P-2.5
JBBS...-4-7	SSHM5-6PF-S	P-2.5

TINY^{MINI}TURN

TinyMini-Turn JBBS-C

Single end sleeve with external coolant insert

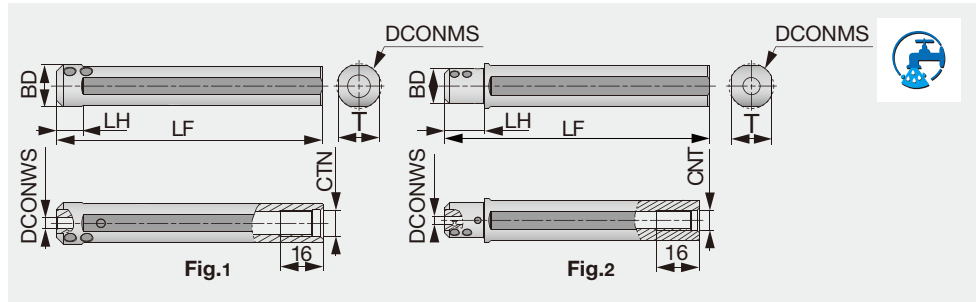


Designation	DCONMS	BD	DCONWS	LF	LH	H	CNT	Fig
JBBS159-4-L100C	15.875	15.875	4	100	10	14.58	R1/8	1
JBBS159-7-L100C	15.875	15.875	7	100	10	14.58	R1/8	1
JBBS16-4-L100C	16	16	4	100	10	15	R1/8	1
JBBS16-7-L100C	16	16	7	100	10	15	R1/8	1
JBBS19-4-L100C	19.05	17.5	4	100	20	17.2	R1/8	2
JBBS19-7-L100C	19.05	17.5	7	100	20	17.2	R1/8	2
JBBS20-4-L100C	20	17.5	4	100	20	18	R1/8	2
JBBS20-7-L100C	20	17.5	7	100	20	18	R1/8	2
JBBS22-4-L100C	22	17.5	4	100	20	20	R1/8	2
JBBS22-7-L100C	22	17.5	7	100	20	20	R1/8	2
JBBS25-4-L100C	25	18	4	100	23	23	R1/8	2
JBBS25-7-L100C	25	18	7	100	23	23	R1/8	2
JBBS254-4-L100C	25.4	18	4	100	23	23.4	R1/8	2
JBBS254-7-L100C	25.4	18	7	100	23	23.4	R1/8	2

SPARE PARTS



Designation	Clamping screw	Wrench
JBBS...-4-L100C	SSHM5-6PF-S	P-2.5
JBBS...-7-L100C	SSHM5-4PF-S	P-2.5

TUNGT-CLAMP

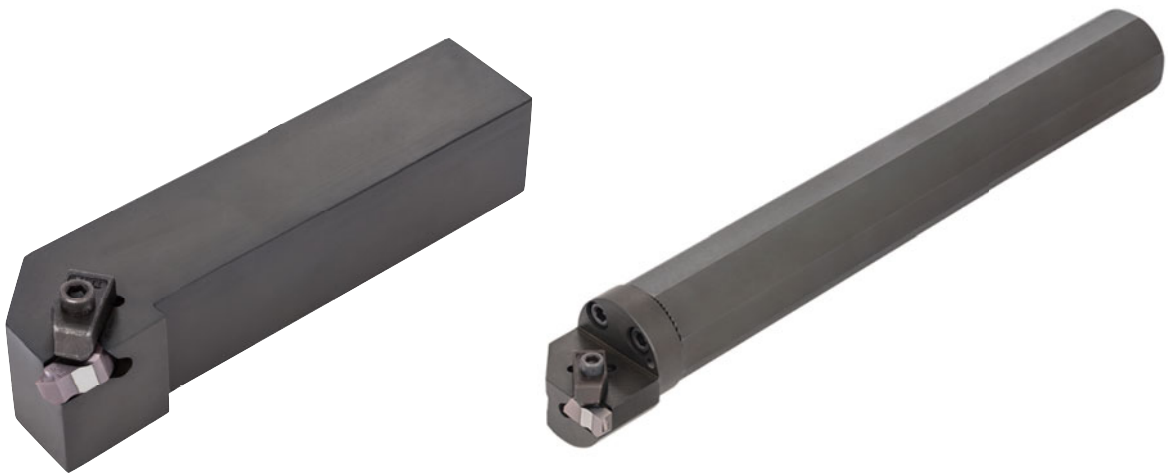


Multi-purpose tool with strong and secure clamping
for heavy-duty grooving and threading

TUNG-CLAMP

Strong and secure clamping


- Threading and grooving inserts fit the same tool holder
- Safe and secure insert retention enabled by a combination of the dove-tail method firmly pressed down with a clamp
- Head-changeable ID grooving/threading tool holder for easy tool change

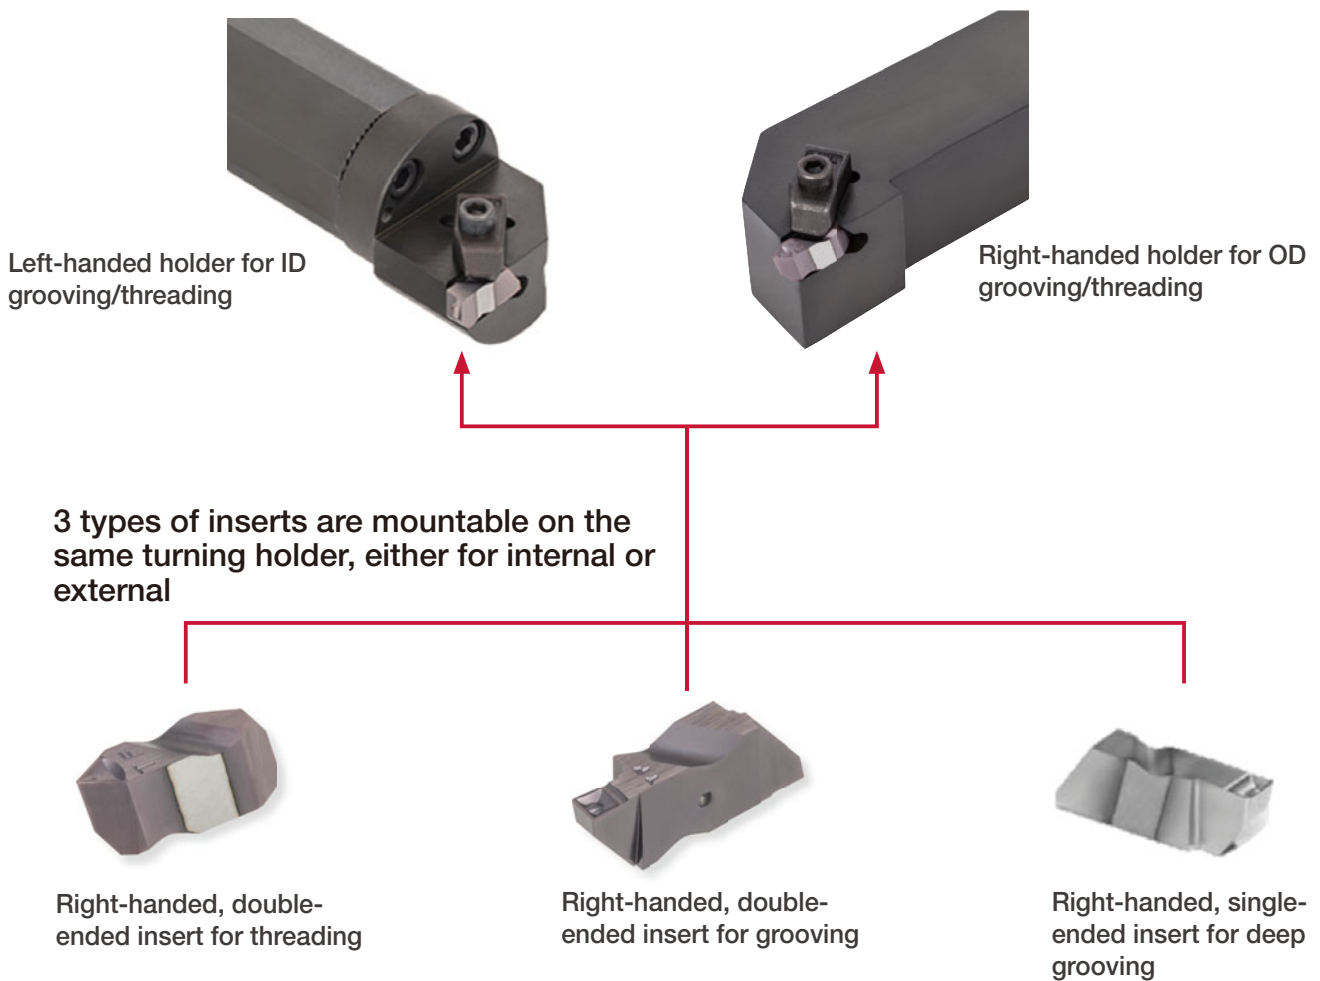

TUNGST-CLAMP

A_M-FLER/L

Internal toolholders for grooving & threading

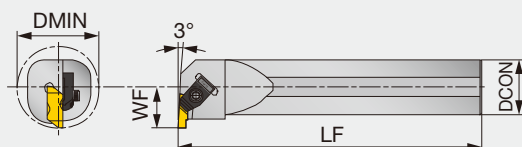

Right hand (R) shown.

Designation	Pitch	DMIN	DCON	LF	WF	Insert
A25M-FLER/L3	2.11 - 5.08	34.9	25	300	17.7	FL*-3**L/R...
A32M-FLER/L3	2.11 - 5.08	44.5	32	350	22.1	FL*-3**L/R...
A40M-FLER3	2.11 - 5.08	50.8	40	350	24.5	FL*-3**L...

SPARE PARTS




Designation	Clamp	Clamping screw	Wrench
A**M-FLER3	TF-73	S-412	5/32HEX
A**M-FLEL3	TF-72	S-412	5/32HEX

TUNGST-CLAMP

HS-FLER/L

Exchangeable heads for internal grooving & threading, applicable on S-570 shanks

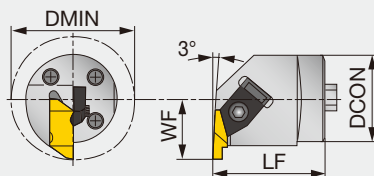

Right hand (R) shown.

Designation	Pitch	DMIN	DCON	LF	WF	Insert
HS40-FLER3W	2.11 - 5.08	56.1	40	40.1	28	FL*-3**L...
HS50-FLER3W	2.11 - 5.08	70.1	50	41.9	35	FL*-3**L...

SPARE PARTS




Designation	Clamp	Clamping screw	Wrench
HS40-FLER3W	TF-73	S-412	5/32HEX
HS50-FLER3W	TF-73	S-412	5/32HEX

TUNG-CLAMP

S-570

Steel shanks for exchangeable head

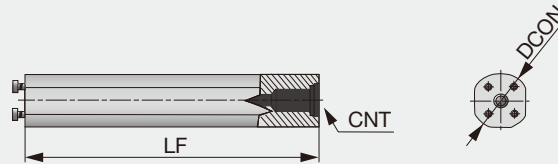

Designation	DCON	LF	CNT
S-570-40M-40	40	273	1/2-14NPT
S-570-50M-50	50	366	1/2-14NPT


SPARE PARTS



Designation	Clamping screw	Wrench
S-570-40M-40	SS100	5/32HEX
S-570-50M-50	SS94	1/4HEX

INSERTS

FLT-CB For threading



Designation	rε	AH725		Pitch						
		R	L	Internal	External	IC	PDX	BW	S	M
FLT-3R/L-HCB	0.17	●	●	2.11 - 5.08	1.27 - 4.23	9.525	2.49	4.95	8.74	10.16
FLT-3R/LC-HCB	0.35	●	●	4.23 - 5.08	2.31 - 4.23	9.525	2.49	4.95	8.74	10.16
FLT-3R/L-CB	0.17	●	●	2.11 - 3.175	1.27 - 3.175	9.525	2.49	4.95	8.74	10.16

● : Line-up

TUNG-CLAMP

STANDARD CUTTING CONDITIONS

ISO	Workpiece materials	Grade	Application	Cutting speed Vc (m/min)	Pitch (mm)	TPI (TPI)
P	Steel (S45C/C45 etc.)	AH725	Threading	80 - 180	Internal 2.11 - 5.08 External 1.27 - 4.23	Internal 5 - 12 Internal 6 - 20
	Carbon steels, Alloy steels (C55, 42CrMoS4 etc.)	AH725	Threading	60 - 160	Internal 2.11 - 5.08 External 1.27 - 4.23	Internal 5 - 12 External 6 - 20
M	Stainless steels (X5CrNi18-9, X5CrNiMo17-12-2 etc.)	AH725	Threading	50 - 130	Internal 2.11 - 5.08	Internal 5 - 12
					External 1.27 - 4.23	External 6 - 20

Edge-on insert




Ensures stability in threading coarse and large-pitch threads

TUNGTHREAD


A range from 16 TPI through 3 TPI is covered by just 2 different types of inserts

While conventional 16ER, 22ER, and 27ER laydown style inserts can only cover a 16 TPI to 4 TPI range

ACME STUB ACME	TPI								
	16	14	12	10	8	6	5	4	3
Existing 	16ER					22ER		27ER	
New series 	TNM*43						TNM*54		

Unique insert geometry ensures burr-free and close thread profiles

For ACME and STUB ACME thread inserts

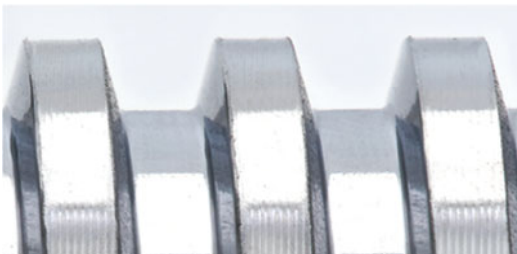


ACME threads with full profile insert




ACME threads without de-burring geometry

All threading inserts for API Round and API Buttress threads feature de-burring geometry to ensure thread profile accuracy

API Round threads
with de-burring geometry




API Buttress
Full profile insert



TUNGTHREAD

MTVOR/L

Multi-clamp holder for external threading (edge-on style)

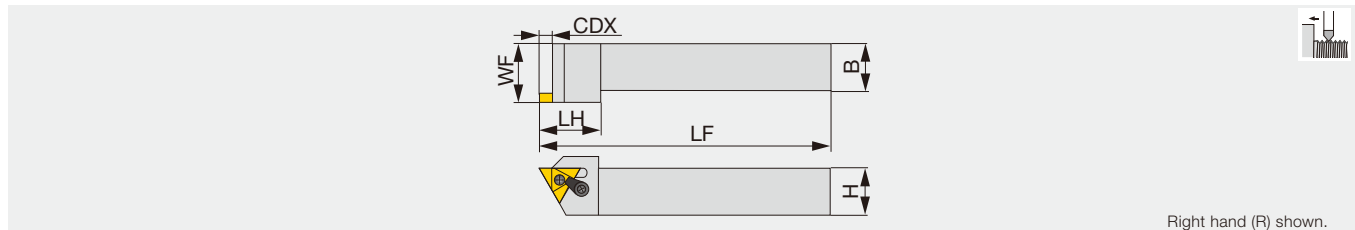

Designation	H	B	LF	LH	WF	CDX	Insert
MTVOR-2525M4	25	25	150	31	31.7	5.8	TNM*43...
MTVOR-3232M4	32	32	178	31	38.1	5.8	TNM*43...
MTVOR-2525M5	25	25	150	36	31.7	7.3	TNM*54...
MTVOR-3232M5	32	32	178	36	38.1	7.3	TNM*54...

SPARE PARTS




Designation	Lock pin	Clamp	Clamping screw	Wrench
MTVOR-**M4	NL-44	TC-190	STC-5	3/32HEX
MTVOR-**M5	NL-56	TC-250	STC-11	1/8HEX

TUNGTHREAD

STVOR/L

External multi-clamp toolholders for on edge inserts

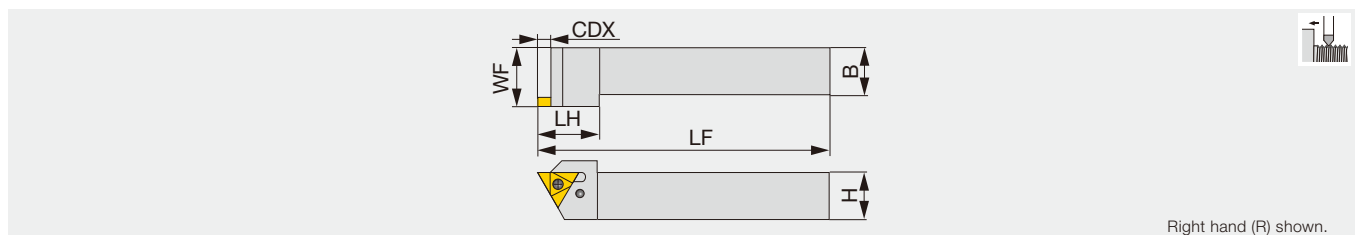

Designation	H	B	LF	LH	WF	CDX	Insert
STVOR-2525M4	25	25	150	31	31.7	5.8	TNMC43...
STVOR-3232M4	32	32	178	31	38.1	5.8	TNMC43...
STVOR-2525M5	25	25	150	36	31.7	7.3	TNMC54...
STVOR-3232M5	32	32	178	36	38.1	7.3	TNMC54...

SPARE PARTS




Designation	Lock pin	Clamp (Option)	Clamping screw (Option)	Wrench
STVOR-**M4	SD2	TC-190	STC-9	T-20TORX 3/32HEX
STVOR-**M5	SD3	TC-250	STC-11	T-20TORX 1/8HEX

TUNGTHREAD

HS-MTHOR/L

Multi-clamp holder for Internal threading (edge-on style)

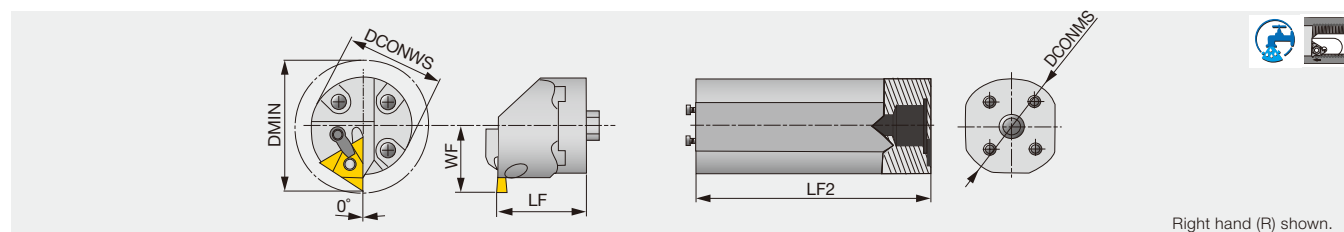

Designation	DMIN	DCONWS	WF	LF	Insert
HS40-MTHOR-4	66.7	40	25.9	32	TNM*43...
HS50-MTHOR-4	73	50	35.9	40	TNM*43...
HS40-MTHOR-5	81.3	40	30.6	32	TNM*54...
HS50-MTHOR-5	82.6	50	35.9	40	TNM*54...

SPARE PARTS

Designation	Lock pin	Clamp	Clamping screw	Wrench
HS**-MTHOR-4	NL-44	TC-190	STC-5	3/32HEX
HS**-MTHOR-5	NL-56	TC-250	STC-11	1/8HEX

Shank


Designation	DCONMS	LF2
S-570-40M-40	40	273
S-570-50M-50	50	366

SPARE PARTS


Designation	Clamping screw	Wrench
S-570-40M-40	SS100	5/32HEX
S-570-50M-50	SS94	1/4EX

TUNGTHREAD

Edge-on inserts



TNMA




TNMC

Connection	TPI	Taper		External insert				Internal insert			
		mm/mm	TPF	Designation	Grade	IC	S	Designation	Grade	IC	S
					Coated				Coated		
					AH725				AH725		
API Round	10	1/16	0.75	TNMA 43 10RD EXT	●	12.7	4.8	TNMA 43 10RD INT	●	12.7	4.8
	8	1/16	0.75	TNMA 43 8RD EXT	●	12.7	4.8	TNMA 43 8RD INT	●	12.7	4.8
API Buttress	5	1/12	1	TNMA 54 5B1 EXT-FC	●	15.875	6.4	TNMA 54 5B1 INT-FC	●	15.875	6.4
	5	1/16	0.75	TNMA 54 5B75 EXT-FC	●	15.875	6.4	TNMA 54 5B75 INT-FC	●	15.875	6.4
ACME (29° Trapezoid)	16	-	-	TNMA43NT16PEXT-PT	●	12.7	4.8	-	-	-	-
	14	-	-	TNMA43NT14PEXT-PT	●	12.7	4.8	-	-	-	-
	12	-	-	TNMA43NT12PEXT-PT	●	12.7	4.8	-	-	-	-
	10	-	-	TNMA43NT10PEXT-PT	●	12.7	4.8	-	-	-	-
	8	-	-	TNMA43NT8PEXT-PT	●	12.7	4.8	-	-	-	-
	6	-	-	TNMA43NT6PEXT-PT	●	12.7	4.8	-	-	-	-
	5	-	-	TNMA54NT5PEXT-PT	●	15.875	6.4	-	-	-	-
	4	-	-	TNMA54NT4PEXT-PT	●	15.875	6.4	-	-	-	-
	3	-	-	TNMA54NT3PEXT-PT	●	15.875	6.4	-	-	-	-
STUB ACME (29° Trapezoid)	16	-	-	TNMA43NT16PSTUBE-PT	●	12.7	4.8	-	-	-	-
	14	-	-	TNMA43NT14PSTUBE-PT	●	12.7	4.8	-	-	-	-
	12	-	-	TNMA43NT12PSTUBE-PT	●	12.7	4.8	-	-	-	-
	10	-	-	TNMA43NT10PSTUBE-PT	●	12.7	4.8	-	-	-	-
	8	-	-	TNMA43NT8PSTUBE-PT	●	12.7	4.8	-	-	-	-
	6	-	-	TNMA43NT6PSTUBE-PT	●	12.7	4.8	-	-	-	-
	5	-	-	TNMA54NT5PSTUBE-PT	●	15.875	6.4	-	-	-	-
	4	-	-	TNMA54NT4PSTUBE-PT	●	15.875	6.4	-	-	-	-
	3	-	-	TNMA54NT3PSTUBE-PT	●	15.875	6.4	-	-	-	-
API Round	10	1/16	0.75	TNMC 43 10RD EXT	●	12.7	4.8	TNMC 43 10RD INT	●	12.7	4.8
	8	1/16	0.75	TNMC 43 8RD EXT	●	12.7	4.8	TNMC 43 8RD INT	●	12.7	4.8
API Buttress	5	1/12	1	TNMC 54 5B1 EXT-FC	●	15.875	6.4	TNMC 54 5B1 INT-FC	●	15.875	6.4
	5	1/16	0.75	TNMC 54 5B75 EXT-FC	●	15.875	6.4	TNMC 54 5B75 INT-FC	●	15.875	6.4
ACME (29° Trapezoid)	16	-	-	TNMC43NT16PEXT-PT	●	12.7	4.8	-	-	-	-
	14	-	-	TNMC43NT14PEXT-PT	●	12.7	4.8	-	-	-	-
	12	-	-	TNMC43NT12PEXT-PT	●	12.7	4.8	-	-	-	-
	10	-	-	TNMC43NT10PEXT-PT	●	12.7	4.8	-	-	-	-
	8	-	-	TNMC43NT8PEXT-PT	●	12.7	4.8	-	-	-	-
	6	-	-	TNMC43NT6PEXT-PT	●	12.7	4.8	-	-	-	-
	5	-	-	TNMC54NT5PEXT-PT	●	15.875	6.4	-	-	-	-
	4	-	-	TNMC54NT4PEXT-PT	●	15.875	6.4	-	-	-	-
	3	-	-	TNMC54NT3PEXT-PT	●	15.875	6.4	-	-	-	-
STUB ACME (29° Trapezoid)	16	-	-	TNMC43NT16PSTUBE-PT	●	12.7	4.8	-	-	-	-
	14	-	-	TNMC43NT14PSTUBE-PT	●	12.7	4.8	-	-	-	-
	12	-	-	TNMC43NT12PSTUBE-PT	●	12.7	4.8	-	-	-	-
	10	-	-	TNMC43NT10PSTUBE-PT	●	12.7	4.8	-	-	-	-
	8	-	-	TNMC43NT8PSTUBE-PT	●	12.7	4.8	-	-	-	-
	6	-	-	TNMC43NT6PSTUBE-PT	●	12.7	4.8	-	-	-	-
	5	-	-	TNMC54NT5PSTUBE-PT	●	15.875	6.4	-	-	-	-
	4	-	-	TNMC54NT4PSTUBE-PT	●	15.875	6.4	-	-	-	-
	3	-	-	TNMC54NT3PSTUBE-PT	●	15.875	6.4	-	-	-	-

• For ACME and STUB-ACME inserts can cut crest radius. Crest flat of ACME and STUB-ACME have to be cut by another tool.

● : Line-up


TT insert 60° metric threads

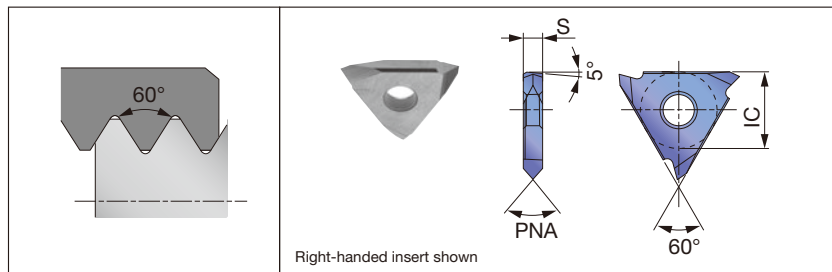

For external/internal threads

Pitch (mm)	TPI	L/R	Insert description	Grade		IC	S	PNA	Tool holder
				Cermet	Uncoated				
				NS9530	TH10				
≤ 3	≥ 8	R	TTR42M-005	●	●	12.7	3.2	60°	TT-****RE/LI
≤ 3	≥ 8	L	TTL42M-005	●	●	12.7	3.2	60°	TT-****LE/RI

TT insert 55° Whitworth, partial profile, for external / internal threads

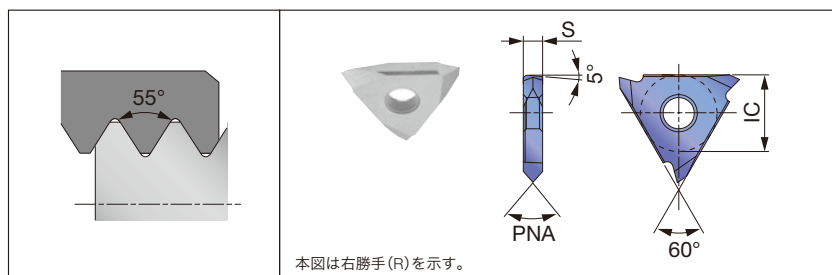

55° Whitworth, partial profile, for external/internal threads


Pitch (mm)	TPI	L/R	Insert description	Grade		IC	S	PNA	Tool holder
				Cermet	Uncoated				
				NS9530	TH10				
≤ 3	≥ 8	R	TTR42W-005	●	●	12.7	3.2	55°	TT-****RE/LI
≤ 3	≥ 8	L	TTL42W-005	●	●	12.7	3.2	55°	TT-****LE/RI

● : Line up / Packing Quantity= 5 pcs

TUNGTHREAD

TT-R/LE

"TT type "External threading toolholders, pin lock

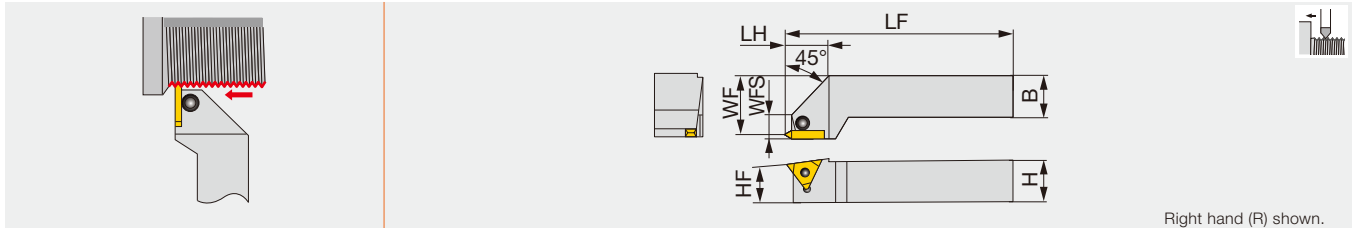

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	WFS	Insert
TT-2525R/LE	25	25	150	25	25	32	15	TTR/L42...


SPARE PARTS

Designation	Clamp	Right-left screw	Wrench
TT-2525R/LE	CP91	DS-6	P-3

TUNGTHREAD

TT-R/LI

"TT type "Internal threading toolholders, pin lock

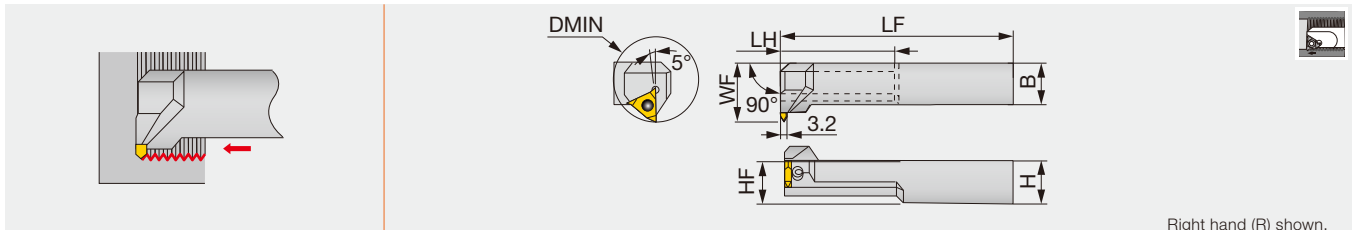

Right hand (R) shown.


Designation	DMIN	H	B	LF	LH	HF	WF	Insert
TT-2525RI	50	25	25	200	70	25	35	TTL42...

Notes : The left hand insert is used for right hand toolholders.

SPARE PARTS


Designation	Clamp	Right-left screw	Wrench
TT-2525RI	CP91	DS-6	P-3

- Relationship between pitch, depth of cut and number of passes for external metric threading

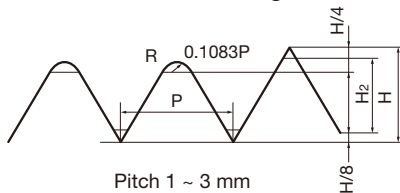

Note: Maximum machinable pitch is 3 mm.

	P	1	1.25	1.5	1.75	2	2.5	3
H ₂	0.6	0.76	0.92	1.09	1.25	1.57	1.9	
H	0.866	1.083	1.299	1.516	1.732	2.165	2.598	
Number of passes	1	0.25	0.3	0.3	0.3	0.35	0.4	0.4
	2	0.15	0.2	0.25	0.25	0.25	0.3	0.35
	3	0.1	0.1	0.15	0.2	0.2	0.25	0.28
	4	0.05	0.06	0.1	0.1	0.16	0.2	0.2
	5	0.05	0.06	0.05	0.1	0.1	0.15	0.2
	6		0.06	0.05	0.07	0.07	0.1	0.13
	7			0.02	0.05	0.05	0.07	0.1
	8				0.02	0.02	0.05	0.1
	9					0.02	0.03	0.05
	10						0.02	0.05
	11							0.02
	12							0.02




Chaser



Multi-tooth chaser inserts for efficient threading




Chaser - highly efficient threading tool for reduced machining time

One chaser insert accommodates roughing, semi-finishing, and finishing teeth, enabling 4 different passes to be integrated into one single pass.

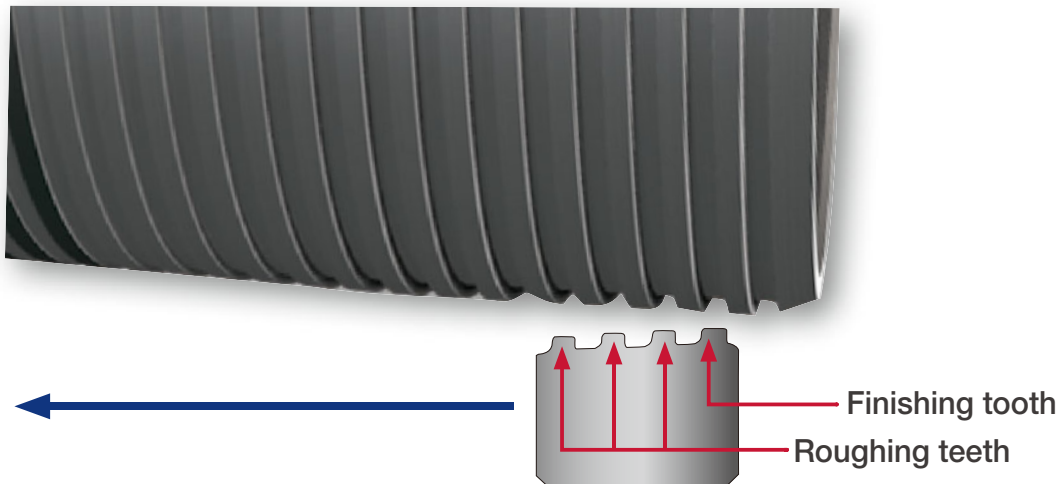

Available in major thread standards for the oil and gas industries

Chasers are designed for efficient external/internal threading of tubes, cases, and couplings for the oil and gas industries. Available for popular thread standards as below.


Thread standard	Thread profile	Standard threads per inch
API Round threads		- 8TPI (For tubing and casing) - 10TPI (For tubing)
API Buttress threads		- 5TPI, 1/16taper (For tube diameters 13-3/8" or less) - 5TPI, 1/12taper (For tube diameters 16" and above)
ANIS/ASME NPT threads		- 8TPI - 11.5TPI

Chaser

TUNGTHREAD

CLVOR

External toolholders for the chaser inserts

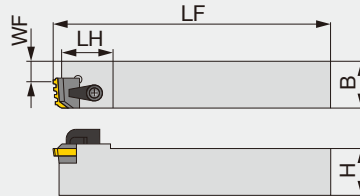

Right-hand (R) shown.


Designation	WF	LF	LH	H	B	Insert
CLVOR-25M6	16.1	178	32	25	25	CR-8R/10R/11.5NPT/8NPT-3E/4E
CLVOR-32M6	16.1	178	32	32	32	CR-8R/10R/11.5NPT/8NPT-3E/4E
CLVOR-40M8	29.8	179	32	40	40	CR-5B75-4E

SPARE PARTS



Designation	Shim	Shim screw	Clamp	Clamping screw	Wrench
CLVOR-25M6	TF1207	SF80	TC-311	STC-4	T-25TORX 5/32HEX
CLVOR-32M6	TF1207	SF85	TC-311	STC-4	T-25TORX 5/32HEX
CLVOR-40M8	TF8132-E	SF60	TC-311	STC-4	T-20TORX 5/32HEX

Full profile insert (chaser)

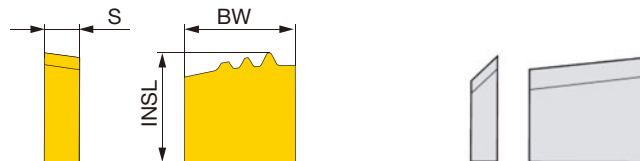

Connection	TPI	Taper		Designation	AH725	BW	INSL	S	Breakerpiece
		mm/mm	TPF						
API Round	8	1/16	0.75	CR-8R-3E	●	16	15	5.2	CR-8R / 10R-3E / 4E-CB
	10	1/16	0.75	CR-10R-3E	●	16	15.9	5.2	CR-8R / 10R-3E / 4E-CB
API Buttress	5	1/16	0.75	CR-5B75-4E	●	20.4	15.9	5.1	CR-5B75 / 5B1-4E-CB
NPT	11.5	1/16	0.75	CR-11.5NPT-4E	●	16	15.7	5.2	CR-8R / 10R-3E / 4E-CB
	8	1/16	0.75	CR-8NPT-4E	●	16	15.7	5.2	CR-8R / 10R-3E / 4E-CB

TUNGTHREAD

CNGA-3E

API Round & buttress chaser insert with 2 corners for turning

Full profile insert (chaser)



Connection	TPI	Taper		Designation	AH725
		mm/mm	TPF		
API Round	10	1/16	0.75	CNGA-10R-3E	●
	8	1/16	0.75	CNGA-8R-3E	●
API Buttress	5	1/16	0.75	CNGA-5B75-3E	●


Note: Toolholder should be designed and ordered individually.

Chaser

TUNGTHREAD

SI-CLHOR

Internal toolholders for the chaser inserts

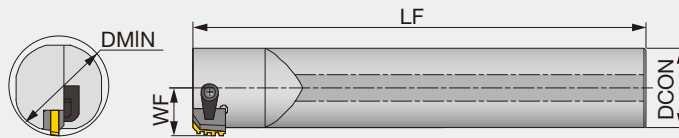

Right-hand (R) shown.


Designation	DMIN	DCON	WF	LF	Insert
SI-CLHOR-40M6	50.8	40	23.16	400	CR-**I

SPARE PARTS



Designation	Clamp	Clamping screw	Wrench
SI-CLHOR-40M6	TC-311	STC-8	5/32HEX

Full profile insert (chaser)

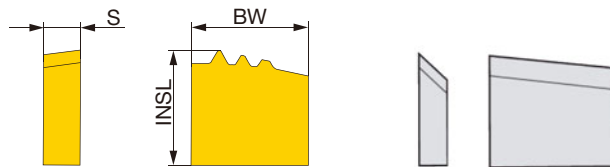

Connection	TPI	Taper		Designation	AH725	INSL	LE	S	Breakerpiece
		mm/mm	TPF						
API Round	8	1/16	0.75	CR-8R-3I	●	16	15	5.2	CR-8R / 10R-3I / 4I-CB
	10	1/16	0.75	CR-10R-3I	●	16	15.9	5.2	CR-8R / 10R-3I / 4I-CB
API Buttress	5	1/16	0.75	CR-5B75-3I	●	16	15.8	5.2	CR-8R / 10R-3I / 4I-CB
NPT	11.5	1/16	0.75	CR-11.5NPT-4I	●	16	15.7	5.2	CR-8R / 10R-3I / 4I-CB
	8	1/16	0.75	CR-8NPT-4I	●	16	15.7	5.2	CR-8R / 10R-3I / 4I-CB


● : Line up

Chaser

TUNGTHREAD

CR-3E-#1_3


Chaser inserts for tool rotating machines

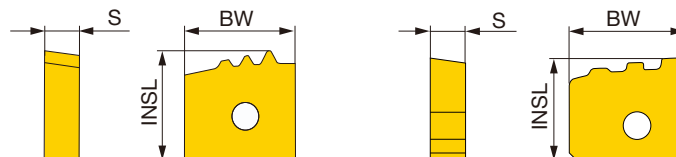

Connection	TPI	Taper		Designation	AH725	BW	INSL	S	Breakerpiece
		mm/mm	TPF						
API Round	8	1/16	0.75	CR-8R-3E #1	●	16	14.7	5.2	TD39318R-1-CBW/CAVITY
	8	1/16	0.75	CR-8R-3E #2	●	16	14.9	5.2	TD39328R-2-CBW/CAVITY
	8	1/16	0.75	CR-8R-3E #3	●	16	15	5.2	TD39338R-3-CBW/CAVITY
API Buttress	5	1/16	0.75	CR-5B75-3E #1	●	17	14.6	5.2	TD46015B75-1-CBW/CAVITY
	5	1/16	0.75	CR-5B75-3E #2	●	17	14.8	5.2	TD46025B75-2-CBW/CAVITY
	5	1/16	0.75	CR-5B75-3E #3	●	17	15	5.2	TD46035B75-3-CBW/CAVITY

● : Line up

Check our site and our App to get more info!

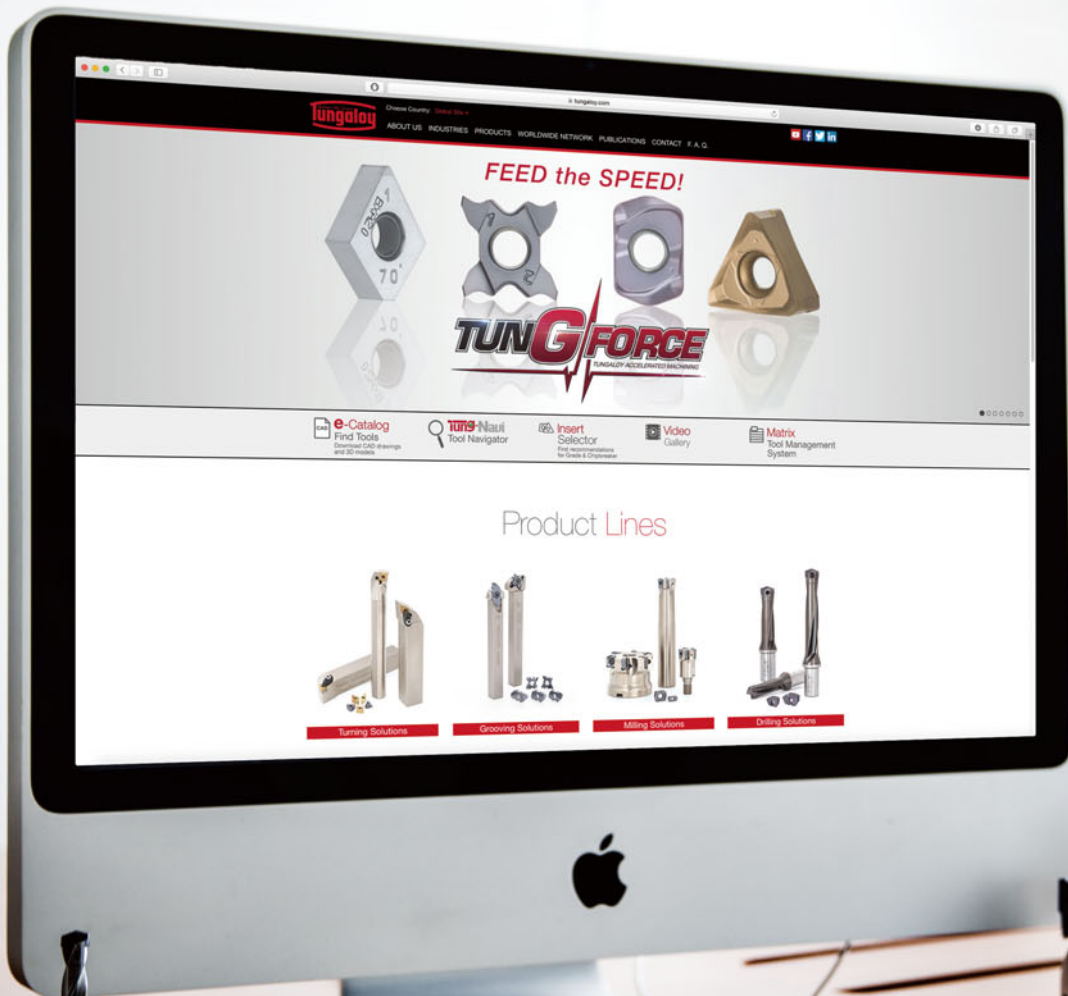

Available on the App Store



GET IT ON Google play



Available on the App Store



GET IT ON Google play

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima, 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloyamerica.com

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy de Mexico S.A.

C Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.de

Tungaloy France S.A.S.

ZA Courtaboeuf - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboeuf Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
www.tungaloy.se

Tungaloy Rus, LLC

115432, Moscow, Andropov Avenue, 18,
building 7, 11th floor (office 3). Metro station
"Technopark". Business center «I-Land».
Phone: +7-499-683-01-80/81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

ul. Genewska 24
03-963 Warszawa, Poland
Phone: +48-22-617-0890
Fax: +48-22-617-0890
www.tungaloy.com/pl

Tungaloy U.K. Ltd

The Technology Centre,
Wolverhampton Science Park
Glaisher Drive, Wolverhampton
West Midlands WV10 9RU, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk
salesinfo@tungaloyuk.co.uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu
info@tungaloytools.hu

Tungaloy Turkey

Dudullu OSB 4. Cad No:4
34776 Umraniye Istanbul, TURKEY
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com.tr
info@tungaloy.com.tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy-benelux.com

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430 Samobor
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.hr

Tungaloy Cutting Tool (Shanghai) Co.,Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.co.th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/sg

Tungaloy Vietnam

LE 04-38, Lexington Residence
67 Mai Chi Tho, Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-8-37406660
Fax: +84-8-37406662
www.tungaloy.com/sg

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai -400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

PO Box 2232, 68/1470
Ferntree Gully Road, Knoxfield
Victoria 3180, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com.au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



www.tungaloy.com

follow us at:

facebook.com/tungaloyjapan

twitter.com/tungaloyjapan

To see this product in action visit:

Tung-TV

www.youtube.com/tungaloycorporation

Distributed by:



DOWNLOAD
Dr. Carbide App



Available on the
App Store



GET IT ON
Google play

FIND US ON THE CLOUD!
machiningcloud.com



AS9100 Certified
78006
2015.11.04
ISO14001 Certified
EC97J1123
1997.11.26

Produced from Recycled paper

Nov. 2020 (TJ)