

MillLine



TUNG-ALUMILL

www.tungaloy.com

Tungaloy Report No. 429-G

Shoulder mill that enables high speed machining of aluminum and non-ferrous materials now has **R2.5 inserts**



INDUSTRY 4.0
FEED the SPEED!



Tungalou

EPV16R025M25
Max. RPM: 38000
R. 85191

ACCELERATED MACHINING

MillLine

TUNG-ALUMILL

TUNGALOY




V-shaped bottom secures insert on the cutter and supports **high speed machining as well as helical ramping!**

Outstanding productivity in demanding applications, such as high helical ramping, straight ramping and step milling!

Secure, stable insert clamping design with unique V-shaped bottom

V shape provides counter force against the cutting force and centrifugal force to stabilize the insert

■ V-shaped insert bottom

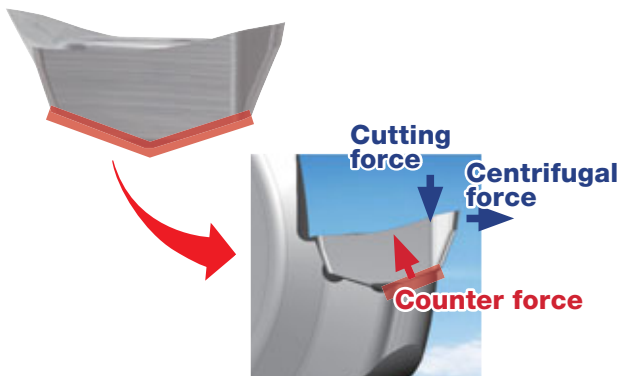

Exceptional productivity is achieved with high cutting speeds (V_c) of up to 5000 m/min.


V-shaped clamping restricts insert movement even during high ramp machining and reduces shear force on the screw

■ FE analysis


Cutters	TUNG-ALUMILL V-shaped design	General type
Insert movement (down cutting)	3.0 μm	10.5 μm
Stress on the screw	100%	120%

Milling cutter : EPV16R032M32.0-02 ($\phi 32$, $z = 2$)
 Insert : XVCT160508R-AJ TH10
 Workpiece : Aluminium alloy
 Cutting speed : $V_c = 2000$ m/min
 Feed per tooth : $f_z = 0.15$ mm/t
 Depth of cut : $a_p = 5$ mm
 Width of cut : $a_e = 10$ mm

Special features of the insert pocket

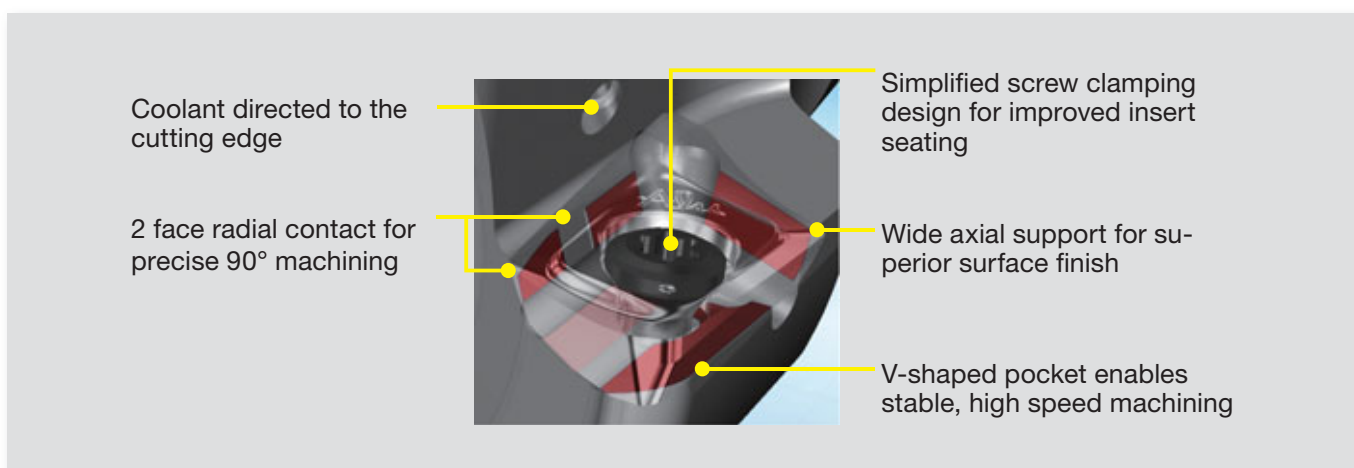


Excellent cutting edge geometry for aluminum and non-ferrous materials

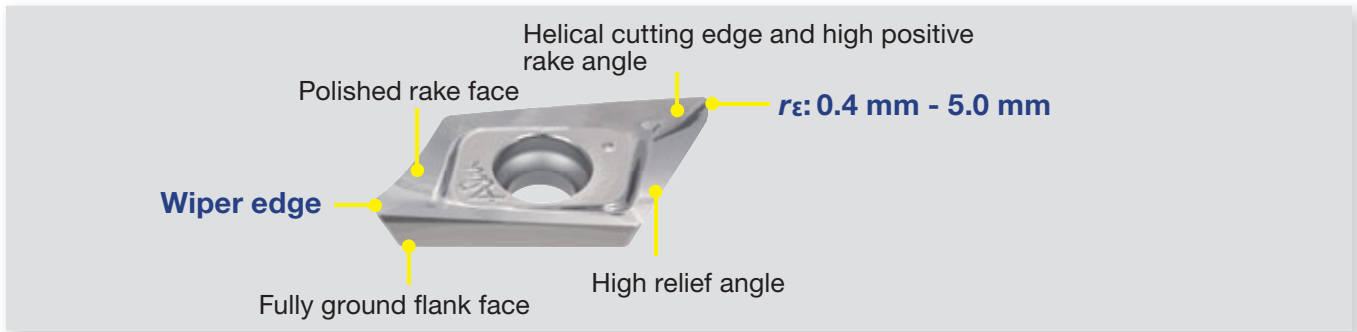


- High positive, polished rake face prevents cutting edge built-up
- High cutting edge clearance allows steep ramping

Comparison of maximum ramping angle

Tool diameter øDc: ø40 mm	TUNG-ALUMILL	Competitor		
		A	B	C
Max. ramping angle θ	11.5°	11°	9°	9°

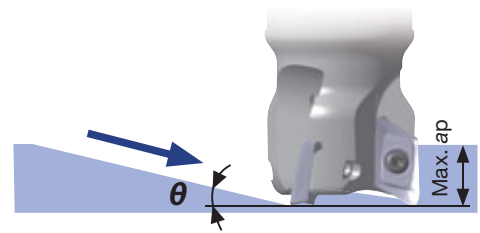


Applicable for a wide range of machining

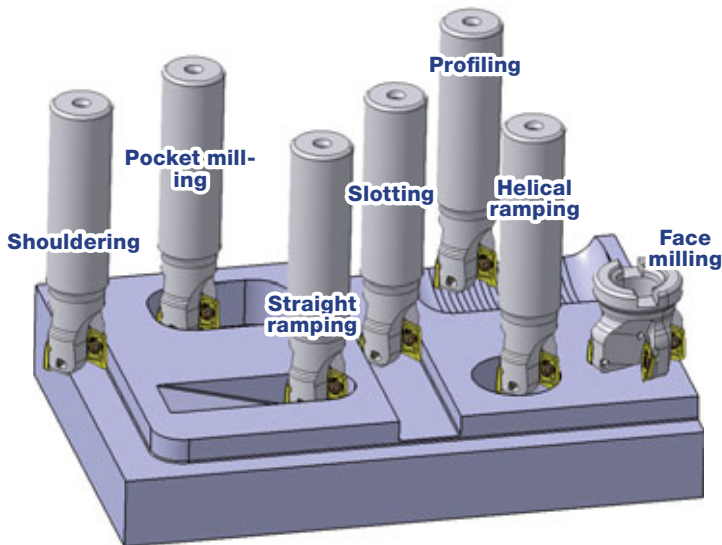



Target application

- Where productivity needs to be increased while maintaining accurate machining and high surface quality
- Components that require high precision, such as aerospace frame parts

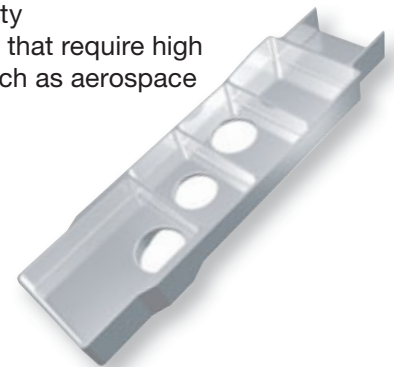

Excellent surface finish for both roughing and finishing


Comparison of surface roughness

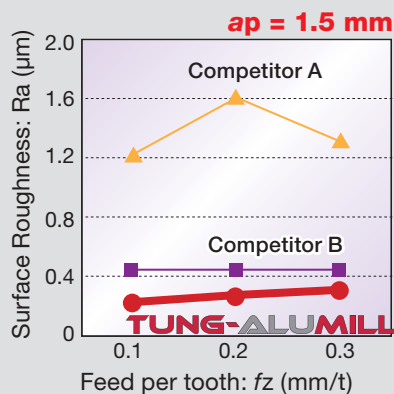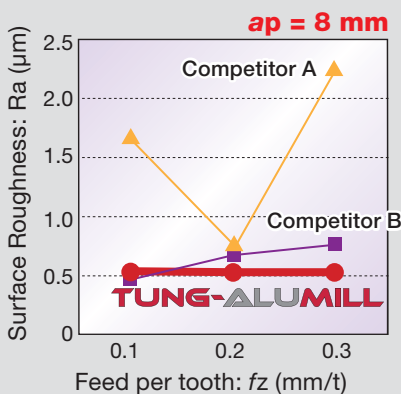

Milling cutter : EPV16R032M32.0-02
(ø32, z = 2)
Insert : XVCT160508R-AJ TH10
Workpiece : Aluminium alloy
Cutting speed : Vc = 600 m/min
Width of cut : ae = 25 mm

TPV16

90° shoulder mill for aluminium machining, with screw clamp system, for XVCT16 inserts

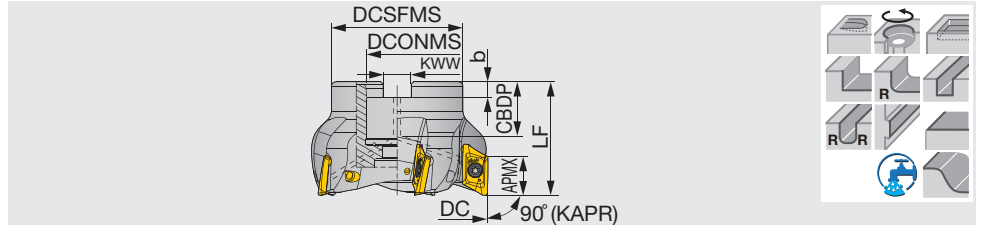

Designation	DC	CICT	DCSFMS	DCONMS	CBDP	LF	b	KWW	WT(kg)	Air hole	Max. RPM (min ⁻¹)	Insert
TPV16R040M16.0E03	40	3	38	16	20	50	5.6	8.4	0.23	With	30,000	XVCT1605...
TPV16R050M22.0E04	50	4	45	22	22	50	6.3	10.4	0.33	With	27,000	XVCT1605...
TPV16R063M22.0E05	63	5	47	22	22	50	6.3	10.4	0.54	With	24,000	XVCT1605...
TPV16R080M27.0E05	80	5	58	27	28	50	7	12.4	0.86	With	21,000	XVCT1605...
TPV16R100M32.0E06	100	6	66	32	26	63	8	14.4	1.55	With	19,000	XVCT1605...
TPV16R125M40.0E07	125	7	85	40	32	63	9	16.4	2.53	With	17,000	XVCT1605...

SPARE PARTS




Designation	Clamping screw	Grip	Shell locking bolt	Torx bit
TPV16R040M16.0E03	TS40093I/HG	H-TBS	SHM8X1.25X35-C	BT15S
TPV16R050 - 063...	TS40093I/HG	H-TBS	SHM10X1.5X30-C	BT15S
TPV16R080M27.0E05	TS40093I/HG	H-TBS	LHM12X1.75X30-C	BT15S
TPV16R100M32.0E06	TS40093I/HG	H-TBS	SHM16X2X35-C	BT15S
TPV16R125M40.0E07	TS40093I/HG	H-TBS	SHM20X2.5X40-C	BT15S

*Recommended clamping torque (N-m) : TS40093I/HG=3.5

EPV16

90° shoulder endmill for aluminium machining, shank type, with screw clamp system, for XVCT16 inserts

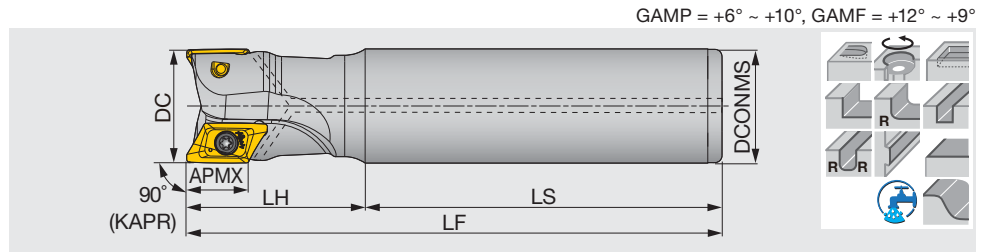

Designation	DC	CICT	DCONMS	LS	LH	LF	WT(kg)	Air hole	Max. RPM (min ⁻¹)	Insert
EPV16R025M25.0-02	25	2	25	70	55	125	0.37	With	38,000	XVCT1605...
EPV16R025M25.0-02L	25	2	25	100	70	170	0.53	With	38,000	XVCT1605...
EPV16R032M32.0-02	32	2	32	100	50	150	0.77	With	34,000	XVCT1605...
EPV16R032M32.0-02L	32	2	32	120	80	200	1.03	With	34,000	XVCT1605...
EPV16R032M32.0-03	32	3	32	100	50	150	0.76	With	34,000	XVCT1605...
EPV16R032M32.0-03L	32	3	32	120	80	200	1.03	With	34,000	XVCT1605...
EPV16R040M32.0-03	40	3	32	120	50	170	0.94	With	30,000	XVCT1605...
EPV16R040M32.0-03L	40	3	32	195	55	250	1.43	With	30,000	XVCT1605...

SPARE PARTS




Designation	Clamping screw	Grip	Torx bit
EPV16R025M...	TS40085I/HG	H-TBS	BT15S
EPV16R032M...	TS40093I/HG	H-TBS	BT15S
EPV16R040M...	TS40093I/HG	H-TBS	BT15S

*Recommended clamping torque (N·m) : TS40085I/HG=3.5, TS40093I/HG=3.5

INSERTS

XVCT16-AJ



P Steel									
M Stainless									
K Cast iron									
N Non-ferrous		★							
S Superalloys									
H Hard materials									


★ : First choice
☆ : Second choice

Designation	RE	APMX	Uncoated								LE	IC	S	BS	
			TH10												
XVCT160504R-AJ	0.4	16	●									22.2	11.2	5.9	1.3
XVCT160508R-AJ	0.8	16	●									22.2	11.2	5.9	1
XVCT160512R-AJ	1.2	15.5	●									21.7	11.2	5.8	1
XVCT160516R-AJ	1.6	15	●									21.2	11.2	5.75	1
XVCT160520R-AJ	2	14.5	●									20.8	11.2	5.75	1
New XVCT160525R-AJ	2.5	14	●									20.33	11.23	5.68	1
XVCT160530R-AJ	3	14	●									19.5	11.2	5.6	1
XVCT160532R-AJ	3.2	14	●									19.2	11.2	5.6	1
XVCT160540R-AJ	4	13	●									18.4	11.2	5.5	1.2
XVCT160550R-AJ	5	13	●									18.4	11.2	5.4	0.4

* When using inserts with corner radius RE ≥ 3.2 mm, standard cutter body has to be modified with "R". "R" = RE - 0.3 mm

● : New
● : Line up

MACHINING APPLICATIONS

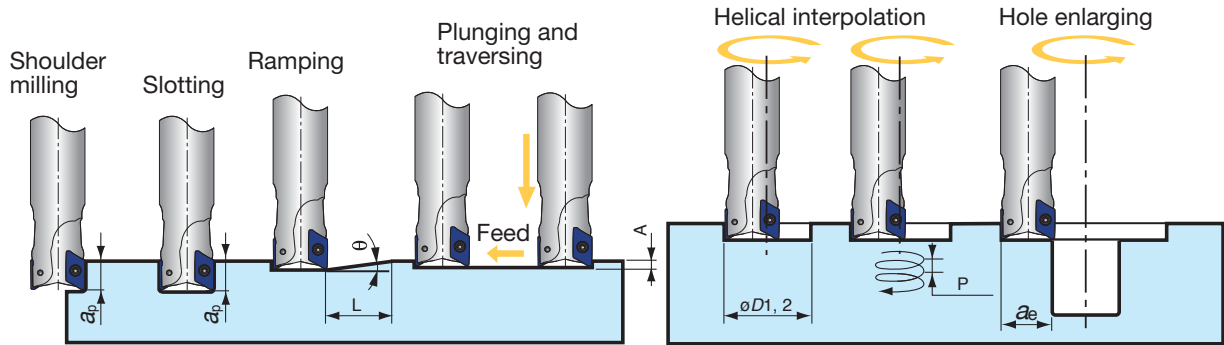

Straight ramp down Step down

Helical ramp down

Hole enlarging

Designation	DC	Corner radius r_ϵ	Max. depth of cut APMX	Max. ramping angle RMPX	Min. length L	Straight ramp down		Helical ramp down		Max. machining pitvh/rev	Max. width
						Max. plunging A	Min. machining $\phi D1$	Min. pitch/rev P	Max. machining $\phi D2$		
EPV16R025...	25	0.4, 0.8	16	22°	40	4.2	29.1	4.4	50	13.6	22.5
EPV16R025...	25	1.2	15.5	22°	40	4.2	29.1	4.4	50	13.6	22.5
EPV16R025...	25	1.6	15	22°	38	3.7	29.1	4.4	50	13.2	22.5
EPV16R025...	25	2.0	14.5	22°	38	3.7	29.1	4.4	50	13.2	22.5
EPV16R025...	25	2.5, 3.0, 3.2	14	21°	38	2.5	29.1	4.2	50	12.3	22.5
EPV16R025...	25	4.0, 5.0	13	18.5°	40	2.3	29.1	3.7	50	12.3	22.5
EPV16R032...	32	0.4, 0.8	16	16.5°	54	4	43.1	8.8	64	13.6	28.8
EPV16R032...	32	1.2	15.5	16.5°	54	4	43.1	8.8	64	13.6	28.8
EPV16R032...	32	1.6	15	16°	54	3.5	43.1	8.5	64	13.2	28.8
EPV16R032...	32	2.0	14.5	16°	54	3.5	43.1	8.5	64	13.2	28.8
EPV16R032...	32	2.5, 3.0, 3.2	14	15°	54	3	43.1	7.9	64	12.3	28.8
EPV16R032...	32	4.0, 5.0	13	13.5°	56	2.5	43.1	7.1	64	12.3	28.8
T/EPV16R040...	40	0.4, 0.8	16	11.5°	79	4	59.1	10.4	80	13.6	36
T/EPV16R040...	40	1.2	15.5	11.5°	79	4	59.1	10.4	80	13.6	36
T/EPV16R040...	40	1.6	15	11°	80	3.5	59.1	9.9	80	13.2	36
T/EPV16R040...	40	2.0	14.5	11°	80	3.5	59.1	9.9	80	13.2	36
T/EPV16R040...	40	2.5, 3.0, 3.2	14	10°	82	3	59.1	9	80	12.3	36
T/EPV16R040...	40	4.0, 5.0	13	8.5°	90	2.5	59.1	7.6	80	12.3	36
TPV16R050...	50	0.4, 0.8	16	9.5°	96	4	79.1	13	100	13.6	45
TPV16R050...	50	1.2	15.5	9.5°	96	4	79.1	13	100	13.6	45
TPV16R050...	50	1.6	15	9°	98	3.5	79.1	12.3	100	13.2	45
TPV16R050...	50	2.0	14.5	9°	98	3.5	79.1	12.3	100	13.2	45
TPV16R050...	50	2.5, 3.0, 3.2	14	8°	103	3	79.1	10.9	100	12.3	45
TPV16R050...	50	4.0, 5.0	13	7°	110	2.5	79.1	9.5	100	12.3	45
TPV16R063...	63	0.4, 0.8	16	7°	130	4	105.1	13.6	126	13.6	56.7
TPV16R063...	63	1.2	15.5	7°	130	4	105.1	13.6	126	13.6	56.7
TPV16R063...	63	1.6	15	6.5°	136	3.5	105.1	12.8	126	13.2	56.7
TPV16R063...	63	2.0	14.5	6.5°	136	3.5	105.1	12.8	126	13.2	56.7
TPV16R063...	63	2.5, 3.0, 3.2	14	6°	136	3	105.1	11.8	126	12.3	56.7
TPV16R063...	63	4.0, 5.0	13	5.5°	140	2.5	105.1	10.8	126	12.3	56.7
TPV16R080...	80	0.4, 0.8	16	5°	183	4	139.1	13.6	160	13.6	72
TPV16R080...	80	1.2	15.5	5°	183	4	139.1	13.6	160	13.6	72
TPV16R080...	80	1.6	15	4.5°	197	3.5	139.1	12.4	160	13.2	72
TPV16R080...	80	2.0	14.5	4.5°	197	3.5	139.1	12.4	160	13.2	72
TPV16R080...	80	2.5, 3.0, 3.2	14	4°	207	3	139.1	11	160	12.3	72
TPV16R080...	80	4.0, 5.0	13	3.5°	221	2.5	139.1	9.6	160	12.3	72
TPV16R100...	100	0.4, 0.8	16	3.5°	262	4	179.1	12.9	200	13.6	90
TPV16R100...	100	1.2	15.5	3.5°	262	4	179.1	12.9	200	13.6	90
TPV16R100...	100	1.6	15	3°	296	3.5	179.1	11.1	200	13.2	90
TPV16R100...	100	2.0	14.5	3°	296	3.5	179.1	11.1	200	13.2	90
TPV16R100...	100	2.5, 3.0, 3.2	14	2.5°	332	3	179.1	9.2	200	12.3	90
TPV16R100...	100	4.0, 5.0	13	2.5°	309	2.5	179.1	9.2	200	11.6	90
TPV16R125...	125	0.4, 0.8	16	2.5°	367	4	229.1	12.1	225	13.6	112.5
TPV16R125...	125	1.2	15.5	2.5°	367	4	229.1	12.1	225	13.6	112.5
TPV16R125...	125	1.6	15	2°	444	3.5	229.1	9.7	225	13.2	112.5
TPV16R125...	125	2.0	14.5	2°	444	3.5	229.1	9.7	225	13.2	112.5
TPV16R125...	125	2.5, 3.0, 3.2	14	1.5°	554	3	229.1	7.3	225	8.7	112.5
TPV16R125...	125	4.0, 5.0	13	1.5°	516	2.5	229.1	7.3	225	8.7	112.5

STANDARD CUTTING CONDITIONS

ISO	Workpiece material	Hardness HB	Grade	Chip-breaker	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
N	Aluminium alloy	60	TH10	AJ	300 - 5000	0.15 - 0.35
		100	TH10	AJ	200 - 2000	0.1 - 0.25
	Cast aluminium alloy Si ≤ 12%	75	TH10	AJ	200 - 2000	0.15 - 0.3
		90	TH10	AJ	200 - 1500	0.1 - 0.25
	Cast aluminium alloy Si > 12%	130	TH10	AJ	200 - 1000	0.07 - 0.15
	Copper alloys Pb > 1%	110	TH10	AJ	200 - 800	0.07 - 0.15
	Copper alloys	90	TH10	AJ	300 - 1000	0.1 - 0.15
		100	TH10	AJ	300 - 800	0.1 - 0.15
	Duroplastics, fiber plastics	-	TH10	AJ	100 - 500	0.1 - 0.15
	Hard rubber	-	TH10	AJ	100 - 300	0.1 - 0.15

Safety guidelines





1. Use only the original inserts, cutters and spare parts.
2. Insert pocket must be cleaned before clamping the insert.
3. Clamp torque of screw should be 4.5 N·m.
4. For safety reasons, use a new screw when changing the insert.
5. Maximum RPM values are determined based on the burst test. Using RPM beyond maximum values may cause insert breakage, machine damage or personal injury.
6. XVCT insert has sharp cutting edges. Always wear gloves for protection from injury when handling.

ACCELERATED MACHINING


Tool dia.: DC (mm), Number of revolutions : n (min^{-1}), Feed speed : V_f (mm/min), Max depth of cut $a_p = 2.0$ mm, Number of inserts : z

$\phi 25$		$\phi 32$		$\phi 40$		$\phi 50$		$\phi 63$		$\phi 80$		$\phi 100$		$\phi 125$			
$z = 2$		$z = 2$		$z = 3$		$z = 3$		$z = 4$		$z = 5$		$z = 5$		$z = 6$		$z = 7$	
n	V_f	n	V_f	n	V_f	n	V_f	n	V_f	n	V_f	n	V_f	n	V_f	n	V_f
19100	9600	14900	7500	14900	11200	11900	8900	9500	9500	7600	9500	6000	7500	4800	7200	3800	6700
Vc = 1500m/min, fz = 0.25 mm/t																	
12700	5100	9900	4000	9900	5900	8000	4800	6400	5100	5100	5100	4000	4000	3200	3800	2500	3500
Vc = 1000 m/min, fz = 0.2 mm/t																	
12700	5100	9900	4000	9900	5900	8000	4800	6400	5100	5100	5100	4000	4000	3200	3800	2500	3500
Vc = 1000 m/min, fz = 0.2 mm/t																	
10200	3100	8000	2400	8000	3600	6400	2900	5100	3100	4000	3000	3200	2400	2500	2300	2000	2100
Vc = 800 m/min, fz = 0.15 mm/t																	
7600	1500	6000	1200	6000	1800	4800	1400	3800	1500	3000	1500	2400	1200	1900	1100	1500	1100
Vc = 600 m/min, fz = 0.1 mm/t																	
6400	1300	5000	1000	5000	1500	4000	1200	3200	1300	2500	1300	2000	1000	1600	1000	1300	900
Vc = 500 m/min, fz = 0.1 mm/t																	
7600	1800	6000	1400	6000	2200	4800	1700	3800	1800	3000	1800	2400	1400	1900	1400	1500	1300
Vc = 600 m/min, fz = 0.12 mm/t																	
6400	1500	5000	1200	5000	1800	4000	1400	3200	1500	2500	1500	2000	1200	1600	1200	1300	1100
Vc = 500 m/min, fz = 0.12 mm/t																	
3800	900	3000	700	3000	1100	2400	900	1900	900	1500	900	1200	700	1000	700	800	700
Vc = 300 m/min, fz = 0.12 mm/t																	
2500	600	2000	500	2000	700	1600	600	1300	600	1000	600	800	500	600	400	500	400
Vc = 200 m/min, fz = 0.12 mm/t																	


PRACTICAL EXAMPLES

Workpiece type		Airplane part	Airplane part
Cutter		TPV16R050M22.0E04 (ø50, z = 4)	EPV16R032M32.0-03 (ø32, z = 3)
Insert		XVCT160504R-AJ	XVCT160530R-AJ
Grade		TH10	TH10
Workpiece material		A7050 / AlZn5.5MgCu	A7050 / AlZn5.5MgCu
Cutting conditions			
Cutting speed : Vc (m/min)		2200	900
Feed per tooth : fz (mm/t)		0.17	0.3
Depth of cut : ap (mm)		5.2	30
Width of cut : ae (mm)		35	25
Machining		Pocket milling	Pocket milling
Coolant		Wet	Wet
Machine		Vertical M/C, BT50	Vertical M/C, BT50
Results		 <p>N</p> <p>Number of workpiece (pcs./corner)</p> <p>8 (TUNG-ALUMILL) vs 4 (Competitor)</p> <p>Tool life 2 times!</p> <p>Excellent sharpness drastically reduces cutting force, achieving longer tool life.</p>	 <p>N</p> <p>Feed speed Vf (mm/min)</p> <p>8000 (TUNG-ALUMILL) vs 7200 (Competitor)</p> <p>Productivity 1.1 times!</p> <p>Lower cutting force allows higher feed machining, providing higher productivity.</p>
Workpiece type		Robot component	Robot component
Cutter		EPV16R025M25.0-02 (ø25, z = 2)	TPA10R063M22.0E06 (ø63 mm, z = 6)
Insert		XVCT160504R-AJ	TOMT100408PDER-MJ
Grade		TH10	T1215
Workpiece material		A6061 / AlMg1AlCu	Aluminium alloy
Cutting conditions			
Cutting speed : Vc (m/min)		780	196
Feed per tooth : fz (mm/t)		0.15	0.15
Depth of cut : ap (mm)		10	900
Width of cut : ae (mm)		25	2.5
Machining		Pocket milling	Slot milling
Coolant		Wet	Wet
Machine		Vertical M/C, BT40	Vertical M/C, BT50
Results		 <p>N</p> <p>Feed speed Vf (mm/min)</p> <p>3000 (TUNG-ALUMILL) vs 2400 (Competitor)</p> <p>Productivity 1.25 times!</p> <p>Due to rigid clamping, excellent surface finish can be achieved even with higher feed rates.</p>	 <p>N</p> <p>Feed speed Vf (mm/min)</p> <p>3000 (TUNG-ALUMILL) vs 2300 (Competitor)</p> <p>Productivity 1.3 times!</p> <p>Sharp cutting edge reduces cutting force. This feature allows the feed to be increased and achieves high productivity.</p>



MEMO

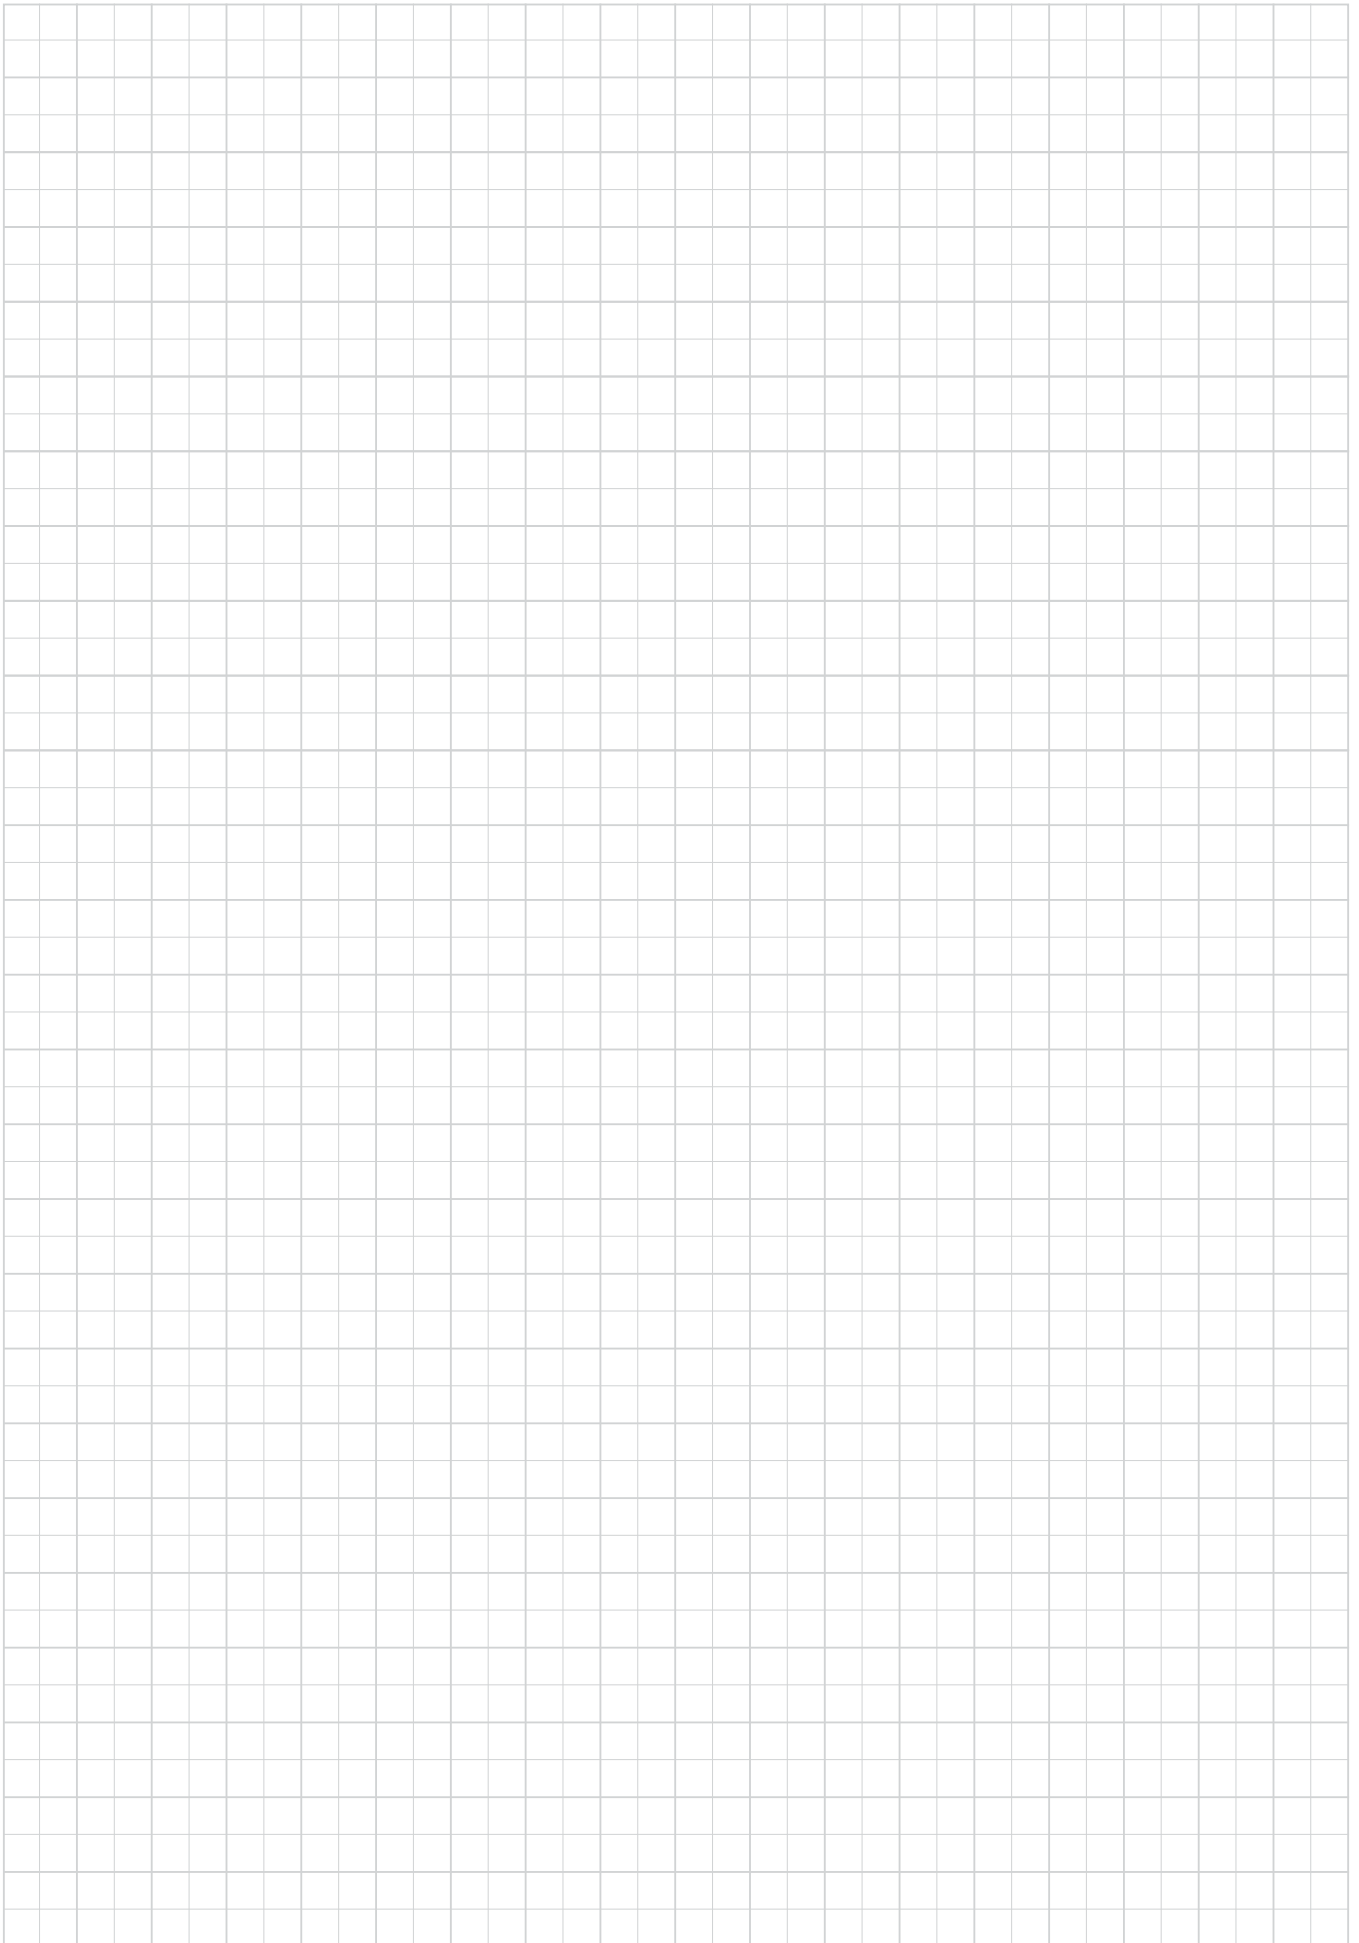A large grid of graph paper, consisting of 20 columns and 30 rows of small squares, intended for writing a memo. The grid is empty and occupies most of the page.

MEMO

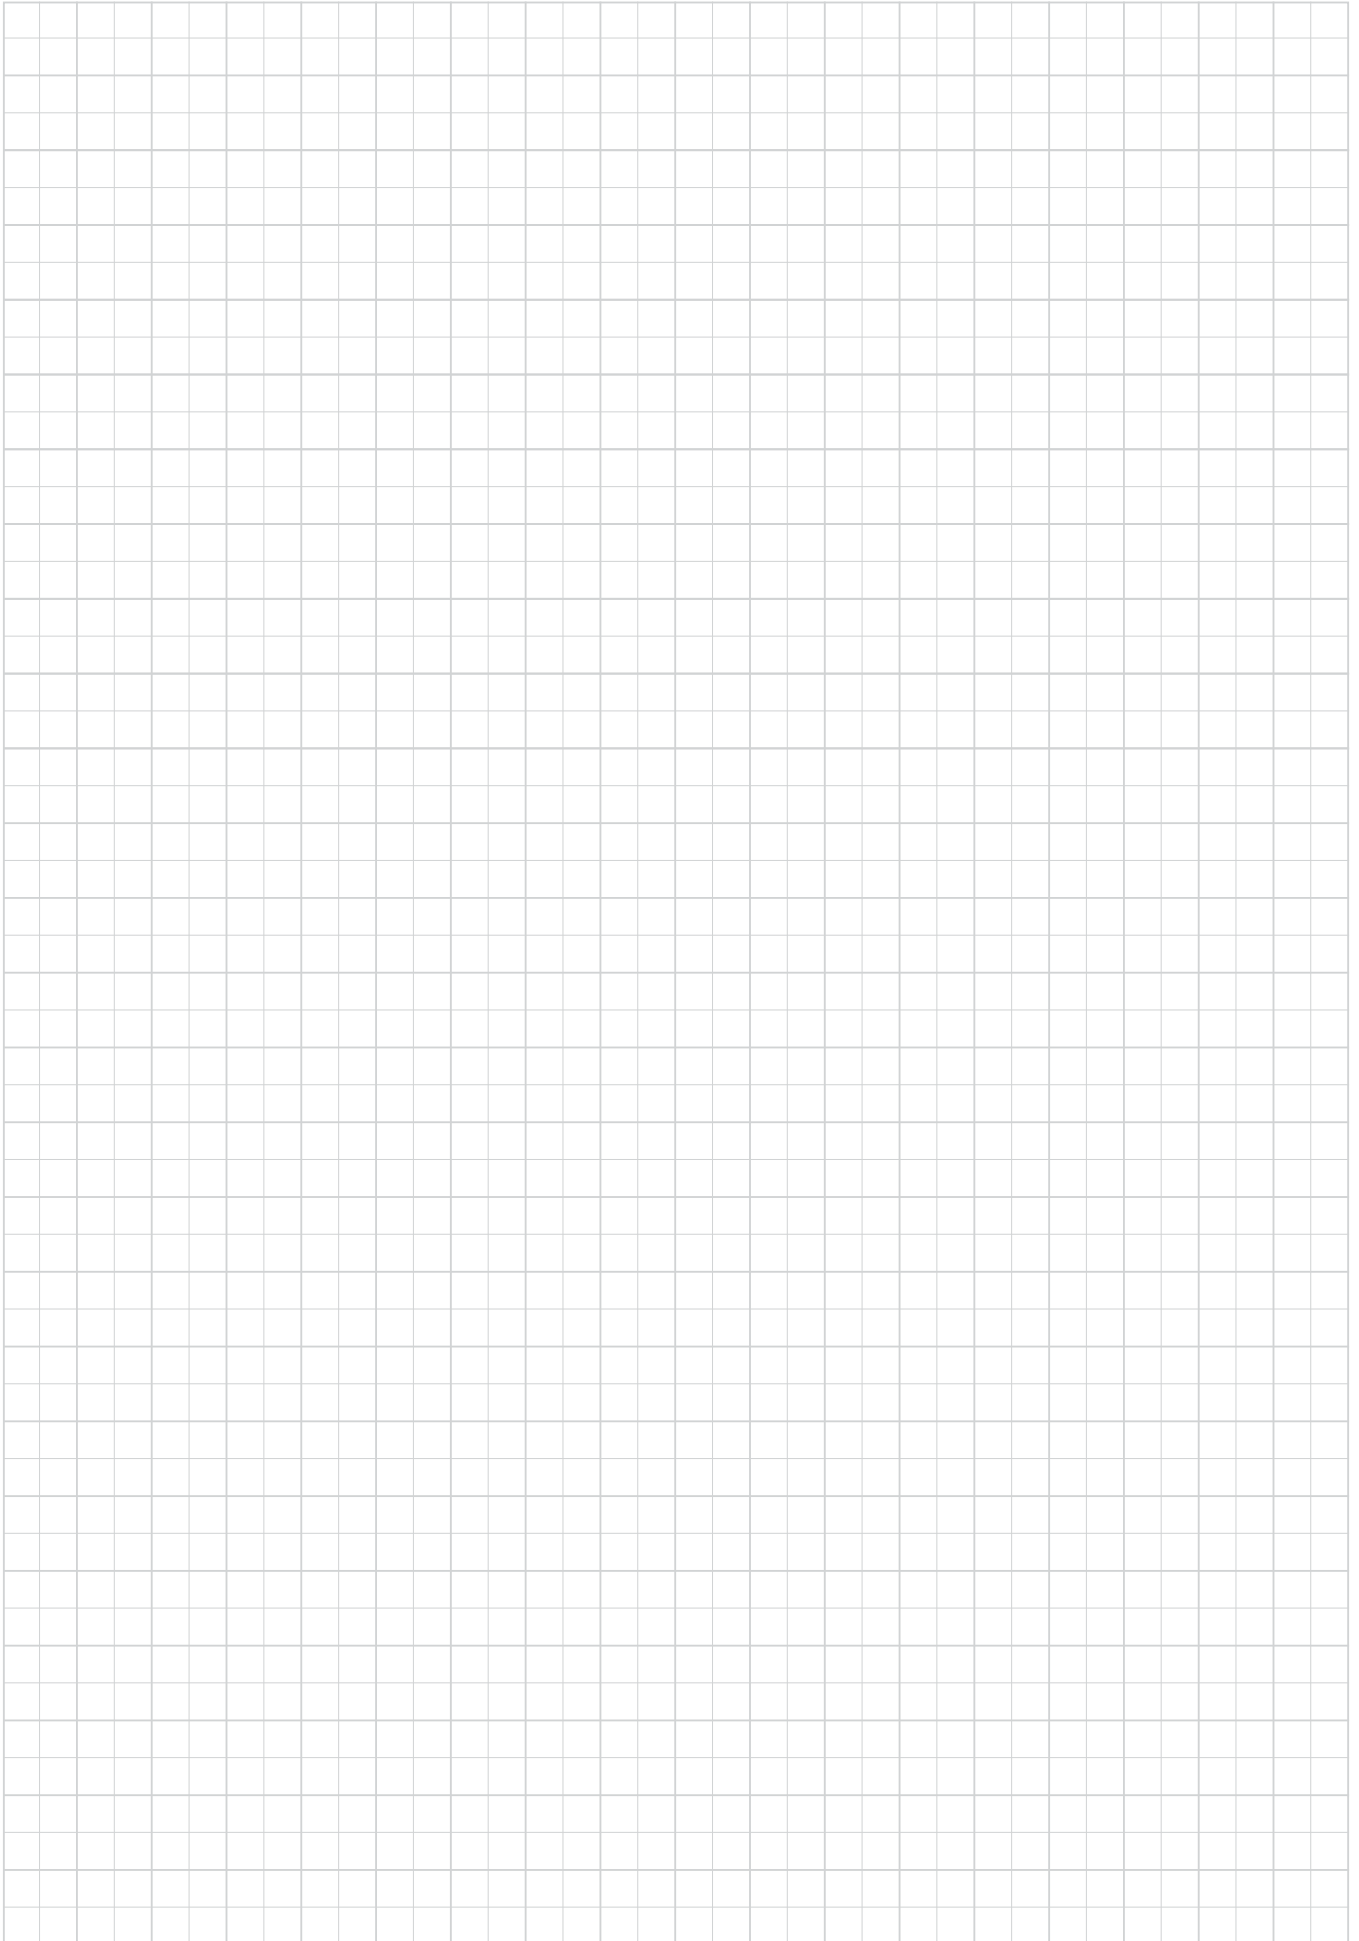A large grid of graph paper for taking notes, consisting of 20 columns and 30 rows of small squares.

Check our site and our App to get more info!

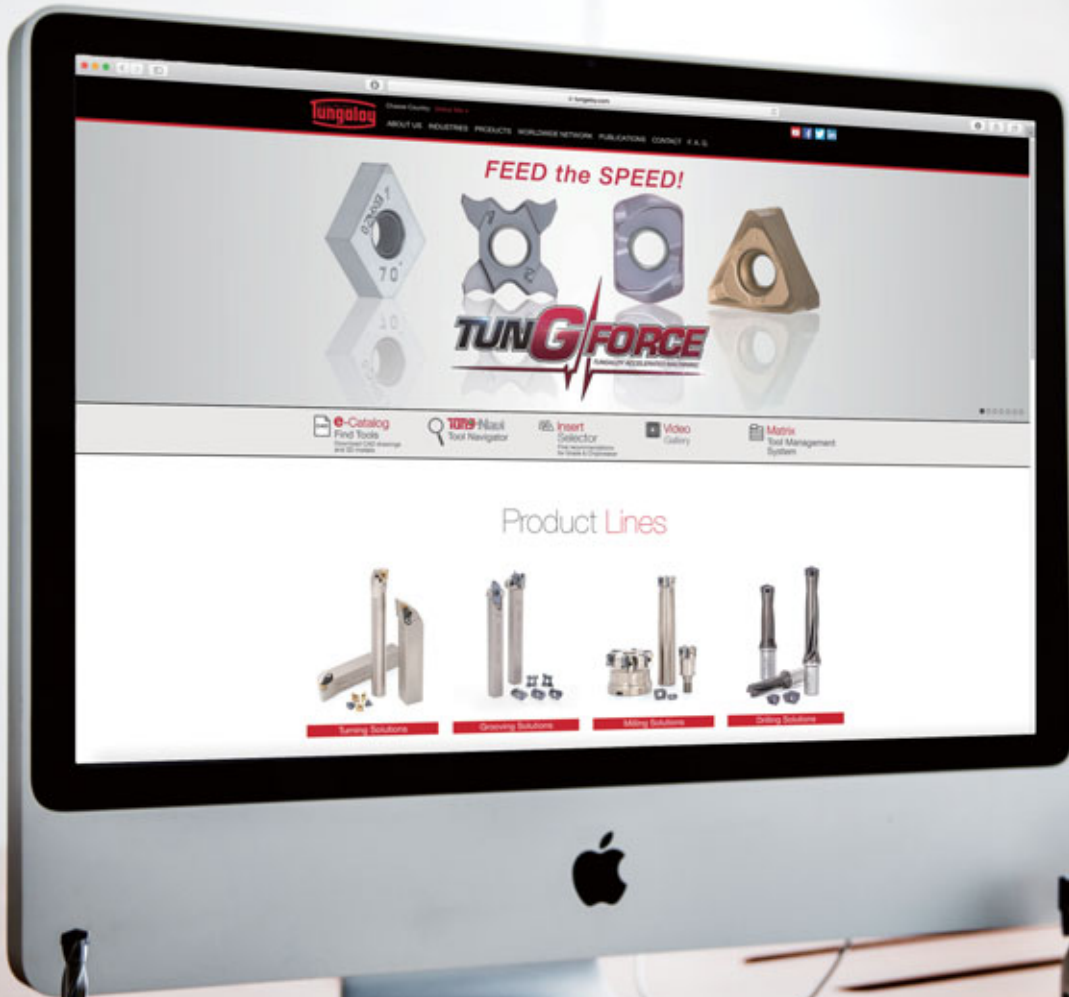

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima, 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloyamerica.com

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.co.jp/ca

Tungaloy de Mexico S.A.

C Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.co.jp/mx

Tungaloy do Brasil Ltda.

Rua dos Sabias N.104
13280-000 Vinhedo, São Paulo, Brazil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.de

Tungaloy France S.A.S.

ZA Courtaboeuf - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboeuf Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.es

Tungaloy Scandinavia AB

S:t Lars Väg 42A
SE-22270 Lund, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.se

Tungaloy Rus, LLC

36-D Harkovsky Lane
308009 Belgorod, Russia
Phone: +7 4722 24 00 07
Fax: +7 4722 24 00 08
www.tungaloy.co.jp/ru

Tungaloy Polska Sp. z o.o.

ul. Genewska 24
03-963 Warszawa, Poland
Phone: +48-22-617-0890
Fax: +48-22-617-0890
www.tungaloy.co.jp/pl

Tungaloy U.K. Ltd

The Technology Centre,
Wolverhampton Science Park
Glaisher Drive, Wolverhampton
West Midlands WV10 9RU, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.co.jp/uk
salesinfo@tungaloyuk.co.uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.co.jp/hu
info@tungaloytools.hu

Tungaloy Turkey

Dudullu OSB 4. Cad No:4
34776 Umraniye Istanbul, TURKEY
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com.tr
info@tungaloy.com.tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy-benelux.com

Tungaloy Croatia

Josipa Kozarca 4
10432 Bregana, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.hr

Tungaloy Cutting Tool (Shanghai) Co.,Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.co.jp/tcts

Tungaloy Cutting Tool (Thailand) Co.,Ltd.

TCIF Tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.co.th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.co.jp/tspl

Tungaloy Vietnam

Unit 18, 4th Fl. Saigon Centre Building
65 Le Loi Blvd.
Dist 1, Ho Chi Minh City, Vietnam
Phone: +84-8-3827-0201
Fax: +84-8-3827-0203
www.tungaloy.co.jp/tspl

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai-400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.co.jp/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.co.jp/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.co.jp/my

Tungaloy Australia Pty Ltd

PO Box 2232, Rowville,
Victoria 3178, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com.au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.co.jp/id



www.tungaloy.com

follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan

To see this product in action visit:

Tung-TV

www.youtube.com/tungaloycorporation

Distributed by:



DOWNLOAD
Dr.Carbide App



Available on the
App Store



GET IT ON
Google play



ISO 9001 Certified
QC00J0056
Tungaloy Corporation
18/10/1996

ISO 14001 Certified
EC97J1123
Tungaloy Group
Japan site and Asian
production site
26/11/1997