

MillLine

DOREC

www.tungaloy.com


Tungaloy Report No. 390-G

Member IMC Group
Tungaloy

Strong, Free-cutting Edges **Guarantee Maximum Machining Efficiency and Stability**



INDUSTRY 4.0
FEED the SPEED!

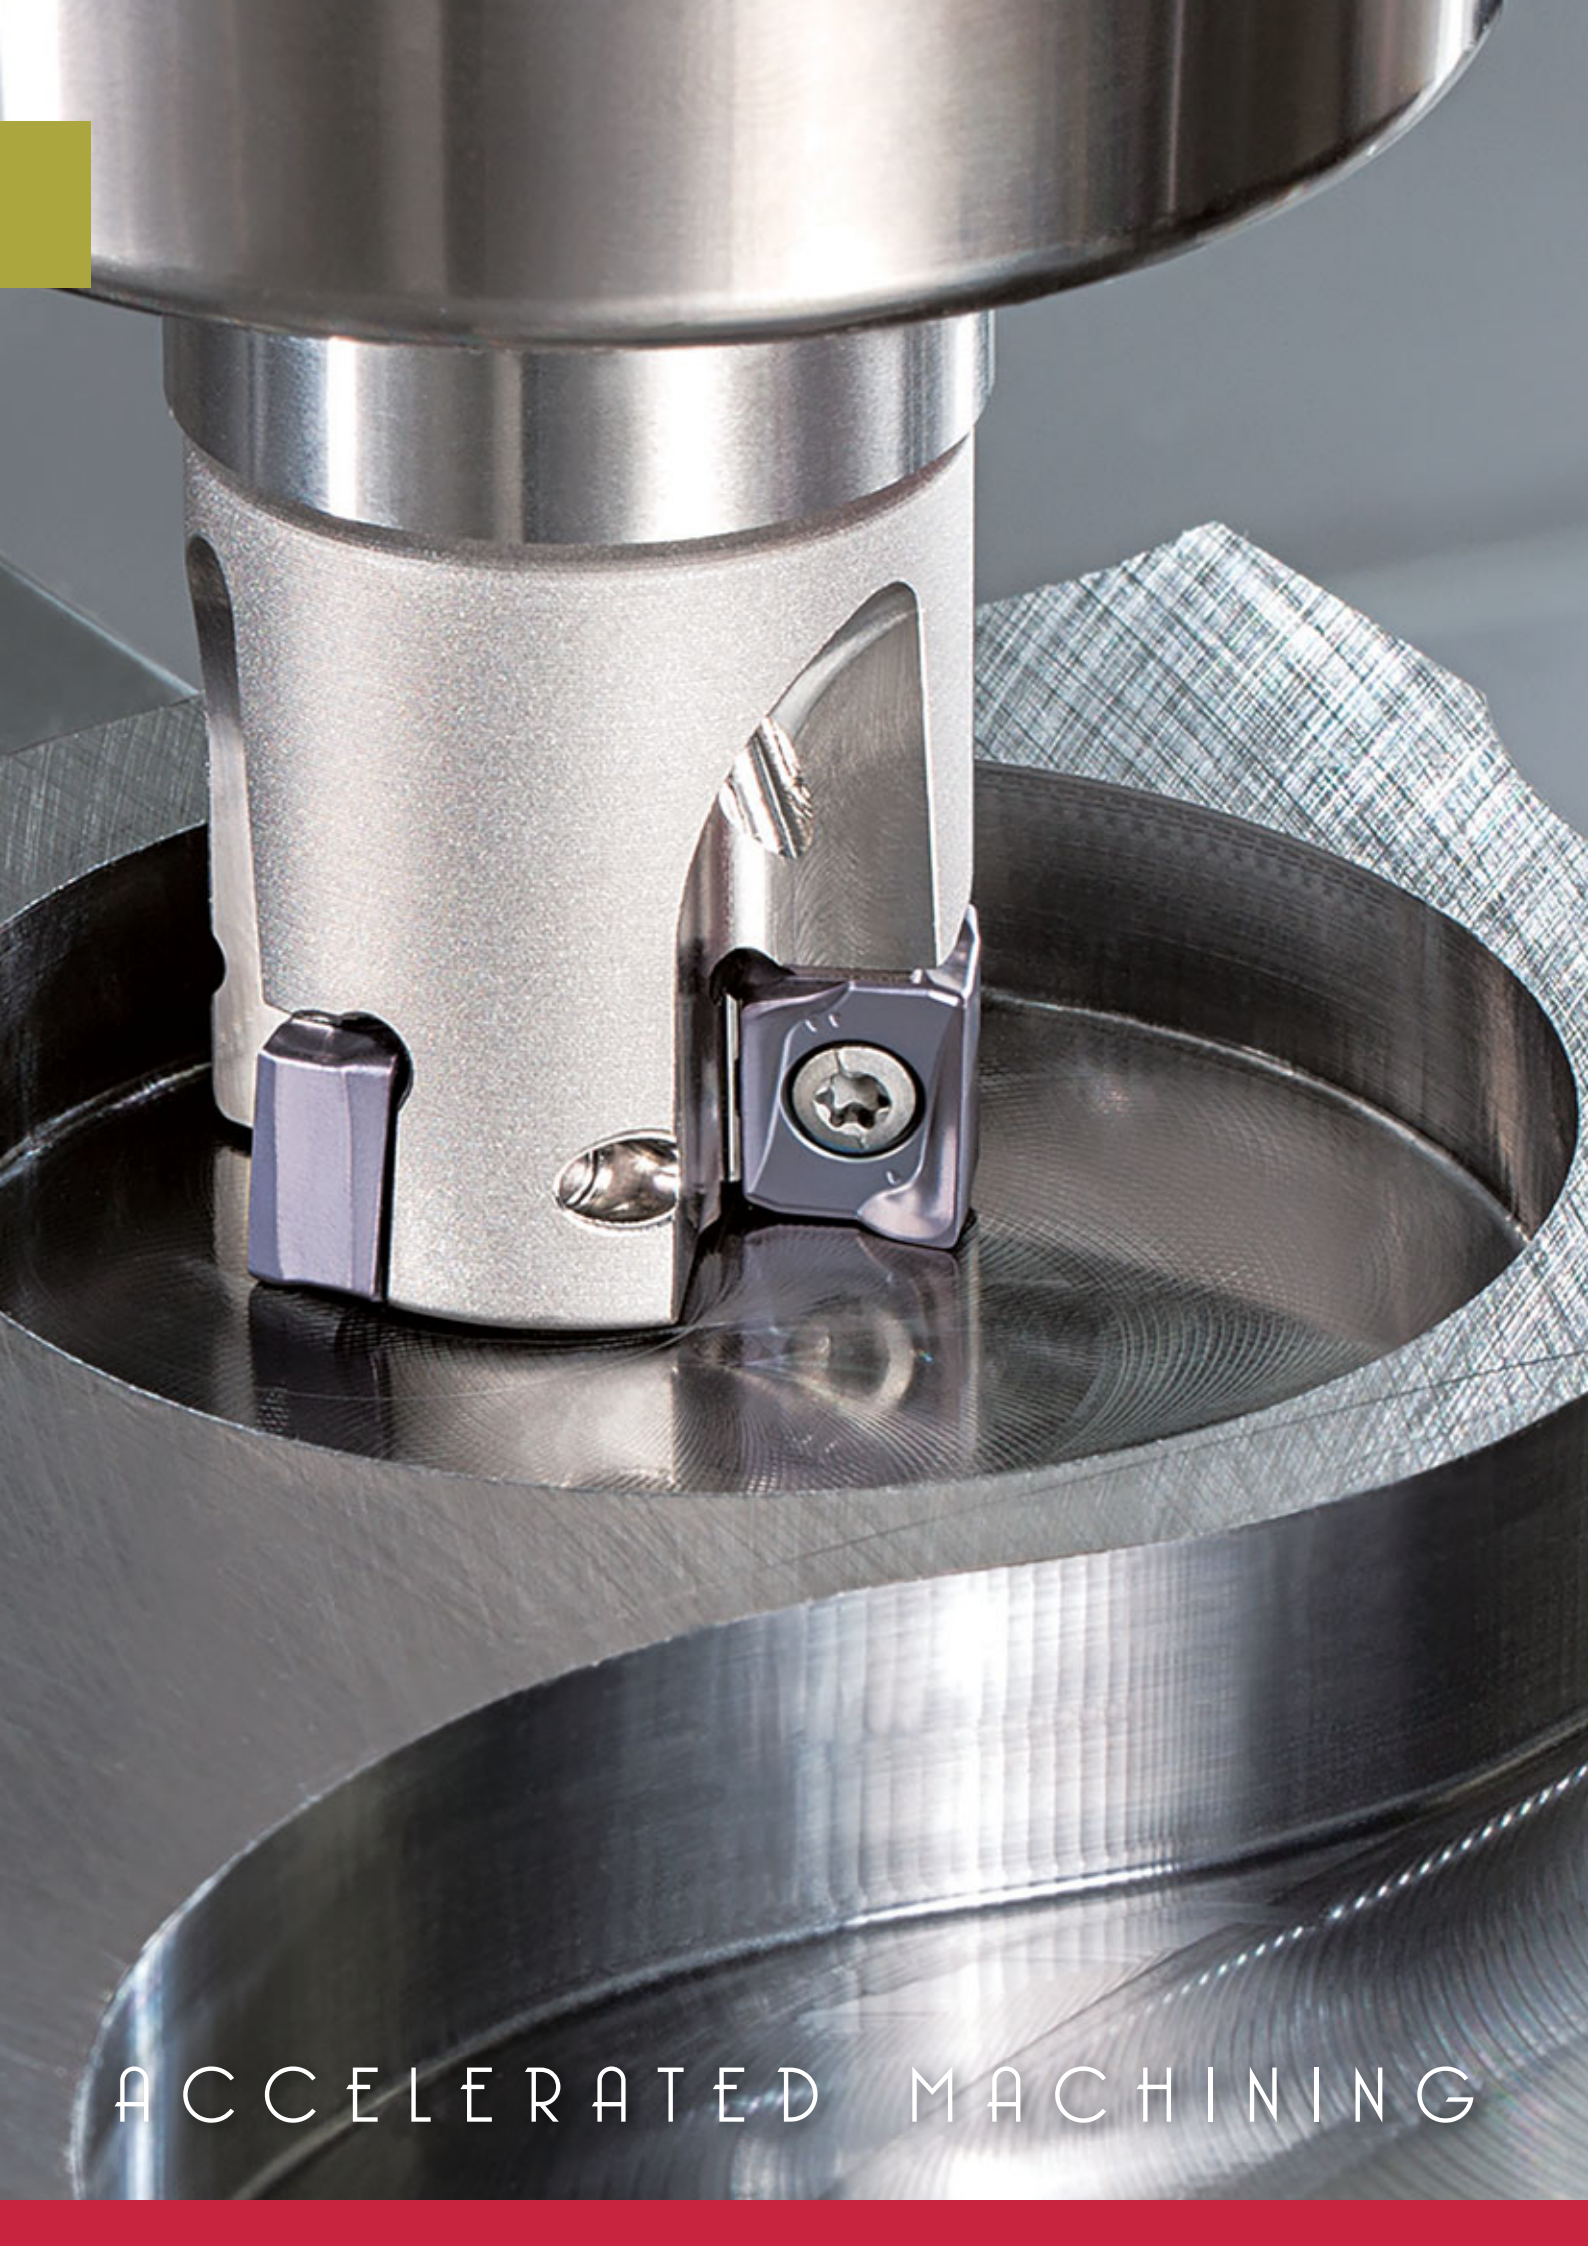


ACCELERATED MACHINING




Optimized cutting edge integrity for **maximum productivity and tool reliability**

Inserts for Best Economy and Efficiency!

Broad range of economical inserts

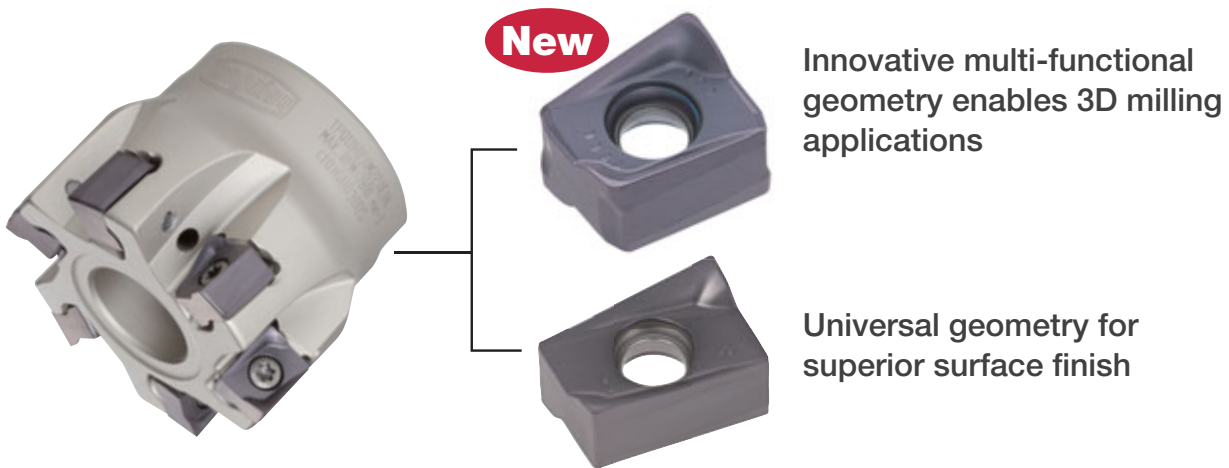


■ Superior cutting edge integrity

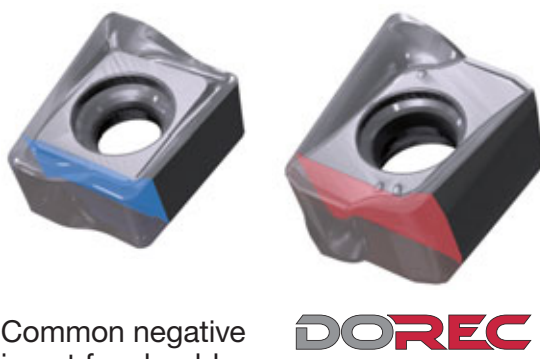


Common negative insert for shoulder milling

Obtuse cutting edge

— **DOREC**
— Common insert profile



Higher rake angle!

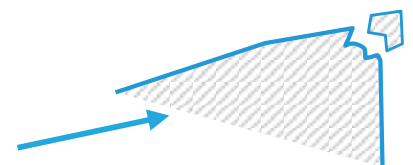

Where negative inserts fail ...



Obtuse cutting edge does not fracture!

■ Higher feed-per-tooth capability


Feed per tooth: f_z (mm/t)

	0.1	0.15	0.2	0.25	0.3	0.35	0.4
Competitor	○	○	○	x : Tool damage			
DOREC	○	○	○	○	○	○	○

Cutter : TPQ11R050M22.0-06 (DC = 50 mm, z = 6)
 Insert : LQMU110708PXER-MJ AH3135
 Grade : AH3135
 Material : S55C (200HB)
 Cutting Speed : 200 m/min
Cutting depth : 4 mm
 Cutting width : 42.5 mm
 Coolant : Dry
 Machine : Vertical M/C, 22 kW

Optimized insert geometry


New



Unique clearance design enables 3D milling

Better machining efficiency by high-feed circular ramping


Comparison of M.R.R.

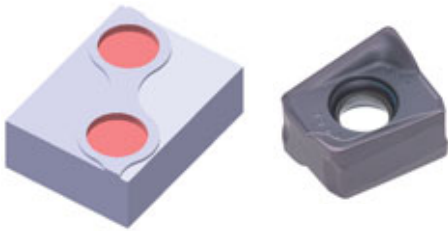

Circular ramping
Material: S55C / C55 (200HB)
Machine: Ver MC, BT50

Cutting conditions	DOREC	Competitor
Cutter	EPQ11R032M32.0-03 (DC = 32 mm, z = 3)	DC = 32 mm, z = 3
Insert	LQMU110708PXR-MJ AH3135	2-edged inserts P30 equivalent
Cutting speed: V_c (m/min)	200	
Depth of cut: a_p (mm)	2 (pitch of a helix)	
Feed per tooth: f_z (mm/t)	0.4	0.2
Metal removal rate: Q (cc/min)	152.8	76.4
Width of cut: a_e (mm)	$\varnothing 62$ mm, Hole making	

Universal insert geometry for superior surface finish




Wiper edge for high surface finish quality

Free cutting geometry

Free-cutting geometry and superior surface finish

Provides free cutting as positive inserts and wiper effect


Surface finish

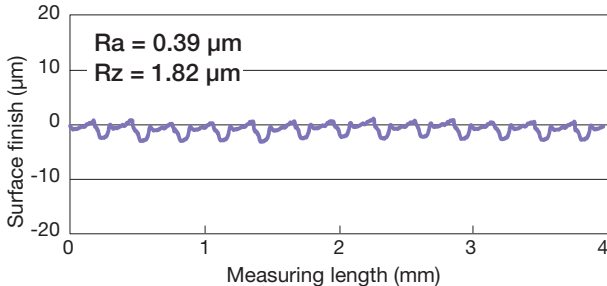

► **Superior surface finish quality achieved by economical inserts!**

Cutter : TPQ18R050M22.0E03
(DC = 50 mm, z = 3)
Insert : LQMU1808008PNER-MJ
Grade : AH725
Workpiece material : S55C / C55 (200HB)
Cutting speed : $V_c = 150$ m/min
Feed per tooth : $f_z = 0.1$ mm/t
Depth of cut : $a_p = 10$ mm
Width of cut : $a_e = 50$ mm
Coolant : Wet
Machine : Vertical M/C, BT50

Spindle load comparison

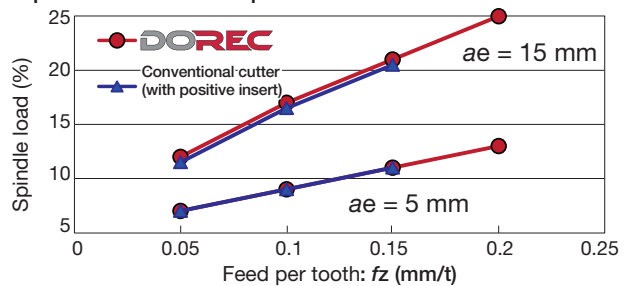


► **Similar load levels as a conventional tool!**

Cutter : EPQ18R040M32.0W03
(DC = 40 mm, z = 3)
Insert : LQMU1808008PNER-MJ
Workpiece material : S55C / C55 (200HB)
Cutting speed : $V_c = 150$ m/min
Depth of cut : $a_p = 16$ mm
Coolant : Wet
Machine : Vertical M/C, BT50

CUTTING PERFORMANCE

Tool life comparison: steel machining

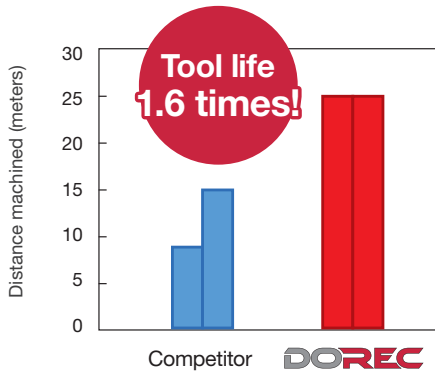


P

Cutter : TPQ11R050M22.0-06 (DC = 50 mm, z = 6)
 Insert : LQMU110708PXER-MJ
 Grade : AH3135
 Workpiece material : S55C (200HB)
 Cutting speed : $V_c = 150$ m/min
 Feed per tooth : $f_z = 0.2$ mm/t
 Cutting depth : $a_p = 5.0$ mm
 Cutting width : $a_e = 30$ mm
 Coolant : Dry
 Number of inserts : 1 insert
 Machine : Vertical M/C, 22 kW

A combination of strong cutting edge geometry and high wear resistant AH3135, treated by PremiumTec, yielded longer tool life and superior machining stability over the competitor's.

Tool life comparison: stainless steel machining

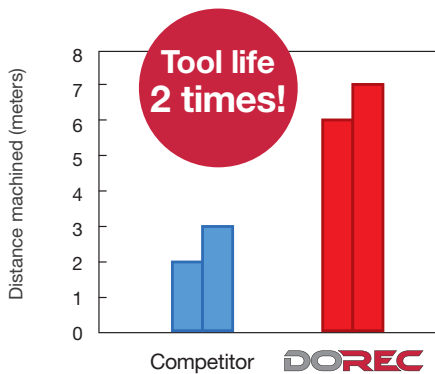

M


Cutter : TPQ11R050M22.0-06 (DC = 50 mm, z = 6)
 Insert : LQMU110708PXER-MJ
 Grade : AH3135
 Workpiece material : SUS304 (180HB)
 Cutting speed : $V_c = 150$ m/min
 Feed per tooth : $f_z = 0.2$ mm/t
 Cutting depth : $a_p = 5.0$ mm
 Cutting width : $a_e = 30$ mm
 Coolant : Dry
 Number of inserts : 1 insert
 Machine : Vertical M/C, 22 kW

Free cutting action with reduced built-up edge and thermal cracks. Superior cutting edge integrity eliminated notch wear, delivering more stable and longer tool life over the competitor's.

TPQ11,18

Square shoulder milling cutter, bore type, with rectangular double-sided LQMU inserts

A.R. = +4° ~ +5°, R.R. = +13° ~ +15°

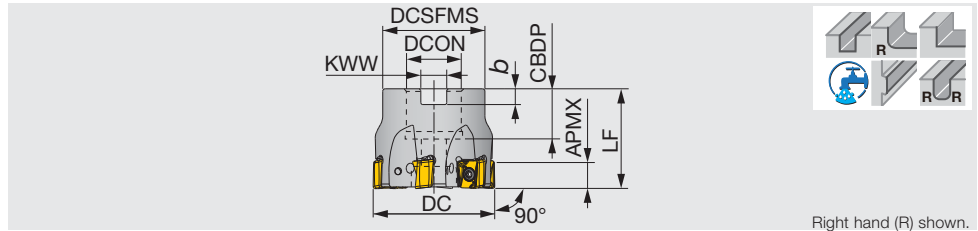

Right hand (R) shown.

Designation	APMX	DC	z	DCSFMS	LF	DCON	CBDP	KWW	b	Kg	Air hole	Insert
TPQ11R040M16.0E04	9	40	4	35	40	16	20	8.4	5.6	0.2	with	LQMU1107...
TPQ11R050M22.0E06	9	50	6	41	40	22	20	10.4	6.3	0.4	with	LQMU1107...
TPQ11R063M22.0E07	9	63	7	47	40	22	20	10.4	6.3	0.5	with	LQMU1107...
TPQ11R080M25.4-10	9	80	10	55	50	25.4	26	9.5	6	1.1	with	LQMU1107...
TPQ11R080M27.0E10	9	80	10	58	50	27	26	12.4	7	1	with	LQMU1107...
TPQ11R100M31.7-12	9	100	12	66	50	31.75	32	12.95	8	1.6	with	LQMU1107...
TPQ11R100M32.0E12	9	100	12	66	50	32	32	14.4	8	1.6	with	LQMU1107...
TPQ18R050M22.0E03	16	50	3	47	40	22	20	10.4	6.3	0.4	with	LQMU1808...
TPQ18R063M25.4-04	16	63	4	55	50	25.4	26	9.5	6	0.7	with	LQMU1808...
TPQ18R063M27.0E04	16	63	4	58	50	27	26	12.4	7	0.5	with	LQMU1808...
TPQ18R080M25.4-05	16	80	5	55	50	25.4	26	9.5	6	0.9	with	LQMU1808...
TPQ18R080M27.0E05	16	80	5	58	50	27	26	12.4	7	0.9	with	LQMU1808...
TPQ18R100M31.7-06	16	100	6	70	50	31.75	32	12.95	8	1.4	with	LQMU1808...
TPQ18R100M32.0E06	16	100	6	66	50	32	32	14.4	8	1.4	with	LQMU1808...
TPQ18R125M38.1-08	16	125	8	80	63	38.1	38	15.9	10	2.9	with	LQMU1808...
TPQ18R125M40.0E08	16	125	8	82	63	40	38	16.4	9	2.9	with	LQMU1808...
TPQ18R160M50.8-09	16	160	9	100	63	50.8	38	19	11	4.1	without	LQMU1808...
TPQ18R160M40.0E09	16	160	9	100	63	40	38	16.4	9	4.1	without	LQMU1808...

SPARE PARTS




Designation	Clamping screw	Grip	Grip 1	Torx bit	Center bolt
TPQ11R040M...	CSTB-3.5L115	SW6-SD	-	BLDT10/S7	CM8x30H
TPQ11R050M...	CSTB-3.5L115	SW6-SD	-	BLDT10/S7	CM10x30H
TPQ11R063M...	CSTB-3.5L115	SW6-SD	-	BLDT10/S7	CM10x30H
TPQ11R080M...	CSTB-3.5L115	SW6-SD	-	BLDT10/S7	CM12x30H
TPQ11R100M...	CSTB-3.5L115	SW6-SD	-	BLDT10/S7	TMBA-M16H
TPQ18R050M...	SR14-591	-	H-TB	BT20M	CM10x30H
TPQ18R063M...	SR14-591	-	H-TB	BT20M	CM12x30H
TPQ18R080M...	SR14-591	-	H-TB	BT20M	CM12x30H
TPQ18R100M...	SR14-591	-	H-TB	BT20M	TMBA-M16H
TPQ18R125M...	SR14-591	-	H-TB	BT20M	TMBA-M20H
TPQ18R160M...	SR14-591	-	H-TB	BT20M	-

EPQ11,18

Square shoulder milling cutter, shank type, with rectangular double-sided LQMU inserts

A.R. = +4° ~ +5°, R.R. = +13° ~ +15°

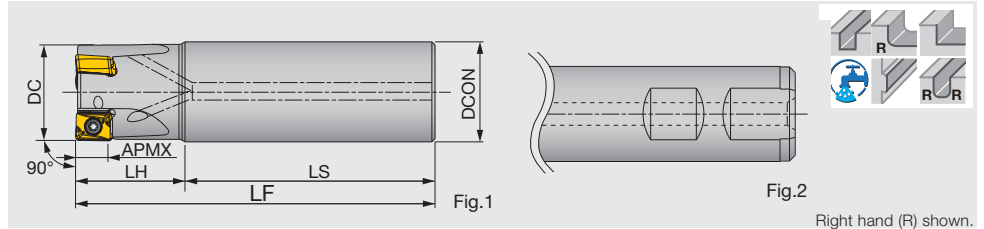

Right hand (R) shown.

Designation	APMX	DC	z	DCON	LS	LH	LF	Kg	Air hole	Insert	Shank style
EPQ11R025M25.0-02	9	25	2	25	70	30	100	0.3	with	LQMU1107...	Fig.1
EPQ11R032M32.0-03	9	32	3	32	80	35	115	0.7	with	LQMU1107...	Fig.1
EPQ11R040M32.0-04	9	40	4	32	80	35	115	0.8	with	LQMU1107...	Fig.1
EPQ11R050M32.0-05	9	50	5	32	80	40	120	0.9	with	LQMU1107...	Fig.1
EPQ11R063M32.0-06	9	63	6	32	80	40	120	1.1	with	LQMU1107...	Fig.1
EPQ11R080M32.0-07	9	80	7	32	80	40	120	1.4	with	LQMU1107...	Fig.1
EPQ18R040M32.0W03	16	40	3	32	75	35	110	0.7	with	LQMU1808...	Fig.2
EPQ18R050M32.0W04	16	50	4	32	75	40	115	0.9	with	LQMU1808...	Fig.2

SPARE PARTS




Designation	Clamping screw	Grip	Grip 1	Torx bit	Wrench
EPQ11...	CSTB-3.5L115	SW6-SD	-	BLDT10/S7	T-10D
EPQ18...	SR14-591	-	H-TB	BT20M	T-20D


INSERTS

LQMU11-PXER-MJ

New

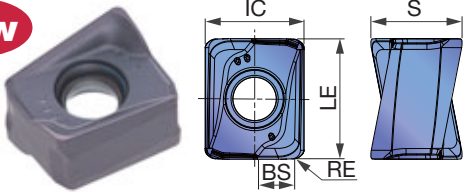

LQMU11/18-PNER-MJ

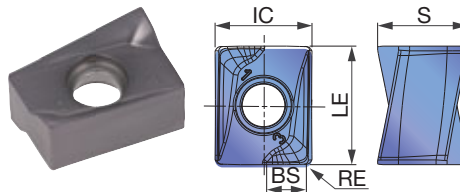

P Steel	☆	★	★	
M Stainless		★	☆	★
K Cast iron	★		☆	
N Non-ferrous				
S Superalloys	★		★	☆
H Hard materials				

★ : First choice
☆ : Second choice

Designation	RE	APMX	Coated				LE	S	IC	BS	Cutter
			AH120	AH140	AH725	AH3135					
LQMU110704PNER-MJ	0.4	9	●	●	●		11	8.3	9	1.5	EPQ11R, TPQ11R
LQMU110708PNER-MJ	0.8	9	●	●	●		11	8.3	9	1.1	EPQ11R, TPQ11R
New LQMU110708PXER-MJ	0.8	9	●			●	11	8.3	9	1.1	EPQ11R, TPQ11R
LQMU110716PNER-MJ	1.6	9	●	●	●		11	8.3	9	0.3	EPQ11R, TPQ11R
LQMU110720PNER-MJ	2	9	●				11	8.3	9	-	EPQ11R, TPQ11R
LQMU180804PNER-MJ	0.4	16	●	●	●		17.5	10.9	11.5	2.0	EPQ18R, TPQ18R
LQMU180808PNER-MJ	0.8	16	●	●	●		17.5	10.9	11.5	1.6	EPQ18R, TPQ18R
LQMU180816PNER-MJ	1.6	16	●	●	●		17.5	10.9	11.5	0.8	EPQ18R, TPQ18R
LQMU180824PNER-MJ	2.4	16	●	●	●		17.5	10.9	11.5	-	EPQ18R, TPQ18R

●: Line up

STANDARD CUTTING CONDITIONS

LQMU11-PXER-MJ

ISO	Workpiece material	Hardness	Grade	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
P	Low carbon steel S15C, etc. C15E, etc.	- 200HB	AH3135	100 - 250	0.1 - 0.25*
	Alloy steel S55C, etc. C55, etc.	- 300HB	AH3135	100 - 230	0.1 - 0.2*
	Prehardened steel NAK80, PX5, etc.	30 - 40HRC	AH3135	100 - 230	0.1 - 0.2*
M	Stainless steel SUS304, etc. X5CrNi18-9, etc.	-	AH3135	90 - 180	0.1 - 0.25*
K	Grey cast iron FC250, etc. 250, etc.	150 - 250HB	AH120	140 - 250	0.1 - 0.25*
	Ductile cast iron FCD400, etc. 450-10S, etc.	150 - 250HB	AH120	110 - 200	0.1 - 0.25*
S	Titanium alloys Ti-6Al-4V, etc.	-	AH120	30 - 60	0.08 - 0.2*
	Superalloys Inconel 718, etc.	-	AH120	20 - 50	0.06 - 0.1*
H	Hardened steel	SKD61, etc.	AH120	45 - 70	0.08 - 0.15*
		SKD11, etc.	AH120	40 - 65	0.06 - 0.1*

LQMU11/18-PNER-MJ

ISO	Workpiece material	Hardness HB	Grade	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
P	Low carbon steel S15C, etc. C15E, etc.	- 200	AH725	100 - 250	0.1 - 0.25*
	High carbon steel S45C, S55C, etc. C45, C55, etc.	200 - 300	AH725	100 - 230	0.1 - 0.2*
	Alloy steel SCM440, SCr415, etc. 42CrMo4, etc.	150 - 300	AH725	100 - 230	0.1 - 0.2*
	Tool steel D2, etc. X153CrMoV12, etc.	- 300	AH725	100 - 180	0.1 - 0.2*
M	Stainless steel SUS304, etc. X5CrNi18-9, etc.	-	AH140	90 - 180	0.1 - 0.25*
K	Grey cast iron FC250, etc. 250, etc.	150 - 250	AH120	140 - 250	0.1 - 0.25*
	Ductile cast iron FCD400, etc. 450-10S, etc.	150 - 250	AH120	110 - 200	0.1 - 0.25*
S	Superalloys Inconel 718, Ti-6Al-4V, etc.	-	AH725	20 - 50	0.08 - 0.2*

* When using LQMU11 inserts, see page 13 for proper feed per tooth setting.


· For applications with poor chip evacuation, use air gun to remove chips from the machining area to avoid chip re-cutting and part damage.

· To machine cast surface with unstable cutting depths or interruptions, it is recommended to lower the feed rate (fz) to the lowest parameter in the recommended range.

· Rigidity of the machine and/or workpiece and the spindle power capability greatly influence the cutting conditions. For applications with large cutting width/depth and/or long tool overhang, start with a Vc and fz in the lower range of the recommended cutting parameters and monitor the machine stability.

APPLICATION RANGE

New LQMU11-PXER-MJ

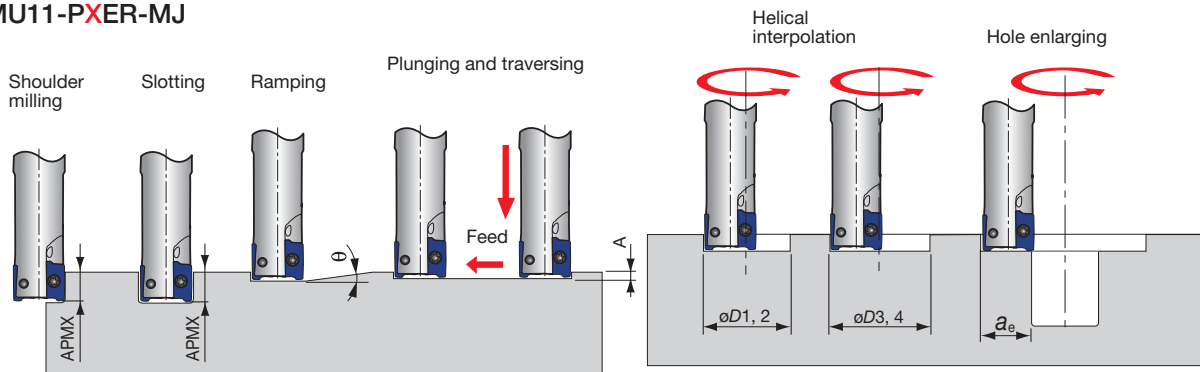


Designation	DC	Max. depth of cut	Max. ramping angle	Max. plunging	Min. machining	Max. machining			Max. cutting width in enlarging	
		APMX	θ	A	$\phi D1$	$\phi D2^*$	$\phi D3$	$\phi D4^*$	RE	ae
EPQ11R025...	25	9	1.8°	0.6	35	46.8	49	48.5	0.8	24.1
EPQ11R032...	32	9	1.3°	0.6	48	60.8	63	62.5	0.8	31.1
TPQ11R040...	40	9	0.9°	0.6	64	76.8	79	78.5	0.8	39.1
TPQ11R050...	50	9	0.7°	0.6	84	96.8	99	98.5	0.8	49.1
TPQ11R063...	63	9	0.5°	0.6	110	122.8	125	124.5	0.8	62.1
TPQ11R080...	80	9	0.4°	0.6	144	156.8	159	158.5	0.8	79.1
TPQ11R100...	100	9	0.3°	0.6	184	196.8	199	198.5	0.8	99.1

*For a flat bottom

NOTE WHEN USING LQMU11 INSERTS


Maximum feed rate per tooth varies depending on the cutting depth and width.
Use proper feed rate as described below.
Use caution. Tool may damage if the parameters are not properly set.

Applicable feed rate (for $a_e < 10\%$ of tool diameter)

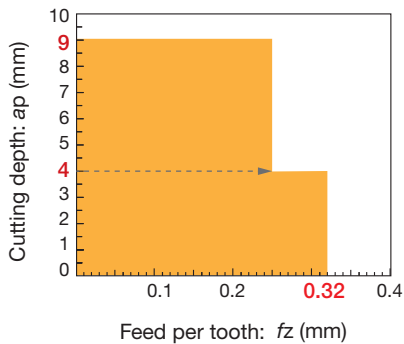



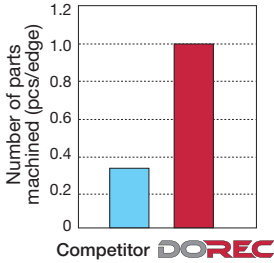
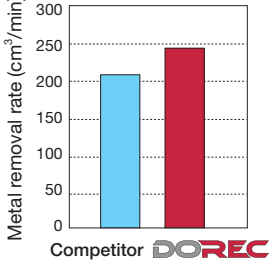
Cutter : TPQ11R050M22.0-06 (DC = 50 mm, z = 6)
Insert : LQMU110708PXER-MJ
Grade : AH3135
Workpiece material : S55C (200HB)
Cutting Speed : $V_c = 200$ m/min
Cutting width : $a_e = 5$ mm
Coolant : Dry
Machine : Vertical M/C, 22 kW



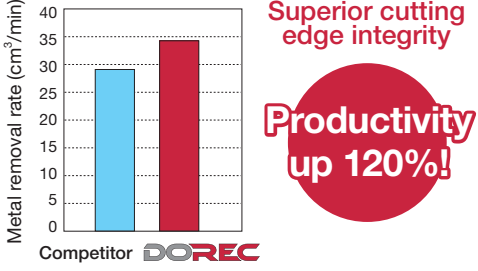
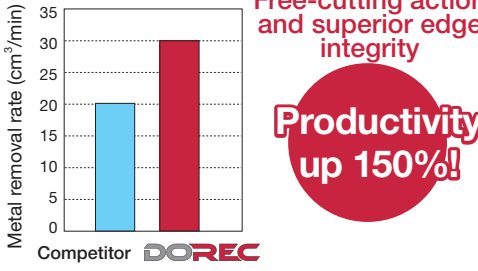
Applicable feed rate (for $a_e > 10\%$ of tool diameter)

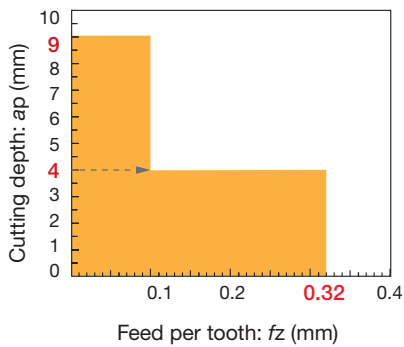





Cutter : TPQ11R050M22.0-06 (DC = 50 mm, z = 6)
Insert : LQMU110708PXER-MJ
Grade : AH3125
Workpiece material : S55C (200HB)
Cutting Speed : $V_c = 200$ m/min
Cutting width : $a_e = 42.5$ mm
Coolant : Dry
Machine : Vertical M/C, 22 kW

PRACTICAL EXAMPLES

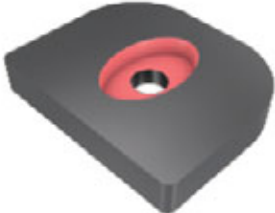
Workpiece type	Flange sheet	Machine parts
Milling cutter	TPQ11R080M27.0E10 (ø80, z = 10)	TPQ11R050M22.0E06 (ø50, z = 6)
Insert	LQMU110708PXER-MJ	LQMU110708PXER-MJ
Grade	AH3135	AH3135
Workpiece material	Martensitic stainless steel	S55C / C55
		
Cutting conditions	Cutting speed: V_c (m/min)	180
	Feed per tooth: f_z (mm/t)	0.15
	Feed speed: V_f (mm/min)	1074
	Depth of cut: a_p (mm)	1.0 (at 1.0 mm helix pitch)
	Width of cut: a_e (mm)	50
	Application	Hole enlargement by helical interpolation
	Coolant	Dry
	Machine	Vertical M/C, BT50
Results	 <p>Strong cutting edge</p> <p>Tool life 3 times!</p> <p>Competitor DOREC</p> <p>Competitor's positive round inserts repetitively fractured. DoRec insert's multifunctional geometry provided stable machining thanks to its strong cutting edge geometry.</p>	 <p>Free cutting action</p> <p>Improved productivity 1.1 times!</p> <p>Competitor DOREC</p> <p>Overloaded cutting force and vibration were causing the competitor's inserts unpredictable tool life. DoRec insert's multifunctional geometry is optimized for chatter stability, ensuring reliable machining.</p>

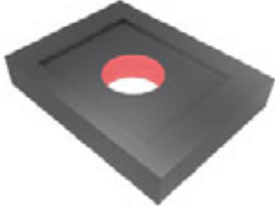Workpiece type		Base plate	Eccentric countersink	
Milling cutter		TPQ11R040M16.0E04 (ø40, z = 4)	EPQ11R032M32.0-03 (ø32, z = 3)	
Insert		LQMU110708PXER-MJ	LQMU110708PXER-MJ	
Grade		AH120	AH3135	
		SS400 / E275A	SUS304	
Workpiece material		 P	 M	
Cutting conditions	Cutting speed: V_c (m/min)	176	150	
	Feed per tooth: f_z (mm/t)	0.15 (Competitor: $f_z = 0.12$)	0.45 (Competitor: $f_z = 0.3$)	
	Feed speed: V_f (mm/min)	860 (Competitor: $V_f = 720$)	2000 (Competitor: $V_f = 1350$)	
	Depth of cut: a_p (mm)	4 (0.38°ramp approach)	1.0 (at 1.0 mm helix pitch)	
	Width of cut: a_e (mm)	10	15	
	Application	Hole enlargement, helical interpolation	Hole enlargement, helical interpolation	
	Coolant	External supply	External supply	
Machine	Vertical M/C, BT50	Vertical M/C, BT40		
Results	 <p>Superior cutting edge integrity</p> <p>Productivity up 120%!</p> <p>Competitor DOREC</p> <p>Competitor's inserts fractured at high feed rates. DoRec inserts enabled stable machining at higher feed rates thanks to its unique insert geometry.</p>		 <p>Free-cutting action and superior edge integrity</p> <p>Productivity up 150%!</p> <p>Competitor DOREC</p> <p>Competitor's inserts fractured at high feed rates, and repetitive notch wears shortened the tool life. DoRec inserts enabled stable machining at higher feed rates thanks to its superior cutting edge integrity, extending tool life 1.3x .</p>	


ACCELERATED MACHINING

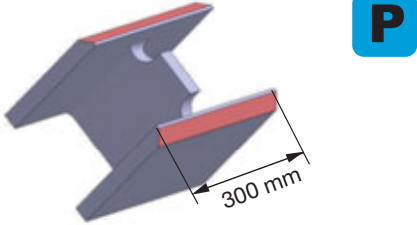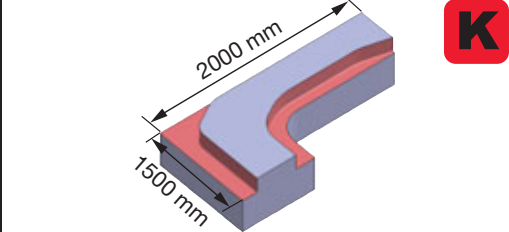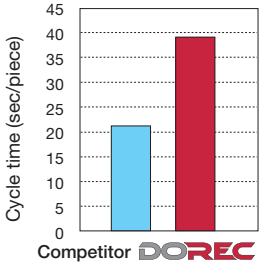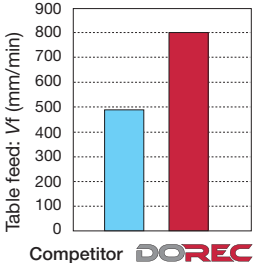Workpiece type	Machine part	Press mold
Milling cutter	EPQ11R032M32.0-03	TPQ18R080M25.4-05
Insert	LQMU110708PNER-MJ	LQMU180816PNER-MJ
Grade	AH725 SS400 / E275A (150HB)	AH120 FC250 / GG25 / 250 (180HB)
Workpiece material		
Cutting conditions	Cutting speed: V_c (m/min)	200
	Feed per tooth: f_z (mm/t)	0.2
	Feed speed: V_f (mm/min)	1194
	Depth of cut: a_p (mm)	8
	Width of cut: a_e (mm)	4
	Application	Side milling
	Coolant	Dry
Machine	Vertical M/C, BT50	Vertical M/C, BT50
Results	 <p>Superior cutting edge integrity</p> <p>Improved productivity 1.8 times!</p> <p>Competitor DOREC</p> <p>Competitor's inserts repeatedly fractured. DoRec inserts enabled machining at higher feed rates thanks to its superior edge integrity.</p>	 <p>Superior cutting edge integrity</p> <p>Productivity up 160%!</p> <p>Competitor DOREC</p> <p>Superior edge integrity enabled machining at higher feed rates, improving cycle time.</p>


MEMO

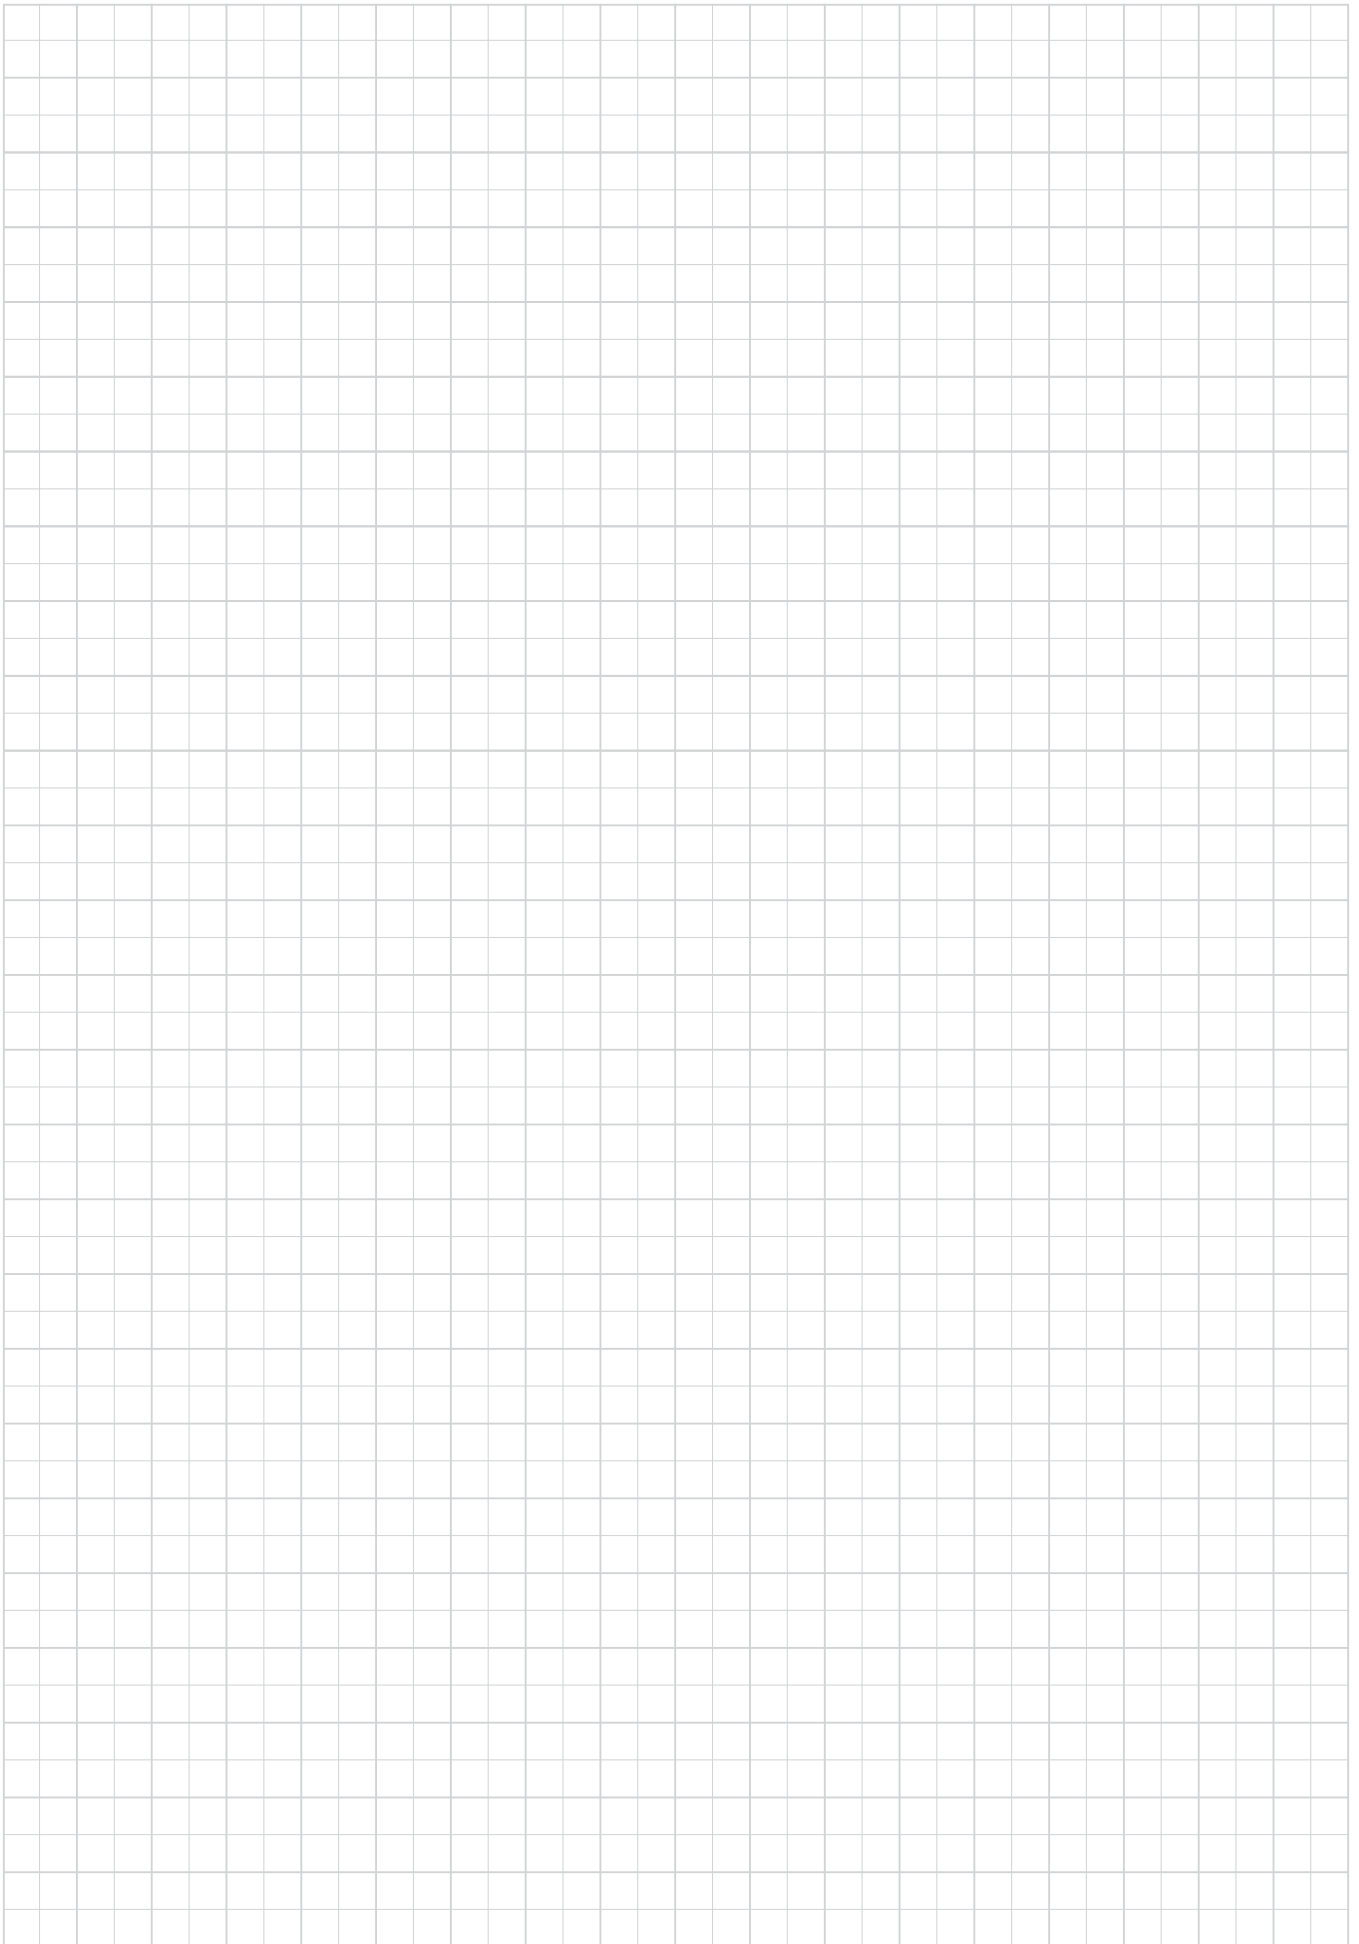A large grid of graph paper for taking notes, consisting of 20 columns and 30 rows of small squares.



MEMO

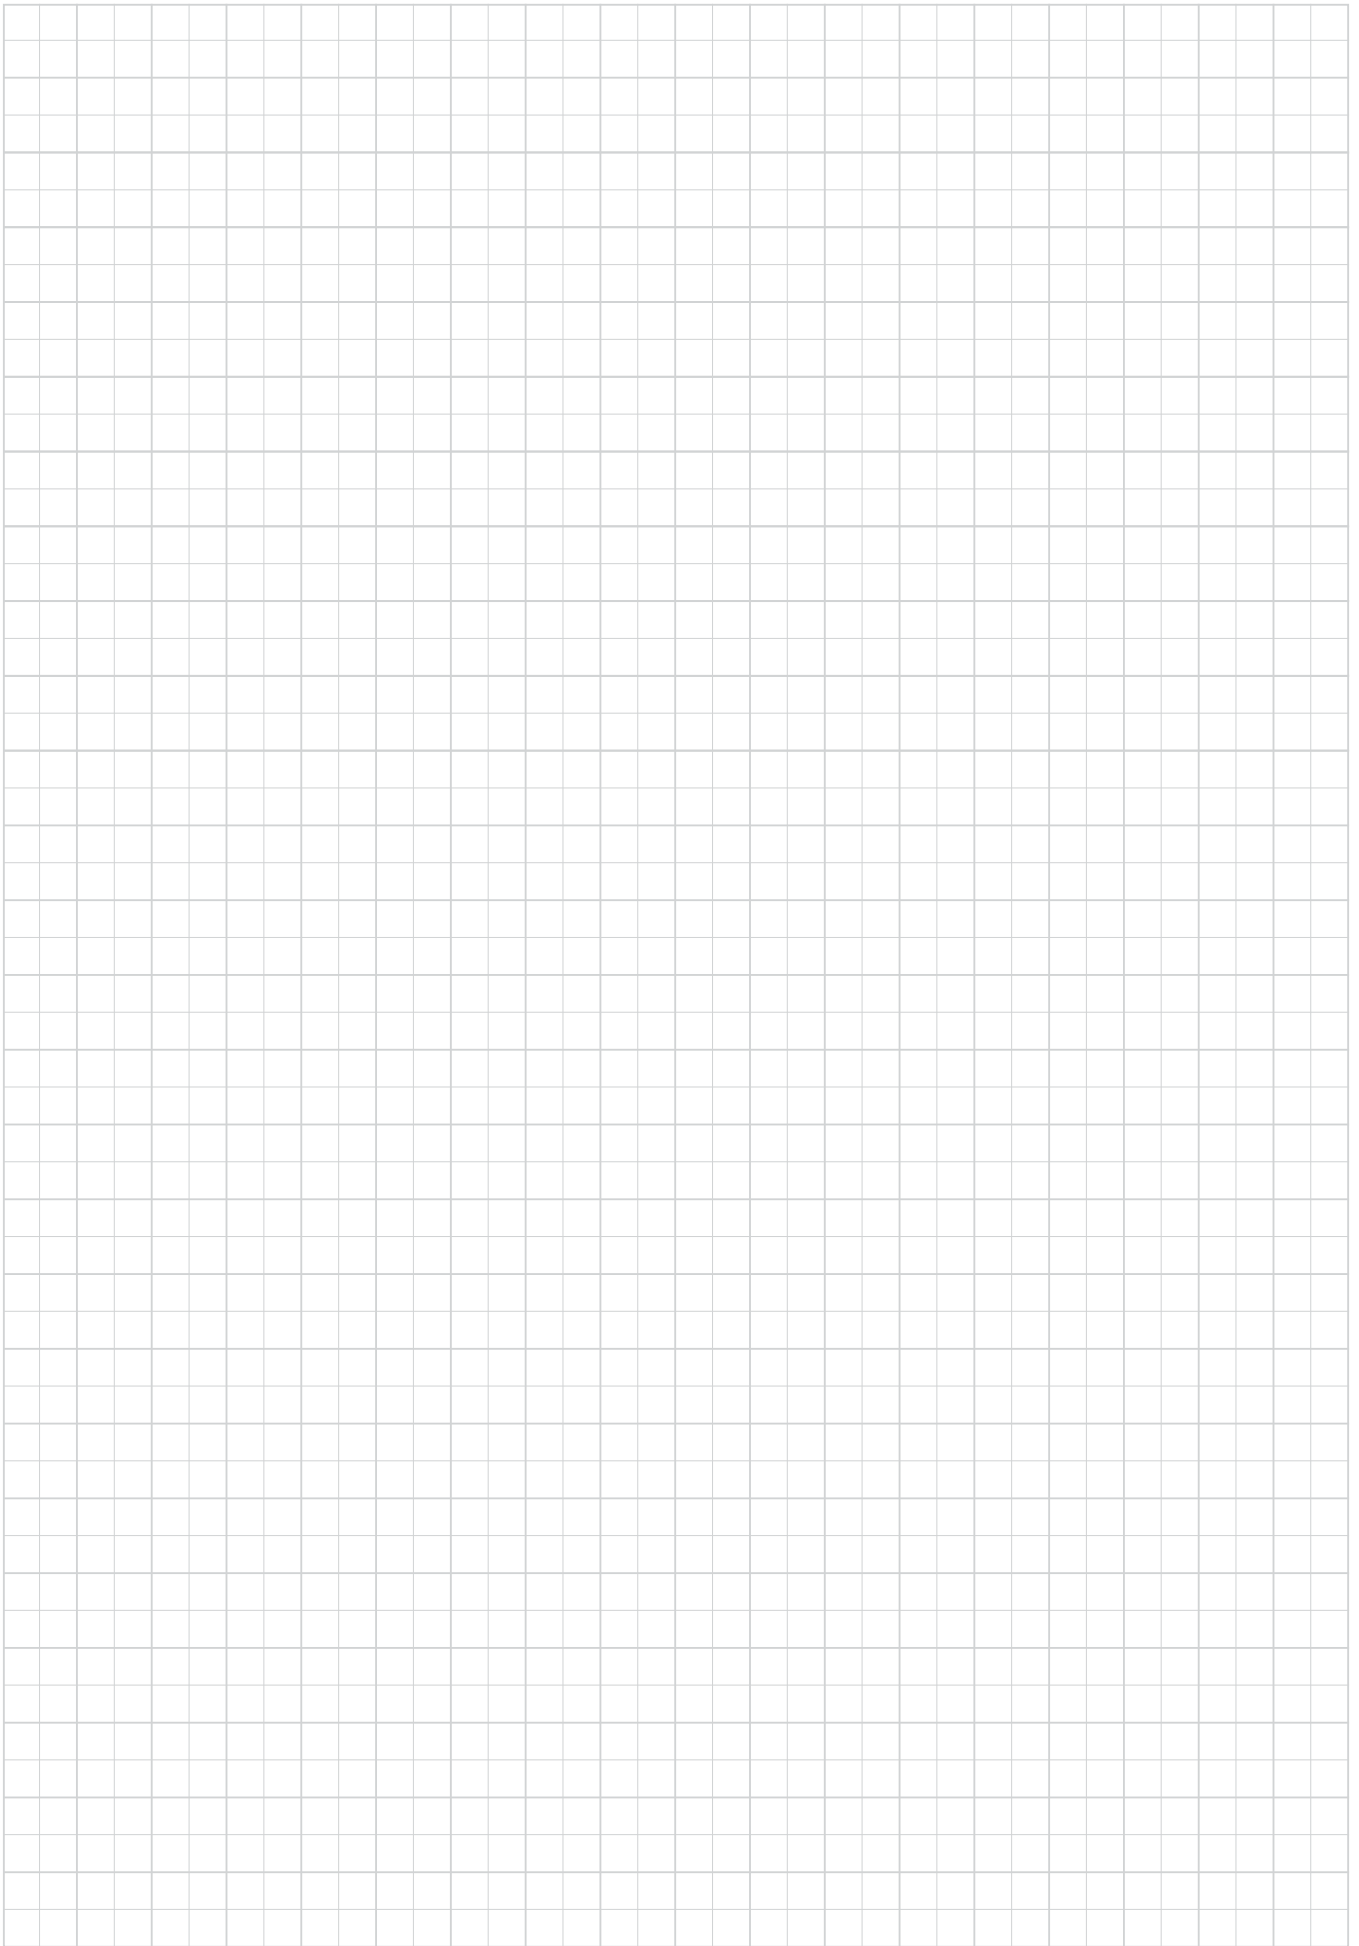A large grid of graph paper for writing notes. The grid consists of 20 columns and 30 rows of small squares. The grid is empty and occupies most of the page.

MEMO

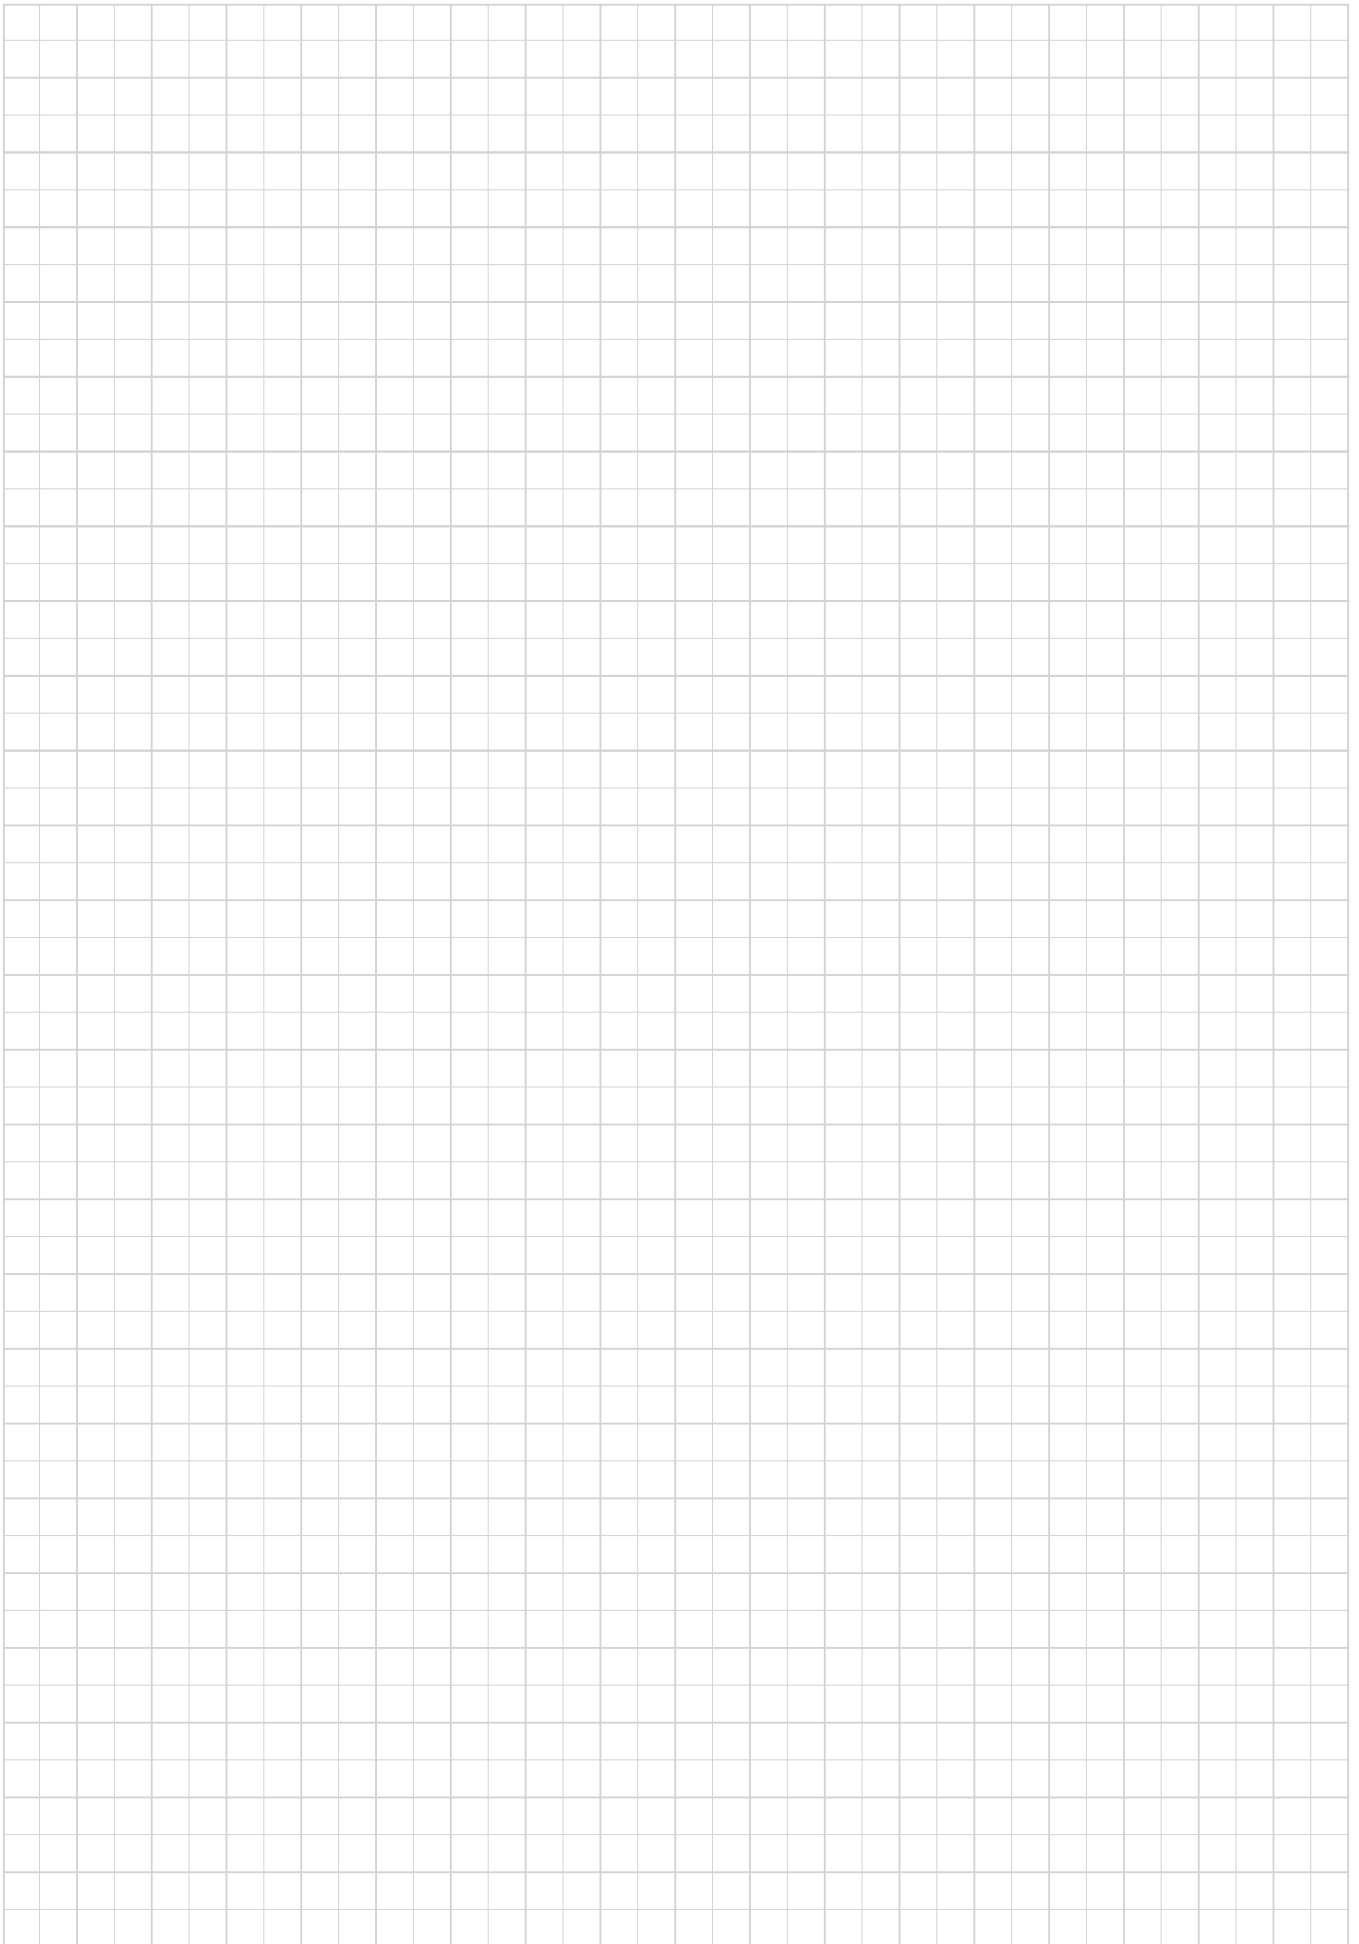A large grid of graph paper for taking notes, consisting of 20 columns and 30 rows of small squares.

Check our site and our App to get more info!

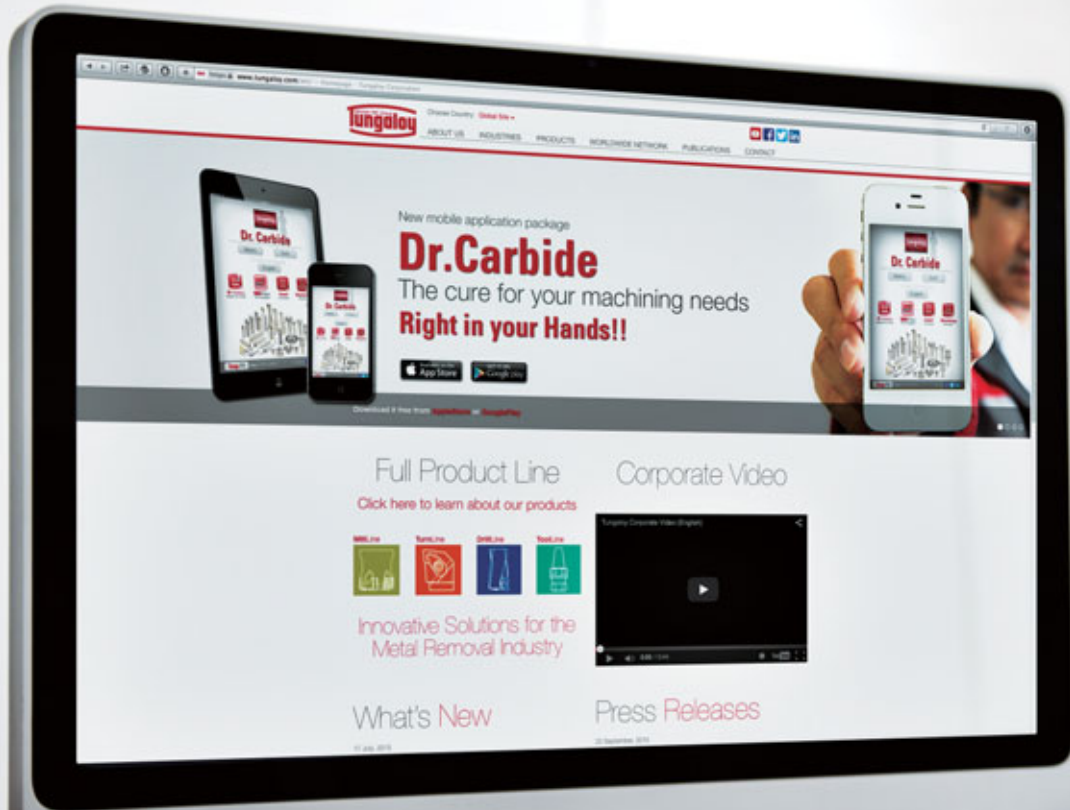

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima, 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloyamerica.com

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy de Mexico S.A.

C Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.de

Tungaloy France S.A.S.

ZA Courtaboef - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboef Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
www.tungaloy.se

Tungaloy Rus, LLC

115432, Russian Federation, Moscow,
Andropova avenue., h.18, bld.7, flt. 11,
office 3.
Phone: +7-499-683-01-80/81
www.tungaloy.com/ru

Tungaloy East LLC

620075, Russian Federation, Sverdlovsk
Region, Ekaterinburg, Mamina-Sibiryaka str.,
bldg. 101, room 202
Phone: +7-343-286-48-23/24
Fax: +7-912-284-91-69
www.tungaloy.com/rue

Tungaloy Polska Sp. z o.o.

ul. Genewska 24
03-963 Warszawa, Poland
Phone: +48-22-617-0890
Fax: +48-22-617-0890
www.tungaloy.com/pl

Tungaloy U.K. Ltd

The Technology Centre,
Wolverhampton Science Park
Glaisher Drive, Wolverhampton
West Midlands WV10 9RU, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk
salesinfo@tungaloyuk.co.uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu
info@tungaloytools.hu

Tungaloy Turkey

Dudullu, OSB 4. Cad No:4
34776 Umraniye Istanbul, TURKEY
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com.tr
info@tungaloy.com.tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy-benelux.com

Tungaloy Croatia

Josipa Kozarca 4
10432 Bregana, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.hr

Tungaloy Cutting Tool (Shanghai) Co., Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/tcts

Tungaloy Cutting Tool (Thailand) Co., Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.co/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/tspl

Tungaloy Vietnam

LE 04-38, Lexington Residence
67 Mai Chi Tho, Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-8-37406660
Fax: +84-8-37406662
www.tungaloy.com/vsp

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai -400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

PO Box 2232, Rowville,
Victoria 3178, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com.au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



www.tungaloy.com

follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan

To see this product in action visit:

Tung-TV

www.youtube.com/tungaloycorporation

Distributed by:



DOWNLOAD
Dr. Carbide App



FIND US ON THE CLOUD!
machiningcloud.com



Available on the
App Store



GET IT ON
Google play



AS9100 Certified
78006
2015.11.04
ISO14001 Certified
EC97J1123
1997.11.26